


SELF-PRIMING MULTISTAGE CENTRIFUGAL PUMPS



TECHNICAL CATALOGUE

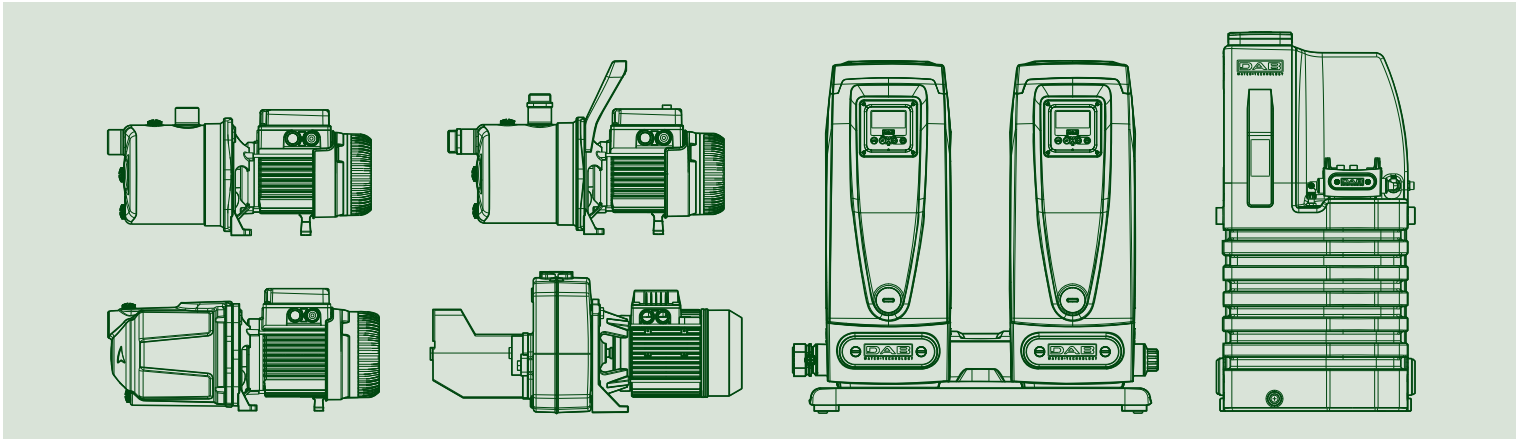

THE INTERNATIONAL CERTIFICATION NETWORK

CERTIFICATE

IQNet and its partner
CISQ/IMQ-CSQ
hereby certify that the organization

DWT HOLDING SPA
VIA MARCO POLO 14 - 35035 MESTRINO (PD)
BRENDOLA (VI) - CASTELLO DI GODEGO (TV) - BIENTINA (PI) -
SAN GERMANO DEI BERICI (VI) - GESSATE (MI) -
PRC CHINA

for the following field of activities
Design, production, sale and assistance of components and electronic controls for pumps, electropumps, and pump sets for cold and hot water for civil, industrial and agricultural use

has implemented and maintains a
Quality Management System
which fulfills the requirements of the following standard

ISO 9001:2008

Issued on: 2013 - 09 - 23 Expiry date: 2015 - 06 - 15

Registration Number: **IT - 824**



Michael Drechsel
Michael Drechsel
President of IQNET



Ing. Claudio Provetti
Ing. Claudio Provetti
President of CISQ

IQNet Partners*:
AENOR Spain AFNOR Certification France AIB-Vingotte International Belgium ANCI-SIGE Mexico APCER Portugal CCC Cyprus
CISQ Italy CQC China CQM China CQS Czech Republic Crc Cert Croatia DQS Holding GmbH Germany DS Denmark
FCAV Brazil IFN DIGNORIMA Venezuela ICONTEC Colombia IMAC Mexico INNORPI Tunisia
Inspects Certification Finland IRAM Argentina IQA Japan KPO Korea MIRTIC Greece MISZ Hungary Nemko AS Norway
NSAI Ireland PCBC Poland Quality Austria Austria RR Russia SII Israel SIQ Slovenia SIRIM QAS International Malaysia
SQS Switzerland SRAC Romania TEST St Petersburg Russia TSE Turkey YUQS Serbia
IQNet is represented in the USA by: AINOR Certification, CISQ, DQS Holding GmbH and NSAI Inc.

* The list of IQNet partners is valid at the time of issue of this certificate. Updated information is available under www.iqnet-certification.com

All. 1 di 1
Ann. 1 of 1



ALLEGATO CERTIFICATO n. **9101.COGE**
ANNEX CERTIFICATE

(*) Unità Operative:
(*) Operative Units:

DAB PUMPS SPA
VIA BONANNO PISANO 1 - 56031 BIENTINA (PI)

TESLA SRL
VIA DEL LAVORO 3 - 36040 SAN GERMANO DEI BERICI (VI)

TESLA SRL
VIA BERGAMO 2 - 20060 GESSATE (MI)

DAB PUMPS QINGDAO CO. LTD.
40 KAITUO ROAD, QINGDAO DEVELOPMENT ZONE - SHANGDONG PROVINCE, PRC CHINA

DATE:	PRIMA CERTIFICAZIONE FIRST CERTIFICATION	EMISSIONE CORRENTE CURRENT ISSUE	SCADENZA EXPIRY
	1995-07-17	2013-09-23	2015-06-15

Spavetti
ING S.p.A. - VIA GURITLIANO, 43 - 20138 MILANO



EA: 18, 19

SOCCORSO DA PARTE
DEL CERTIFICAZIONE
PER IL CASO DI
NON CONFORMITÀ
DEL CLIENTE

La validità del certificato è subordinata a sorveglianza annuale e ricambio completo del Sistema di Gestione con periodici interventi
The validity of the certificate is subjected to annual audit and replacement of the whole management system within three years

CISQ è la Federazione Italiana di Organismi di Certificazione dei Sistemi di Gestione Aziendale.
CISQ is the Italian Federation of management system Certification Bodies.



FEDERAZIONE
CISQ



CERTIFICATO N.
CERTIFICATE N. **9101.COGE**

SI CERTIFICA CHE IL SISTEMA QUALITÀ DI
WE HEREBY CERTIFY THAT THE QUALITY SYSTEM OPERATED BY
DWT HOLDING SPA
VIA MARCO POLO 14 - 35035 MESTRINO (PD)

UNITÀ OPERATIVE
OPERATIVE UNITS
DAB PUMPS
VIA MARCO POLO 14 - 35035 MESTRINO (PD)
DAB PUMPS
VIA EINAUDI 2 - 35040 BRENDOLA (VI)
DAB PUMPS
VIA E. FERMI 6-8-10 - 31030 CASTELLO DI GODEGO (TV)

Vedere gli Allegati per le altre Unità Operative (n° 1 pagina)
View the Annexes for the other Operative Units (n° 1 page)

E' CONFORME ALLA NORMA
IS IN COMPLIANCE WITH THE STANDARD
ISO 9001:2008

PER LE SEGUENTI ATTIVITÀ:
FOR THE FOLLOWING ACTIVITIES

Progettazione, produzione, vendita e assistenza di componenti e controlli elettronici per pompe, elettropompe e gruppi di pompaggio per acqua fredda e calda ad uso civile, industriale ed agricolo
Design, production, sale and assistance of components and electronic controls for pumps, electropumps, and pump sets for cold and hot water for civil, industrial and agricultural use

Riferirsi al manuale della qualità per l'applicabilità dei requisiti della norma ISO 9001:2008
Refer to quality manual for details of applications to ISO 9001:2008 requirements

IL PRESENTE CERTIFICATO E' SOGGETTO AL RISPETTO DEL
REGOLAMENTO PER LA CERTIFICAZIONE DEI SISTEMI DI GESTIONE.
THE USE AND THE VALIDITY OF THE CERTIFICATE SHALL SATISFY THE
REQUIREMENTS OF THE RULES FOR CERTIFICATION OF MANAGEMENT SYSTEMS

DATE:	PRIMA CERTIFICAZIONE FIRST CERTIFICATION	EMISSIONE CORRENTE CURRENT ISSUE	SCADENZA EXPIRY
	1995-07-17	2013-09-23	2015-06-15

Spavetti
ING S.p.A. - VIA GURITLIANO, 43 - 20138 MILANO



EA: 18, 19

SOCCORSO DA PARTE
DEL CERTIFICAZIONE
PER IL CASO DI
NON CONFORMITÀ
DEL CLIENTE

La validità del certificato è subordinata a sorveglianza annuale e ricambio completo del Sistema di Gestione con periodici interventi
The validity of the certificate is subjected to annual audit and replacement of the whole management system within three years

CISQ è la Federazione Italiana di Organismi di Certificazione dei Sistemi di Gestione Aziendale.
CISQ is the Italian Federation of management system Certification Bodies.



FEDERAZIONE
CISQ

CONTENTS

SELF-PRIMING AND MULTISTAGE CENTRIFUGAL PUMPS

	JET		MULTI INOX
	PAG. 3		PAG. 56
	JET 151-251-200-300		JET - JET INOX - EUROINOX M-P
	PAG. 9		PAG. 59
	JETINOX		AQUAJET
	PAG. 14		PAG. 64
	JETCOM		AQUAJETINOX
	PAG. 20		PAG. 68
	DP		ACTIVE SYSTEM
	PAG. 26		PAG. 72
	GARDENJET		BOOSTER SILENT
	PAG. 29		PAG. 79
	GARDEN INOX		JET - JETINOX - EUROINOX CON ACTIVE DRIVER
	PAG. 33		PAG. 82
	GARDEN COM		E.SYBOX
	PAG. 37		PAG. 86
	EURO		NBB
	PAG. 41		PAG. 90
	EUROINOX		ACTIVE SWITCH
	PAG. 46		PAG. 94
	EUROCOM		AQUAPROF
	PAG. 51		PAG. 97

ACCESSORIES

	PAG. 101
---	----------

TECHNICAL ANNEX

PAG. 105



TECHNICAL DATA

Operating range:

from 0.4 to 10.5 m³/h with head up to 62 metres.

Liquid quality requirements: clean, free from solid or abrasive contaminants, non-viscous, non-aggressive, uncrystallised and chemically neutral, close to the properties of water.

Liquid temperature range:

for domestic use: from 0°C to +35°C (EN 60335-2-41)

for other use: from 0°C to +40°C

Maximum ambient temperature: +40°C

Maximum operating pressure: 8 bar (800 kPa)

Installation: fixed in a horizontal position.

Special executions on request: different frequencies and/or voltage.

Motor protection rating: IP 44

Terminal block protection rating: IP 55

Insulation class: F

Standard input voltage: single phase 220/240 V / 50 Hz
three phase 230/400 V - 50 Hz

APPLICATIONS

Self priming centrifugal pump with excellent suction capacity even in the presence of air bubbles.

Suitable for pumping water with low levels of sandy impurities.

Especially used in domestic water supply installations. Suitable for small farms and gardening, small scale industrial services and where self priming is necessary.

CONSTRUCTIONAL FEATURES OF THE PUMP

Cast-iron motor support and pump body.

Motor support in die cast aluminium.

Impeller, diffuser, venturi tube and sand guard in technopolymer

Stainless steel wear ring.

Carbon/ceramic mechanical seal.

CONSTRUCTIONAL FEATURES OF THE MOTOR

Asynchronous type, closed, with external air cooling.

Rotor mounted on oversized greased-for-life ball bearings, to guarantee low noise and long life.

Incorporated thermo-amperometric protection and permanently inserted capacitor in the single phase version.


It is recommended to use overload protection for three phase motor protection, in compliance with current legislation.

Manufactured pursuant to CEI 2-3 and CEI 61-69 (EN 60335-2-41).


MATERIALS

N°	PARTS *	MATERIALS
1	PUMP BODY	200 UNI ISO 185 CAST IRON
3	FRAME	DIE CAST ALUMINIUM
4	IMPELLER	TECHNOPOLYMER A
7	SHAFT WITH ROTOR	AISI 416 STAINLESS STEEL X12 CrS13 - UNI 6900/71
16	MECHANICAL SEAL	CARBON/CERAMIC
28	OR GASKET	NBR RUBBER
160	VENTURI DIFFUSER NOZZEL GROUP	TECHNOPOLYMER A

* In contact with liquid

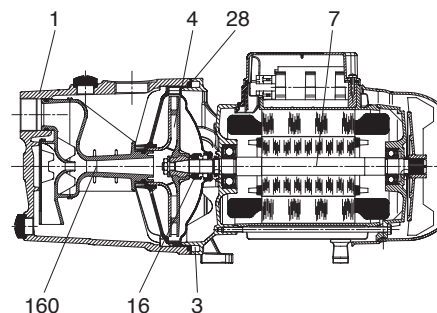


SELF PRIMING CAPACITY

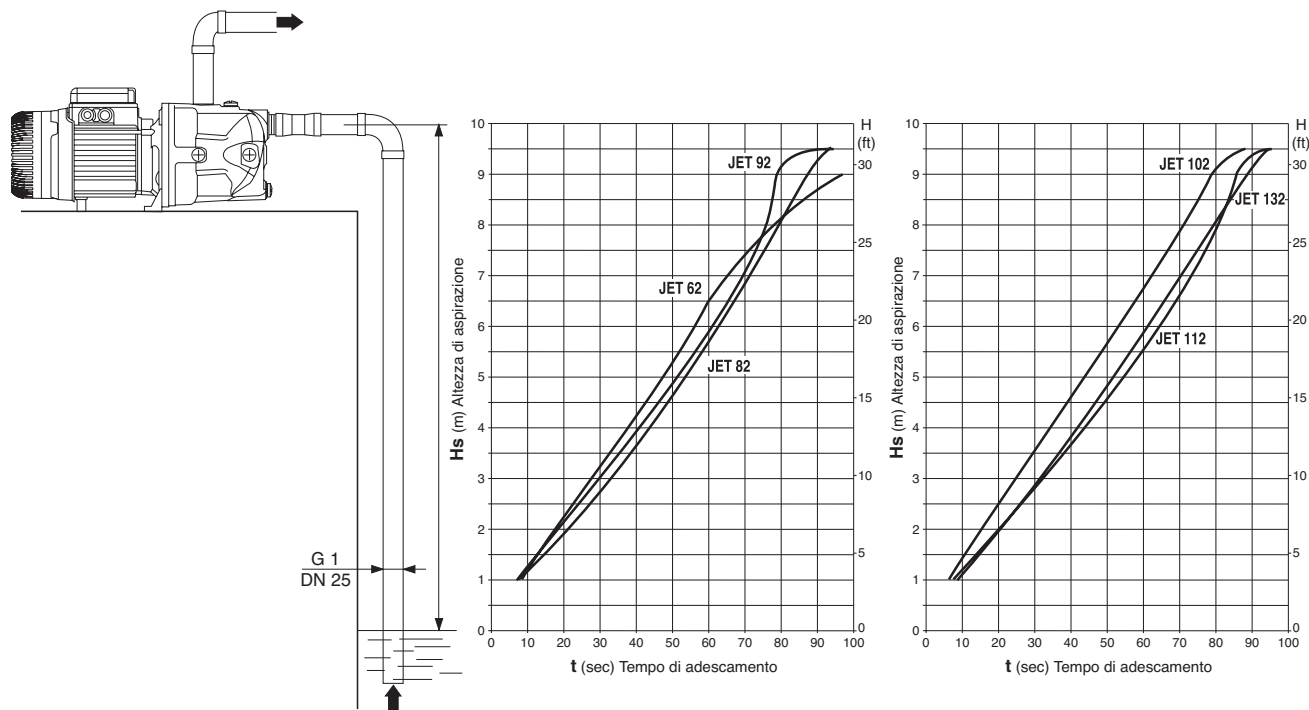

PERFORMANCE RANGE

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

GRAPHIC SELECTION TABLE

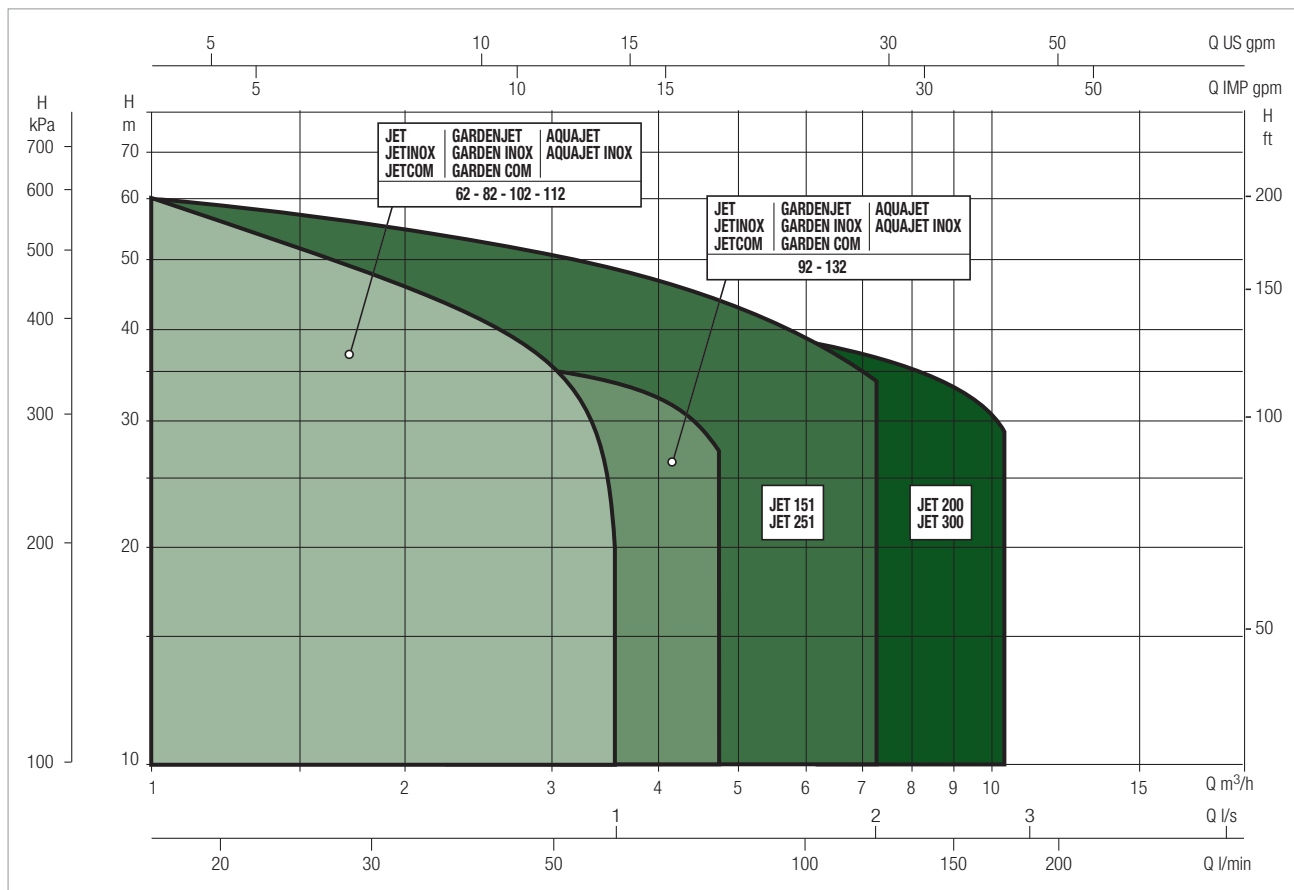


JET SELECTION TABLE


MODEL	Q=m ³ /h	0	0.6	1.2	1.8	2.4	3	3.6	4.2	4.8
	Q=l/min	0	10	20	30	40	50	60	70	80
JET 62 M	H (m)	42	35	29.2	25.6	22.9	21.1			
JET 82 M		47	40	34	30	26.2	23.5	20.3		
JET 82 T		47	40	34	30	26.2	23.5	20.3		
JET 102 M		53.8	47	41	36.3	32.4	28.8	25.8		
JET 102 T		53.8	47	41	36.3	32.4	28.8	25.8		
JET 112 M		61	54	47.8	42.8	38.8	34.8	20		
JET 112 T		61	54	47.8	42.8	38.8	34.8	20		
JET 92 M		36.2	33.5	31	28.4	26	24	21.8	19.6	17
JET 132 M		48.3	45.6	42.8	40	37.6	35	32.5	30	27.2
JET 132 T		48.3	45.6	42.8	40	37.6	35	32.5	30	27.2

JET 62 - SELF-PRIMING CENTRIFUGAL ELECTRIC PUMPS FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from 0 °C to +35 °C - Maximum ambient temperature: +40°C

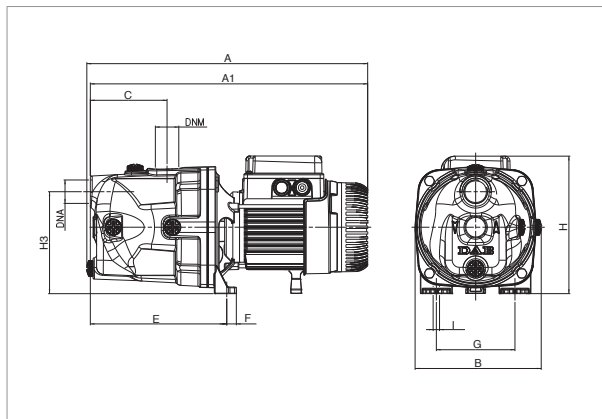

The performance curves are based on the kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

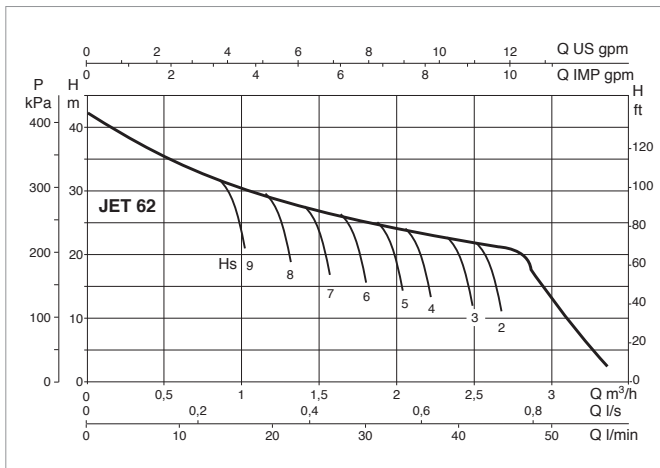


MODEL	ELECTRICAL DATA						
	POWER SUPPLY 50 Hz	P1 MAX kW	P2 NOMINAL		In A	CAPACITOR	
			kW	HP		µF	Vc
JET 62 M	1x220-240 V ~	0.72	0.44	0.6	3.12	12.5	450


MODEL	A	A1	B	C	E	F	G	H	H3	I Ø	DNA GAS	DNM GAS	PACK DIMENSIONS			VOLUME (mc)	GROSS WEIGHT Kg
													L/A	L/B	H		
JET 62	395	390	178	108	192	14	111	193	144	9	1"	1"	470	240	240	0.022	10.5

JET 82 - SELF-PRIMING CENTRIFUGAL ELECTRIC PUMPS FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from 0 °C to +35 °C - Maximum ambient temperature: +40°C

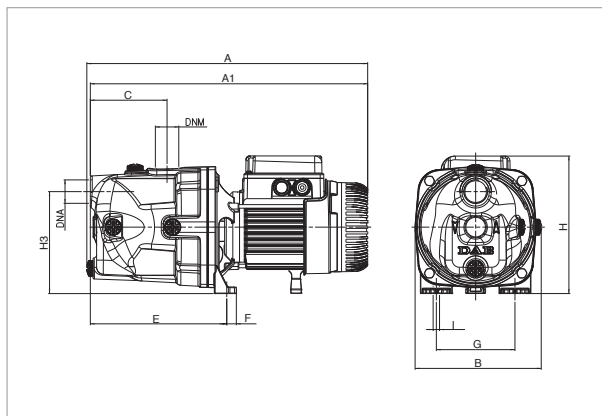

The performance curves are based on the kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

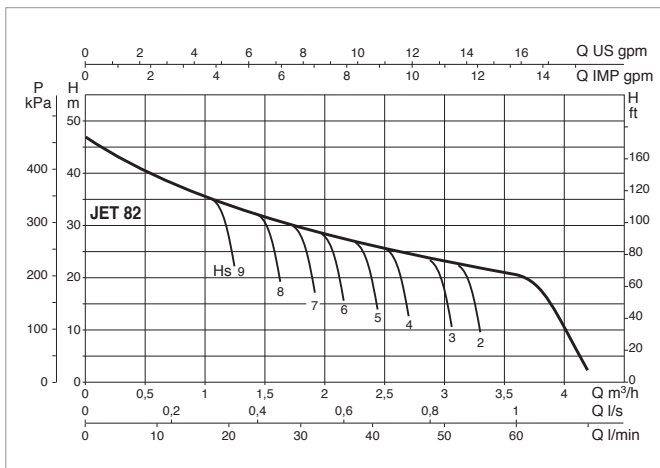


MODEL	ELECTRICAL DATA						
	POWER SUPPLY 50 Hz	P1 MAX kW	P2 NOMINAL		In A	CAPACITOR	
			kW	HP		µF	Vc
JET 82 M	1x220-240 V ~	0.85	0.6	0.8	3.8	12.5	450
JET 82 T	3x230-400 V ~	0.86	0.6	0.8	2.8-1.6	-	-


MODEL	A	A1	B	C	E	F	G	H	H3	I Ø	DNA GAS	DNM GAS	PACK DIMENSIONS			VOLUME (mc)	GROSS WEIGHT Kg
													L/A	L/B	H		
JET 82	395	395	178	108	192	14	111	193	144	9	1"	1"	470	240	240	0.022	10.7

JET 102 - SELF-PRIMING CENTRIFUGAL ELECTRIC PUMPS FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from 0 °C to +35 °C - Maximum ambient temperature: +40°C

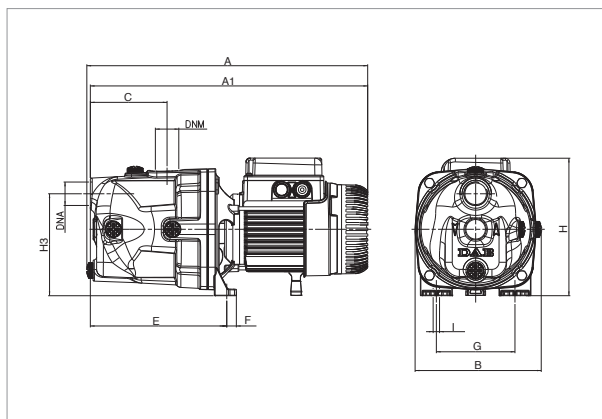

The performance curves are based on the kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

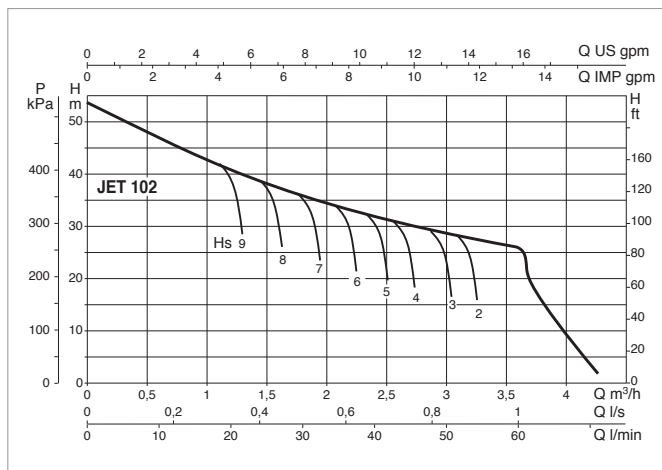


MODEL	ELECTRICAL DATA						
	POWER SUPPLY 50 Hz	P1 MAX kW	P2 NOMINAL		In A	CAPACITOR	
			kW	HP		μF	Vc
JET 102 M	1x220-240 V ~	1.13	0.75	1	5.1	16	450
JET 102 T	3x230-400 V ~	1.04	0.75	1	3.3-1.9	-	-


MODEL	A	A1	B	C	E	F	G	H	H3	I Ø	DNA GAS	DNA GAS	PACK DIMENSIONS			VOLUME (mc)	GROSS WEIGHT Kg
													L/A	L/B	H		
JET 102	414	409	178	108	197	14	111	203	144	9	1"	1"	470	240	240	0.022	12.5

JET 112 - SELF-PRIMING CENTRIFUGAL ELECTRIC PUMPS FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from 0 °C to +35 °C - Maximum ambient temperature: +40°C

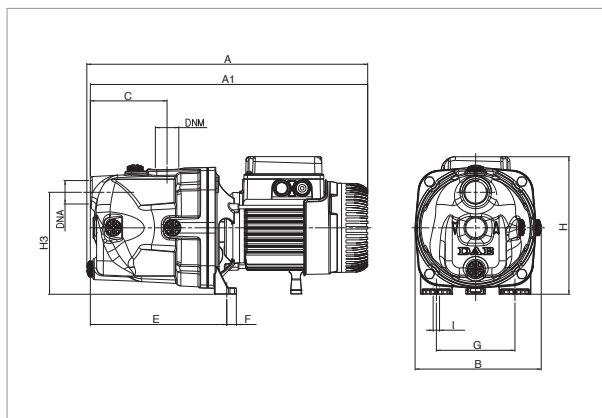

The performance curves are based on the kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

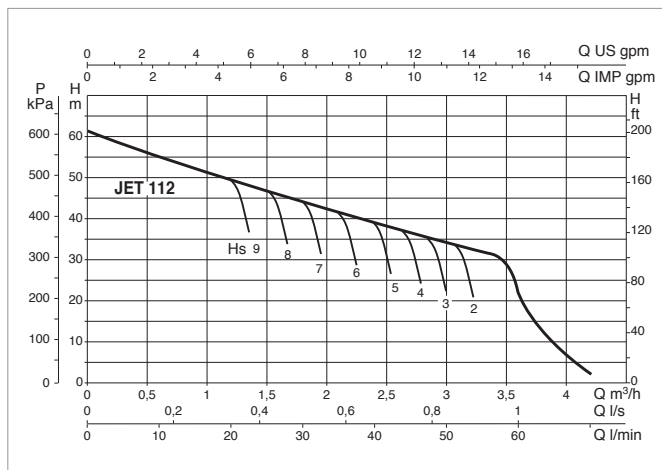


MODEL	ELECTRICAL DATA						
	POWER SUPPLY 50 Hz	P1 MAX kW	P2 NOMINAL		In A	CAPACITOR	
			kW	HP		μF	Vc
JET 112 M	1x220-240 V ~	1.4	1	1.36	6.2	25	450
JET 112 T	3x230-400 V ~	1.35	1	1.36	4.3-2.5	-	-


MODEL	A	A1	B	C	E	F	G	H	H3	I Ø	DNA GAS	DNM GAS	PACK DIMENSIONS			VOLUME (mc)	GROSS WEIGHT Kg
													L/A	L/B	H		
JET 112 M	414	409	178	108	192	14	111	203	144	9	1"	1"	470	240	240	0.022	13.5
JET 112 T	430	409	178	108	192	14	111	203	144	9	1"	1"	470	240	240	0.022	15.1

JET 92 - SELF-PRIMING CENTRIFUGAL ELECTRIC PUMPS FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from 0 °C to +35 °C - Maximum ambient temperature: +40°C

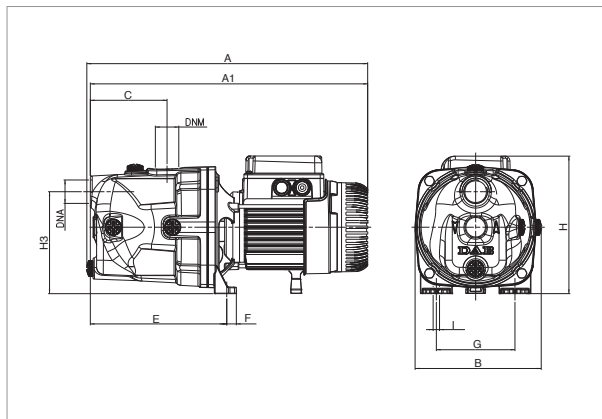

The performance curves are based on the kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

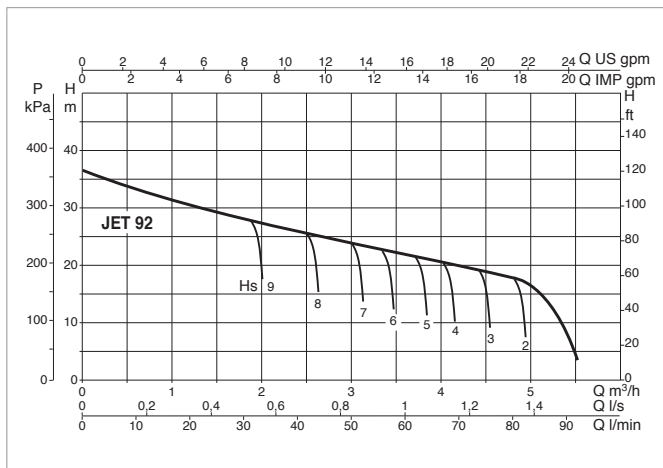


MODEL	ELECTRICAL DATA						
	POWER SUPPLY 50 Hz	P1 MAX kW	P2 NOMINAL		In A	CAPACITOR	
			kW	HP		µF	Vc
JET 92 M	1x220-240 V ~	0.94	0.75	1	4.2	14	450


MODEL	A	A1	B	C	E	F	G	H	H3	I Ø	DNA GAS	DNM GAS	PACK DIMENSIONS			VOLUME (mc)	GROSS WEIGHT Kg
													L/A	L/B	H		
JET 92	395	390	178	108	192	14	111	193	144	9	1"	1"	470	240	240	0.022	11.7

JET 132 - SELF-PRIMING CENTRIFUGAL ELECTRIC PUMPS FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from 0 °C to +35 °C - Maximum ambient temperature: +40°C

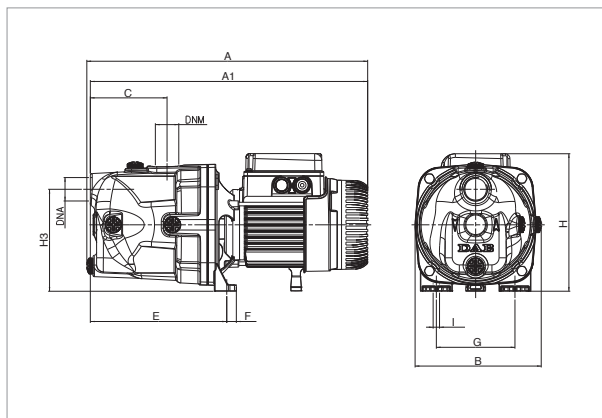

The performance curves are based on the kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

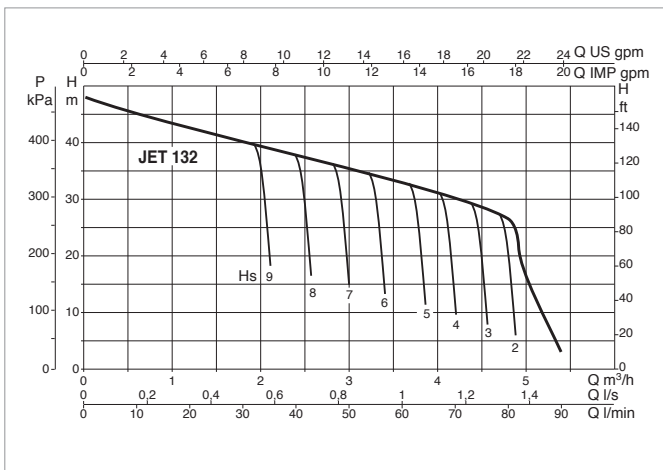

MODEL	ELECTRICAL DATA						
	POWER SUPPLY 50 Hz	P1 MAX kW	P2 NOMINAL		In A	CAPACITOR	
			kW	HP		µF	Vc
JET 132 M	1x220-240 V ~	1.49	1	1.36	6.6	25	450
JET 132 T	3x230-400 V ~	1.43	1	1.36	4.7-2.7	-	--

MODEL	A	A1	B	C	E	F	G	H	H3	I Ø	DNA GAS	DNM GAS	PACK DIMENSIONS			VOLUME (mc)	GROSS WEIGHT Kg
													L/A	L/B	H		
JET 132 M	414	409	263	108	192	14	111	203	144	9	1"	1"	470	240	240	0.022	13.5
JET 132 T	430	409	263	108	192	14	111	203	144	9	1"	1"	470	240	240	0.022	15.1

JET 151-251-200-300

SELF-PRIMING CENTRIFUGAL ELECTRIC PUMPS



JET 151-251



JET 200-300

TECHNICAL DATA

Operating range:

from 0.4 to 10.5 m³/h with head up to 62 metres.

Liquid quality requirements: clean, free from solid or abrasive contaminants, non-viscous, non-aggressive, uncrystallised and chemically neutral, close to the properties of water.

Liquid temperature range:

for domestic use: from 0°C to +35°C (EN 60335-2-41)

for other use: from 0°C to +40°C

Maximum ambient temperature: +40°C

Maximum operating pressure: 8 bar (800 kPa)

Installation: fixed in a horizontal position.

Special executions on request: different frequencies and/or voltage.

Motor protection rating: IP 44

Terminal block protection rating: IP 55

Insulation class: F

Standard input voltage: single phase 220/240 V / 50 Hz
three phase 230/400 V - 50 Hz

APPLICATIONS

Self priming centrifugal pump with excellent suction capacity even in the presence of air bubbles.

Suitable for pumping water with low levels of sandy impurities.

Especially used in domestic water supply installations.

Suitable for small farms and gardening, small scale industrial services and where self priming is necessary.

CONSTRUCTIONAL FEATURES OF THE PUMP

Cast-iron motor support and pump body.

Impeller, diffuser, venturi tube and sand guard in technopolymer

Twin impeller on the JET 151 and 251 versions.

Stainless steel wear ring.

Carbon/ceramic mechanical seal.

CONSTRUCTIONAL FEATURES OF THE MOTOR

Asynchronous type, closed, with external air cooling.

Rotor mounted on oversized greased-for-life ball bearings, to guarantee low noise and long life.

Incorporated thermo-amperometric protection and permanently inserted capacitor in the single phase version.

It is recommended to use overload protection for three phase motor protection, in compliance with current legislation.

Manufactured pursuant to CEI 2-3 and CEI 61-69 (EN 60335-2-41).


JET 151-251-200-300

SELF-PRIMING CENTRIFUGAL ELECTRIC PUMPS

MATERIALS

N°	PARTS*	MATERIALS
1	PUMP BODY	GJL 200 UNI EN 1561 CAST IRON
3	FRAME	GJL 200 UNI EN 1561 CAST IRON
4	IMPELLER	PPO-GF 20 (Noryl™)
7	SHAFT WITH ROTOR	AISI 303 STAINLESS STEEL X8CrNiS18-9 UNI EN 10088 (UNI 6900: 71)
8-9	VENTURI DIFFUSER NOZZLE GROUP	PPO-GF 20 (Noryl™)
16	MECHANICAL SEAL	CARBON/CERAMIC
28	OR GASKET	NBR RUBBER


* In contact with liquid

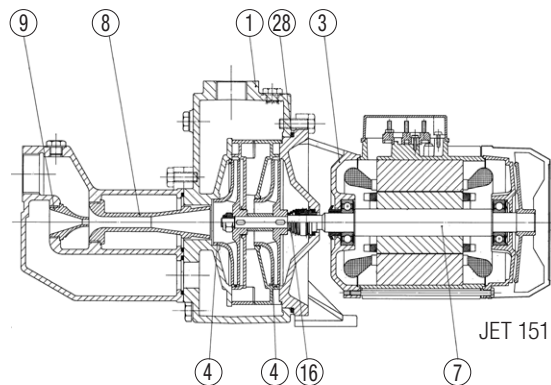

MATERIALS

N°	PARTS*	MATERIALS
1	PUMP BODY	GJL 200 UNI EN 1561 CAST IRON
3	FRAME	GJL 200 UNI EN 1561 CAST IRON
4	IMPELLER	PPO-GF 20 (Noryl™)
7	SHAFT WITH ROTOR	AISI 303 STAINLESS STEEL X8CrNiS18-9 UNI EN 10088 (UNI 6900: 71)
8-9	VENTURI DIFFUSER NOZZLE GROUP	PPO-GF 20 (Noryl™)
16	MECHANICAL SEAL	CARBON/CERAMIC
28	OR GASKET	NBR RUBBER

* In contact with liquid

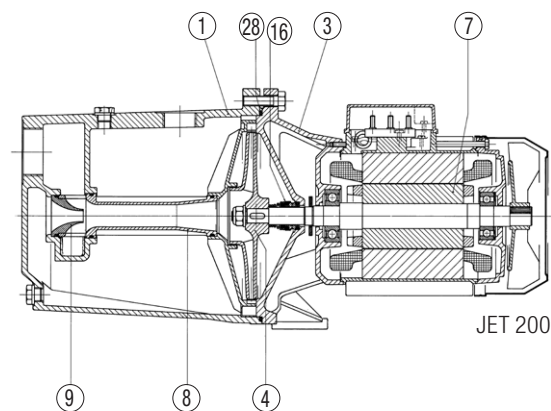


JET 151-251-200-300

SELF-PRIMING CENTRIFUGAL ELECTRIC PUMPS

PERFORMANCE RANGE

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

GRAPHIC SELECTION TABLE

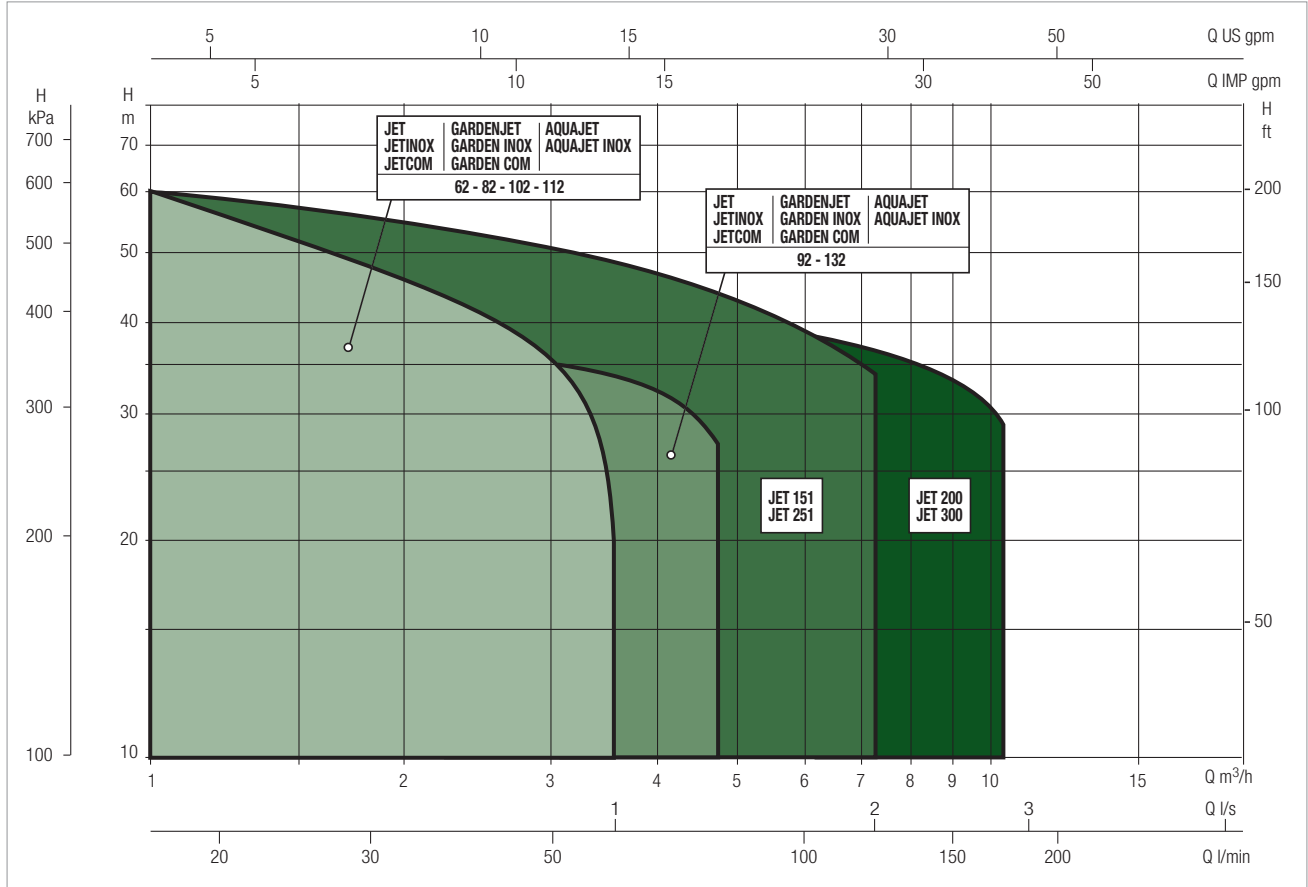


SELECTION TABLE - JET 151-251-200-300


MODEL	Q=m ³ /h	0	0.6	1.2	1.8	2.4	3.0	3.6	4.2	4.8	6	7.2	9	9.6	10.5
	Q=l/min	0	10	20	30	40	50	60	70	80	100	120	150	160	175
JET 151 M	H (m)	61	58.2	56	53	50	46	43	36						
JET 151 T		61	58.2	56	53	50	46	43	36						
JET 251 M		62	60	58	56	54	51	48.5	46	43.5	39	34.2			
JET 251 T		62	60	58	56	54	51	48.5	46	43.5	39	34.2			
JET 200 M		41			37.5	36.5	35.2	34	33	31.8	29.5	27.2	24	22.8	21.3
JET 200 T		41			37.5	36.5	35.2	34	33	31.8	29.5	27.2	24	22.8	21.3
JET 300 M		51			48	47	46	44.5	43	42	40	37	33	32	29
JET 300 T		51			48	47	46	44.5	43	42	40	37	33	32	29

JET 151 - SELF-PRIMING CENTRIFUGAL ELECTRIC PUMPS FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from 0 °C to +35 °C - Maximum ambient temperature: +40°C

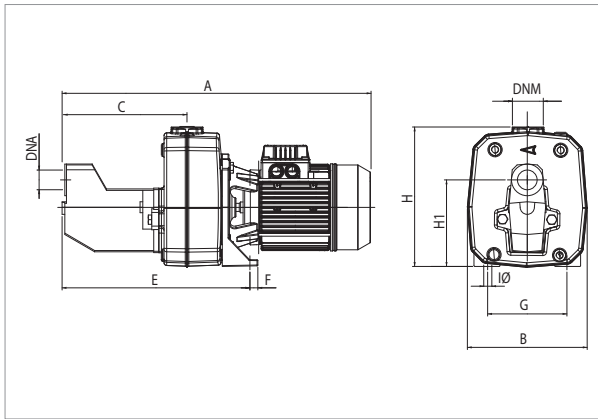

The performance curves are based on the kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

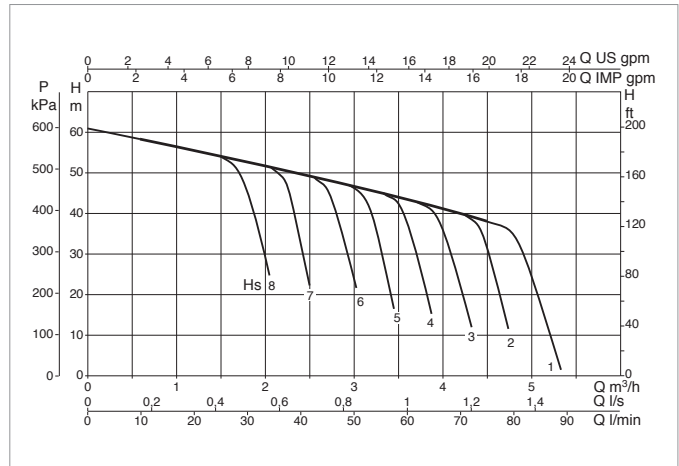


MODEL	ELECTRICAL DATA						
	POWER SUPPLY 50 Hz	P1 MAX kW	P2 NOMINAL		In A	CAPACITOR	
			kW	HP		µF	Vc
JET 151 M	1x220-240 V ~	1.6	1.1	1.5	7.2	31.5	450
JET 151 T	3x230-400 V ~	1.6	1.1	1.5	5.2-3	-	-


MODEL	A	B	C	E	F	G	I Ø	H	H1	DNA GAS	DNM GAS	PACK DIMENSIONS			VOLUME (mc)	GROSS WEIGHT Kg
												L/A	L/B	H		
JET 151	558	210	221	350	20	145	11	255	158	1 1/4"	1"	612	248	279	0.042	31

JET 251 - SELF-PRIMING CENTRIFUGAL ELECTRIC PUMPS FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from 0 °C to +35 °C - Maximum ambient temperature: +40°C

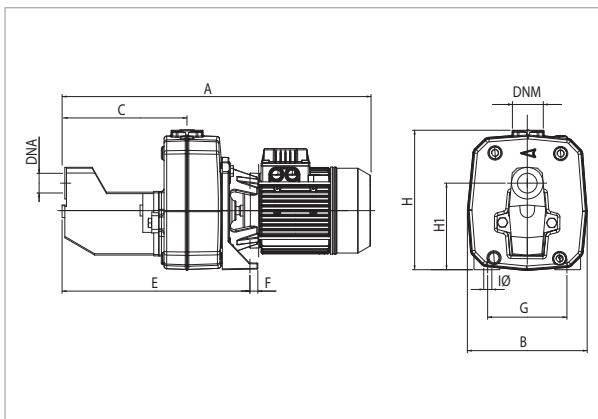

The performance curves are based on the kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

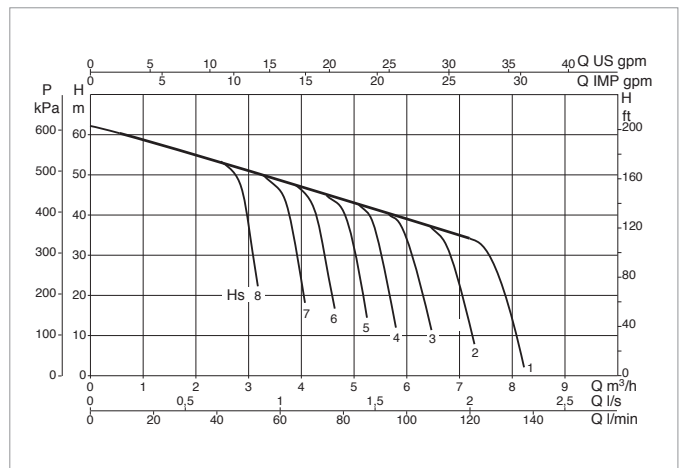


MODEL	ELECTRICAL DATA						
	POWER SUPPLY 50 Hz	P1 MAX kW	P2 NOMINAL		In A	CAPACITOR	
			kW	HP		µF	Vc
JET 251 M	1x220-240 V ~	2	1.85	2.5	10	40	450
JET 251 T	3x230-400 V ~	2	1.85	2.5	6.9-4	-	-


MODEL	A	B	C	E	F	G	I Ø	H	H1	DNA GAS	DNM GAS	PACK DIMENSIONS			VOLUME (mc)	GROSS WEIGHT Kg
												L/A	L/B	H		
JET 251 M	632	210	221	350	20	145	11	255	158	1 1/4" G	1" G	657	248	279	0.045	35
JET 251 T	558	210	221	350	20	145	11	255	158	1 1/4" G	1" G	612	248	279	0.042	31

JET 200 - SELF-PRIMING CENTRIFUGAL ELECTRIC PUMPS FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from 0 °C to +35 °C - Maximum ambient temperature: +40°C

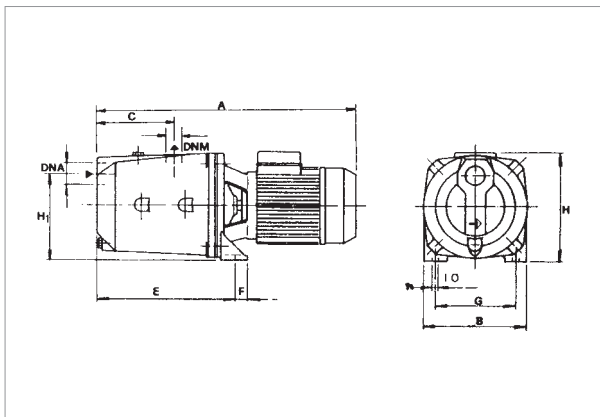

The performance curves are based on the kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

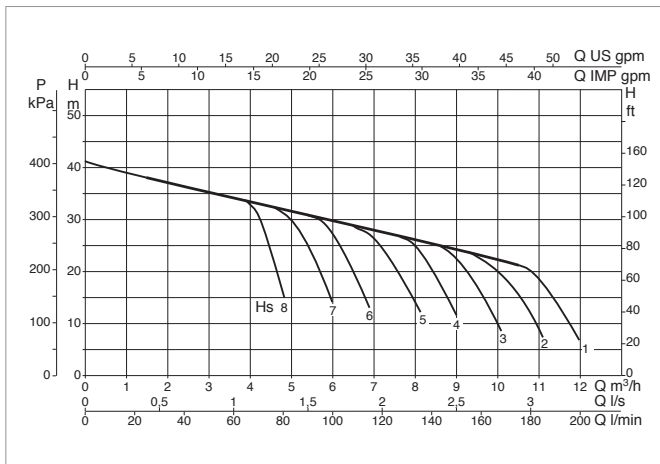


MODEL	ELECTRICAL DATA						
	POWER SUPPLY 50 Hz	P1 MAX kW	P2 NOMINAL		In A	CAPACITOR	
			kW	HP		µF	Vc
JET 200 M	1x220-240 V ~	2.0	1.5	2	9	31.5	450
JET 200 T	3x230-400 V ~	2.0	1.5	2	6.8-3.9	-	-


MODEL	A	B	C	E	F	G	I Ø	H	H1	DNA GAS	DNM GAS	PACK DIMENSIONS			VOLUME (mc)	GROSS WEIGHT Kg
												L/A	L/B	H		
JET 200	521	214	151	282	20	160	11	227	175	1 1/2"	1 1/4"	612	248	279	0.042	27

JET 300 - SELF-PRIMING CENTRIFUGAL ELECTRIC PUMPS FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from 0 °C to +35 °C - Maximum ambient temperature: +40°C

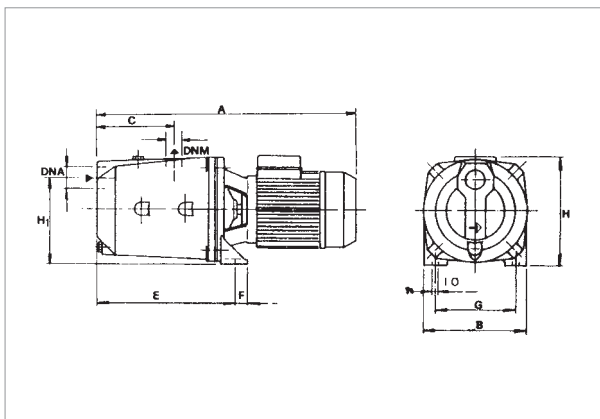

The performance curves are based on the kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

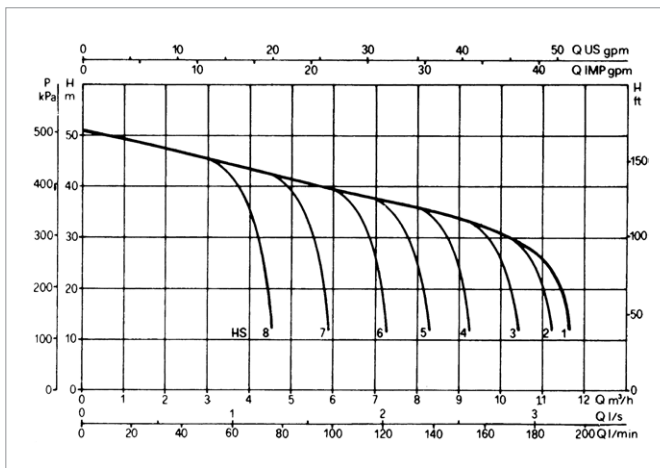

MODEL	ELECTRICAL DATA						
	POWER SUPPLY 50 Hz	P1 MAX kW	P2 NOMINAL		In A	CAPACITOR	
			kW	HP		µF	Vc
JET 300 M	1x220-240 V ~	2.7	2.2	3	12	40	450
JET 300 T	3x230-400 V ~	2.7	2.2	3	8.5-4.9	-	-

MODEL	A	B	C	E	F	G	I Ø	H	H1	DNA GAS	DNM GAS	PACK DIMENSIONS			VOLUME (mc)	GROSS WEIGHT Kg
												L/A	L/B	H		
JET 300 M	521	214	151	282	20	160	11	235	175	1 1/2"	1 1/4"	612	248	279	0.045	31.5
JET 300 T	595	214	151	282	20	160	11	227	175	1 1/2"	1 1/4"	657	248	279	0.042	30

**TECHNICAL DATA****Operating range:**

from 0.4 to 10.5 m³/h with head up to 62 metres.

Liquid quality requirements: clean, free from solid or abrasive contaminants, non-viscous, non-aggressive, uncrystallised and chemically neutral.

Liquid temperature range:

for domestic use: from 0°C to +35°C (EN 60335-2-41)

for other use: from 0°C to +40°C

Maximum suction depth: 8 metres.

Maximum ambient temperature: +50°C

Maximum operating pressure: 8 bar (800 kPa)

Installation: fixed in a horizontal position.

Special executions on request: alternative voltages and/or frequencies.

Motor protection rating: IP 44

Terminal block protection rating: IP 55

Insulation class: F

Standard input voltage: single phase 220-240 V / 50 Hz
three phase 230-400 V / 50 Hz

APPLICATIONS

Self priming centrifugal pump with excellent suction capacity even in the presence of air bubbles.

Suitable for pumping water with low levels of sandy impurities.

Especially used in domestic water supply installations.

Suitable for small farms and gardening, small scale industrial services and where self priming is necessary.

CONSTRUCTIONAL FEATURES OF THE PUMP

Pump body, seal holder cover and wear ring in stainless steel.

Motor support in die cast aluminium.

Impeller, diffuser, venturi tube in technopolymer.

Carbon/ceramic mechanical seal.

CONSTRUCTIONAL FEATURES OF THE MOTOR

Asynchronous type, closed, with external air cooling.

Rotor mounted on oversized greased-for-life ball bearings, to guarantee low noise and long life.

Incorporated thermo-amperometric protection and permanently inserted capacitor in the single phase version.


It is recommended to use overload protection for three phase motor protection, in compliance with current legislation.

Manufacture pursuant to CEI 2-3 and CEI 61-69 (EN 60335-2-41) standard.




MATERIALS

N°	PARTS *	MATERIALS
1	PUMP BODY	AISI 304 STAINLESS STEEL X5 CRNi 1810 - UNI 6900/71
4	IMPELLER	TECHNOPOLYMER A
7	SHAFT WITH ROTOR	AISI 416 STAINLESS STEEL X12 CrS13 - UNI 6900/71
16	MECHANICAL SEAL	CARBON/CERAMIC
28	OR GASKET	NBR RUBBER
36	SEAL HOLDER COVER	AISI 304 STAINLESS STEEL X5 CRNi 1810 - UNI 6900/71
160	VENTURI DIFFUSER NOZZEL GROUP	TECHNOPOLYMER A

* In contact with liquid

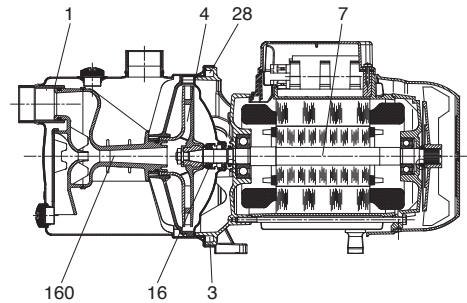


SELF PRIMING CAPACITY

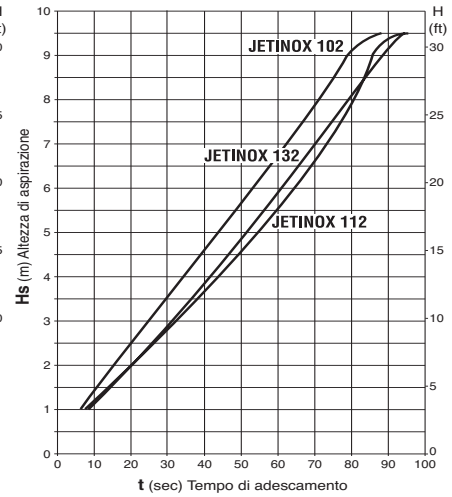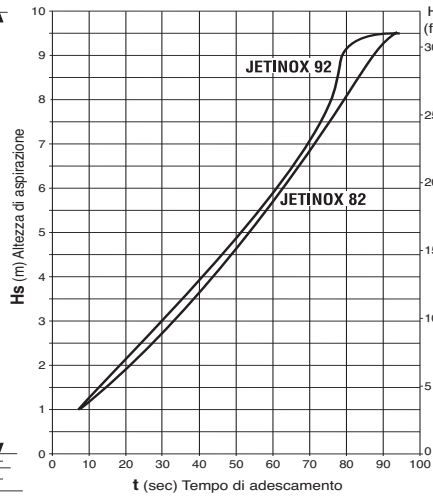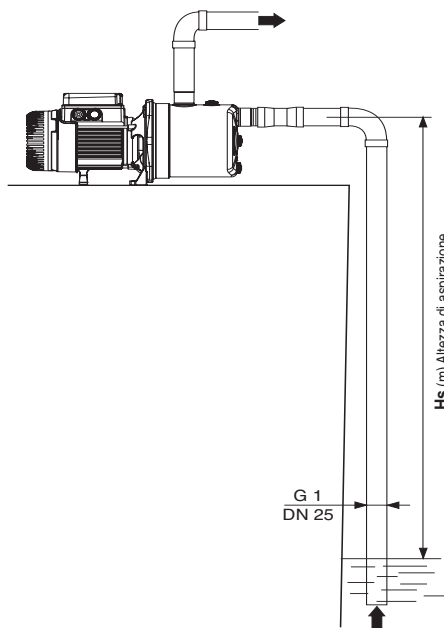

PERFORMANCE RANGE

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

GRAPHIC SELECTION TABLE

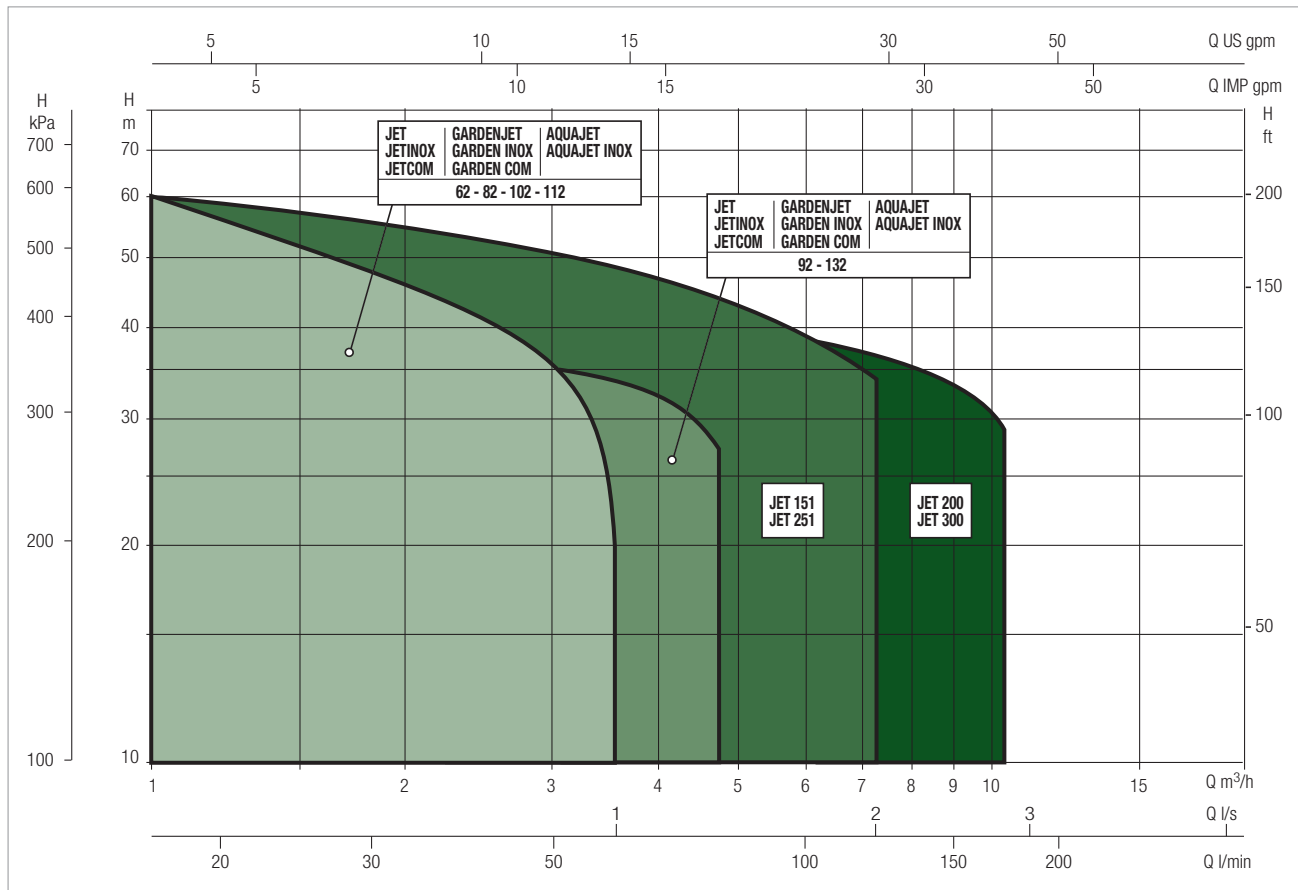


JETINOX SELECTION TABLE


MODEL	Q=m ³ /h	0	0.6	1.2	1.8	2.4	3.0	3.6	4.2	4.8
	Q=l/min	0	10	20	30	40	50	60	70	80
JETINOX 82 M	H (m)	47	40	34	30	26.2	23.5	20.3		
JETINOX 82 T		47	40	34	30	26.2	23.5	20.3		
JETINOX 102 M		53.8	47	41	36.3	32.4	28.8	25.8		
JETINOX 102 T		53.8	47	41	36.3	32.4	28.8	25.8		
JETINOX 112 M		61	54	47.8	42.8	38.8	34.8	20		
JETINOX 112 T		61	54	47.8	42.8	38.8	34.8	20		
JETINOX 92 M		36.2	33.5	31	28.4	26	24	21.8	19.6	17.5
JETINOX 132 M		48.3	45.6	42.8	40	37.6	35	32.5	30	27.2
JETINOX 132 T		48.3	45.6	42.8	40	37.6	35	32.5	30	27.2

JET 82 - SELF-PRIMING CENTRIFUGAL ELECTRIC PUMPS FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from 0 °C to +35 °C - Maximum ambient temperature: +50°C

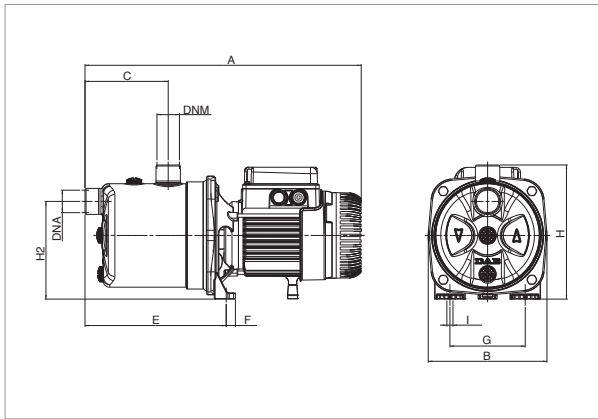

The performance curves are based on the kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

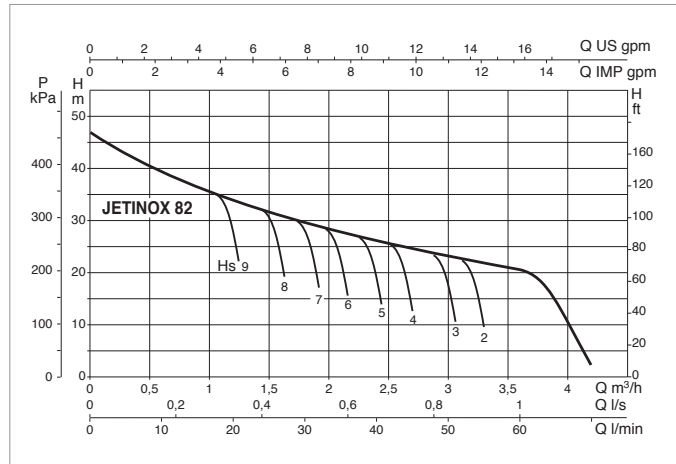


MODEL	ELECTRICAL DATA						
	POWER SUPPLY 50 Hz	P1 MAX kW	P2 NOMINAL		In A	CAPACITOR	
			kW	HP		µF	Vc
JETINOX 82 M	1x220-240 V ~	0.85	0.6	0.8	3.8	12.5	450
JETINOX 82 T	3x230-400 V ~	0.86	0.6	0.8	2.8-1.6	-	-


MODEL	A	B	C	E	F	G	H	H1	H2	I Ø	L	DNG GAS	DNM GAS	PACK DIMENSIONS			VOLUME (mc)	GROSS WEIGHT Kg
														L/A	L/B	H		
JETINOX 82	406	174	122	207	14	111	197	-	144	9	-	1"	1"	470	240	240	0.027	7.8

JET 102 - SELF-PRIMING CENTRIFUGAL ELECTRIC PUMPS FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from 0 °C to +35 °C - Maximum ambient temperature: +50°C

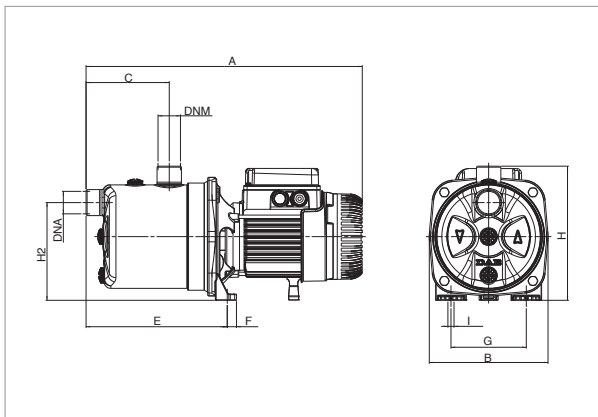

The performance curves are based on the kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

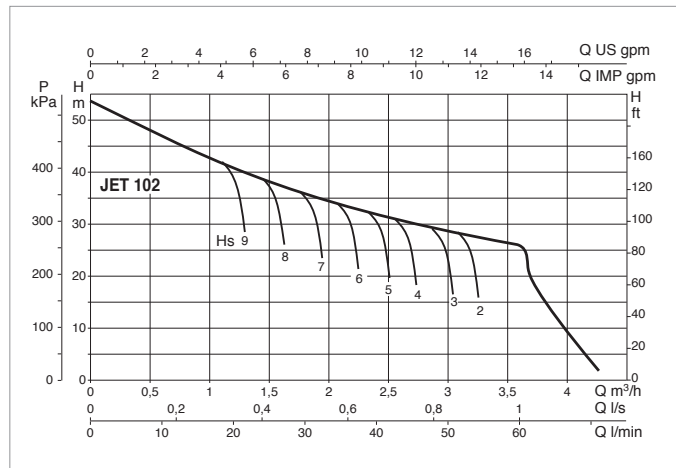


MODEL	ELECTRICAL DATA						
	POWER SUPPLY 50 Hz	P1 MAX kW	P2 NOMINAL		In A	CAPACITOR	
			kW	HP		µF	Vc
JETINOX 102 M	1x220-240 V ~	1.13	0.75	1	5.1	16	450
JETINOX 102 T	3x230-400 V ~	1.04	0.75	1	3.3-1.9	-	-


MODEL	A	B	C	E	F	G	H	H1	H2	I Ø	L	DNG GAS	DNM GAS	PACK DIMENSIONS			VOLUME (mc)	GROSS WEIGHT Kg
														L/A	L/B	H		
JETINOX 102	424	174	122	207	14	111	197	-	144	9	-	1"	1"	470	240	240	0.027	9.6

JET 112 - SELF-PRIMING CENTRIFUGAL ELECTRIC PUMPS FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from 0 °C to +35 °C - Maximum ambient temperature: +50°C

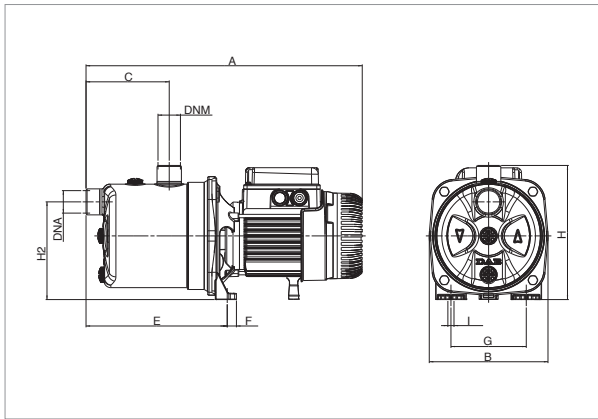

The performance curves are based on the kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

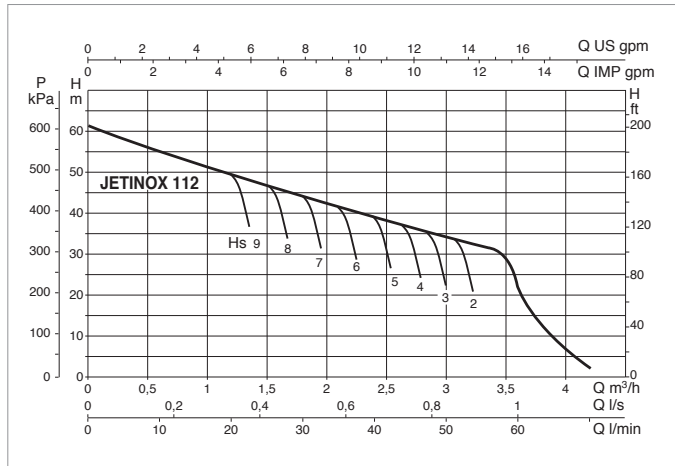


MODEL	ELECTRICAL DATA						
	POWER SUPPLY 50 Hz	P1 MAX kW	P2 NOMINAL		In A	CAPACITOR	
			kW	HP		µF	Vc
JETINOX 112 M	1x220-240 V ~	1.4	1	1.36	6.2	25	450
JETINOX 112 T	3x230-400 V ~	1.35	1	1.36	4.3-2.5	-	-


MODEL	A	B	C	E	F	G	H	H1	H2	I Ø	L	DNA GAS	DNM GAS	PACK DIMENSIONS			VOLUME (mc)	GROSS WEIGHT Kg
														L/A	L/B	H		
JETINOX 112 M	424	174	122	207	14	111	197	-	144	9	-	1"	1"	470	240	240	0.027	10.6
JETINOX 112 T	440	174	122	207	14	111	197	-	144	9	-	1"	1"	470	240	240	0.027	11.7

JET 92 - SELF-PRIMING CENTRIFUGAL ELECTRIC PUMPS FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from 0 °C to +35 °C - Maximum ambient temperature: +50°C

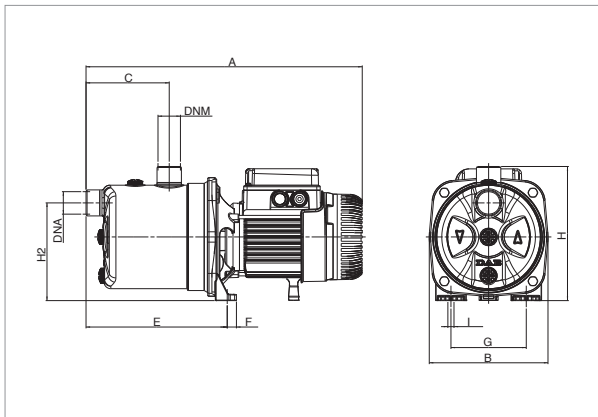

The performance curves are based on the kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

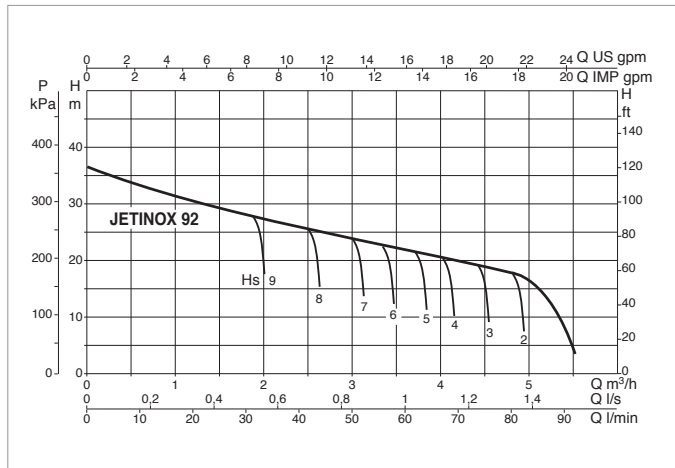


MODEL	ELECTRICAL DATA						
	POWER SUPPLY 50 Hz	P1 MAX kW	P2 NOMINAL		In A	CAPACITOR	
			kW	HP		µF	Vc
JETINOX 92 M	1x220-240 V ~	0.94	0.75	1	4.2	14	450


MODEL	A	B	C	E	F	G	H	H1	H2	I Ø	L	DNA GAS	DNM GAS	PACK DIMENSIONS			VOLUME (mc)	GROSS WEIGHT Kg
														L/A	L/B	H		
JETINOX 92	406	174	122	207	14	111	197	-	144	9	-	1"	1"	470	240	240	0.027	8.8

JET 132 - SELF-PRIMING CENTRIFUGAL ELECTRIC PUMPS FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from 0 °C to +35 °C - Maximum ambient temperature: +50°C

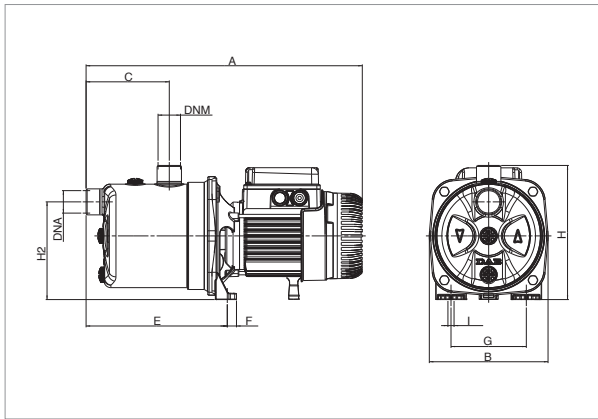

The performance curves are based on the kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

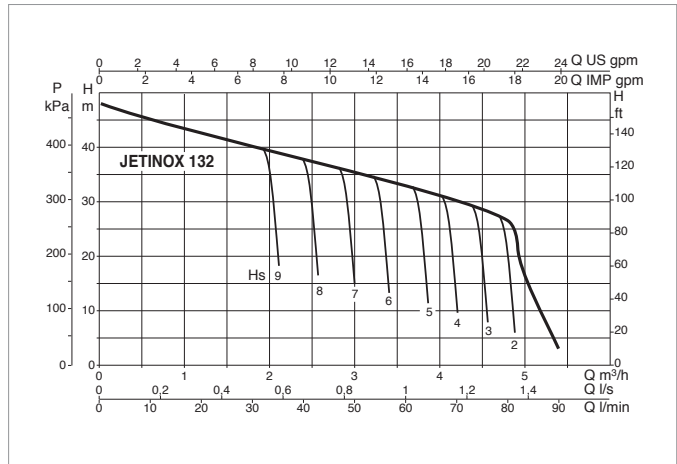

MODEL	ELECTRICAL DATA						
	POWER SUPPLY 50 Hz	P1 MAX kW	P2 NOMINAL		In A	CAPACITOR	
			kW	HP		µF	Vc
JETINOX 132 M	1x220-240 V ~	1.49	1	1.36	6.6	25	450
JETINOX 132 T	3x230-400 V ~	1.43	1	1.36	4.7-2.7	-	-

MODEL	A	B	C	E	F	G	H	H1	H2	I Ø	L	DNA GAS	DNM GAS	PACK DIMENSIONS			VOLUME (mc)	GROSS WEIGHT Kg
														L/A	L/B	H		
JETINOX 132 M	424	174	122	207	14	111	197	-	144	9	-	1"	1"	470	240	240	0.027	10.6
JETINOX 132 T	440	174	122	207	14	111	197	-	144	9	-	1"	1"	470	240	240	0.027	12.6

**TECHNICAL DATA****Operating range:**

from 0.6 to 5.4 m³/h with head up to 54 metres.

Liquid quality requirements: clean, free from solid or abrasive contaminants, non-viscous, non-aggressive, uncrystallised and chemically neutral.

Liquid temperature range: from 0°C to +35°C for domestic use (EN 60335-2-41).

Maximum ambient temperature: +40°C

Maximum operating pressure: 6 bar (600 kPa)

Maximum suction depth: 8 metres.

Installation: fixed in a horizontal position.

Special executions on request: alternative voltages and/or frequencies.

Motor protection rating: IP 44

Terminal block protection rating: IP 55

Insulation class: F

Standard input voltage: single phase 220/240 V / 50 Hz
three phase 230/400 V - 50 Hz

APPLICATIONS

Self priming centrifugal pump with excellent suction capacity even in the presence of air bubbles.

Suitable for pumping water with low levels of sandy impurities.

Especially used in domestic water supply installations. Suitable for small farms and gardening, small scale industrial services and where self priming is necessary.

CONSTRUCTIONAL FEATURES OF THE PUMP

Pump body in technopolymer and motor support in die cast aluminium.

Impeller, diffuser, venturi tube and sand guard in technopolymer

Stainless steel wear ring.

Carbon/ceramic mechanical seal.

CONSTRUCTIONAL FEATURES OF THE MOTOR

Asynchronous type, closed, with external air cooling.

Rotor mounted on oversized greased-for-life ball bearings, to guarantee low noise and long life.

Incorporated thermo-amperometric protection and permanently inserted capacitor in the single phase version.


It is recommended to use overload protection for three phase motor protection, in compliance with current legislation.

Manufactured pursuant to CEI 2-3 and CEI 61-69 (EN 60335-2-41).


MATERIALS

N°	PARTS *	MATERIALS
1	PUMP BODY	TECHNOPOLYMER A
4	IMPELLER	TECHNOPOLYMER A
7	SHAFT WITH ROTOR	AISI 416 STAINLESS STEEL X12 CrS13 - UNI 6900/71
16	MECHANICAL SEAL	CARBON/CERAMIC
28	OR GASKET	NBR RUBBER
36	SEAL HOLDER COVER	AISI 304 STAINLESS STEEL X5 CRNi 1810 - UNI 6900/71
160	VENTURI DIFFUSER NOZZEL GROUP	TECHNOPOLYMER A

* In contact with liquid

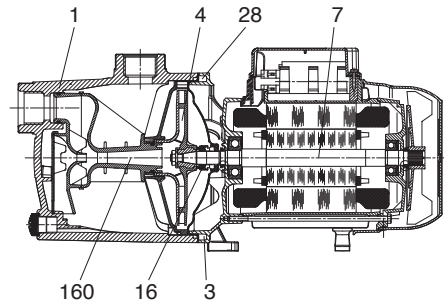


SELF PRIMING CAPACITY

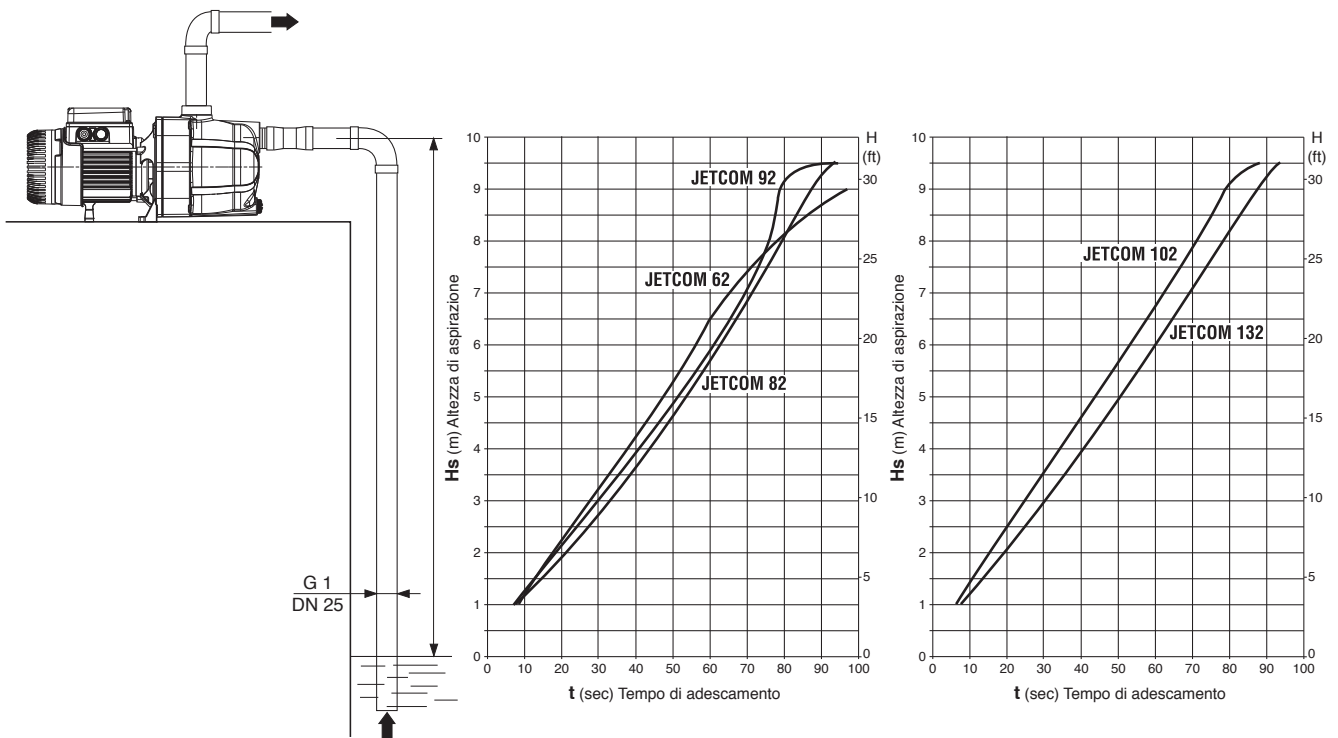

PERFORMANCE RANGE

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

GRAPHIC SELECTION TABLE

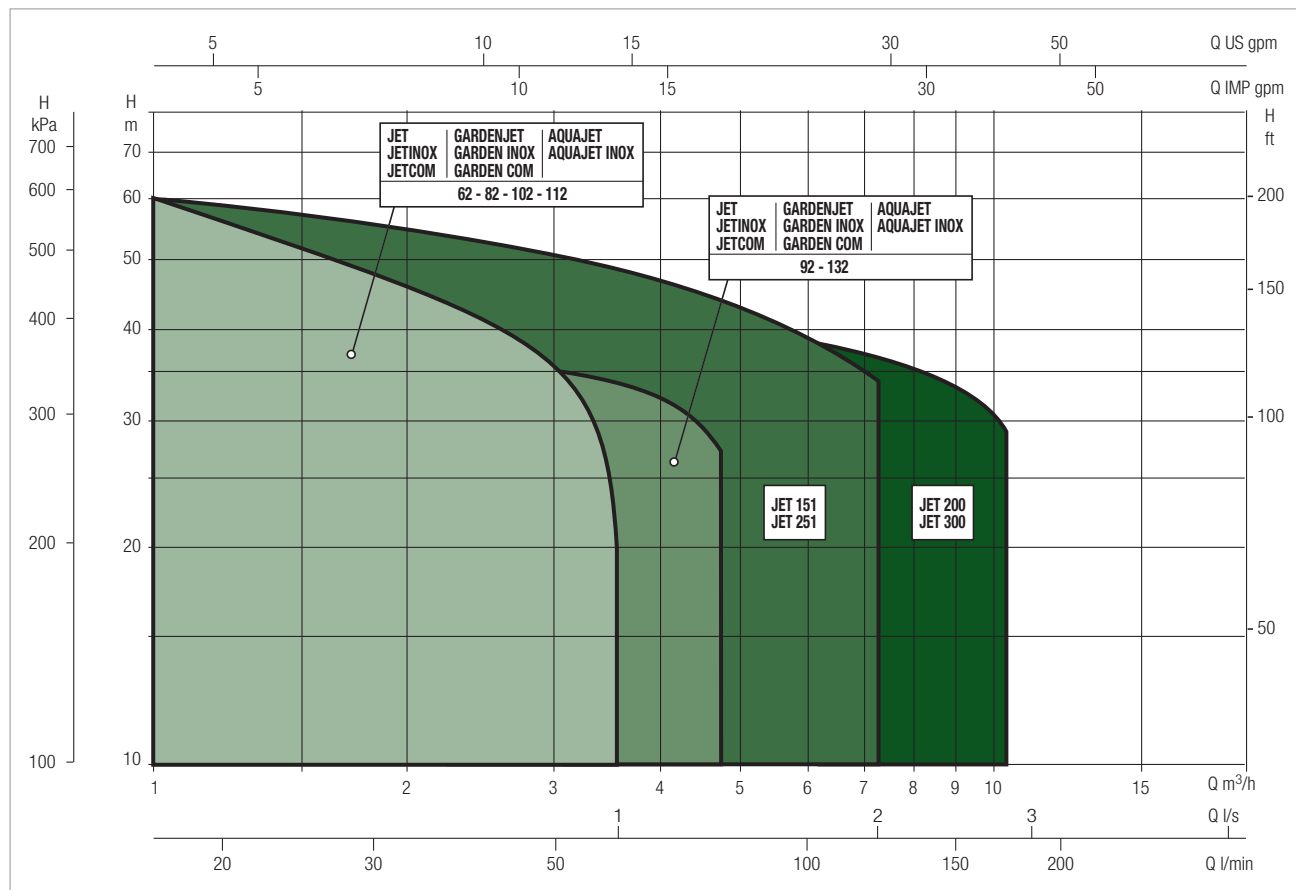


JETCOM SELECTION TABLE


MODEL	Q=m ³ /h	0	0.6	1.2	1.8	2.4	3.0	3.6	4.2	4.8
	Q=l/min	0	10	20	30	40	50	60	70	80
JETCOM 62 M	H (m)	42	35	29.2	25.6	22.9	13			
JETCOM 82 M		47	40	34	30	26.2	23.5	20		
JETCOM 102 M		53.8	47	41	36.3	32.4	28.8	25.8		
JETCOM 102 T		53.8	47	41	36.3	32.4	28.8	25.8		
JETCOM 92 M		36.2	33.5	31	28.4	26	24	21.8	19.6	17.5
JETCOM 132 M		48.3	45.6	42.8	40	37.6	35	32.5	30	27.2
JETCOM 132 T		48.3	45.6	42.8	40	37.6	35	32.5	30	27.2

JETCOM 62-SELF-PRIMING CENTRIFUGAL ELECTRIC PUMPS FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from 0 °C to +35 °C - Maximum ambient temperature: +40°C

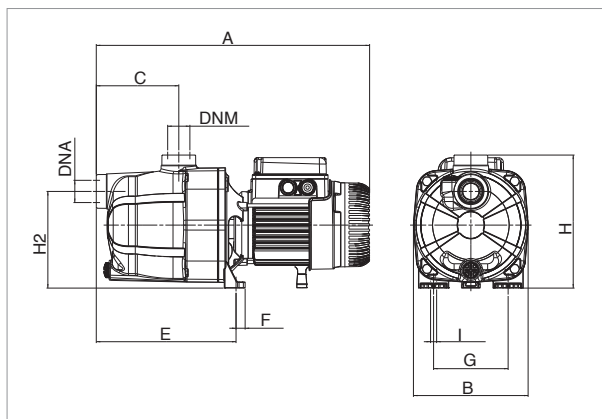

The performance curves are based on the kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

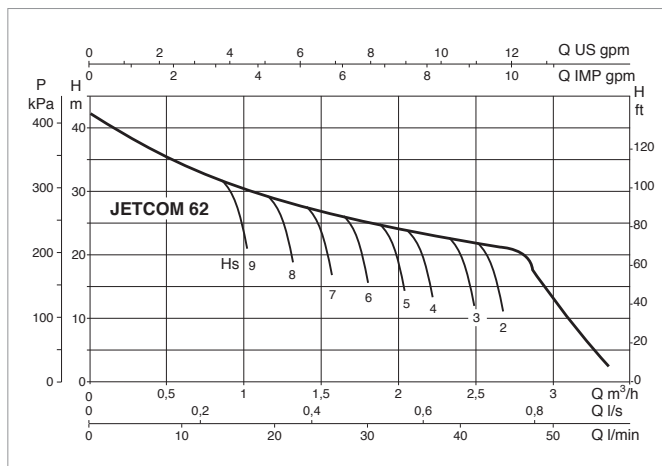


MODEL	ELECTRICAL DATA						
	POWER SUPPLY 50 Hz	P1 MAX kW	P2 NOMINAL		In A	CAPACITOR	
			kW	HP		µF	Vc
JETCOM 62 M	1x220-240 V ~	0.72	0.44	0.6	3.12	12.5	450


MODEL	A	B	C	E	F	G	H	H1	H2	I Ø	L	DNA GAS	DNM GAS	PACK DIMENSIONS			VOLUME (mc)	GROSS WEIGHT Kg
														L/A	L/B	H		
JETCOM 62	406	170	122	208	14	111	198	-	144	9	-	1"	1"	470	240	240	0.027	7.5

JETCOM 82-SELF-PRIMING CENTRIFUGAL ELECTRIC PUMPS FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from 0 °C to +35 °C - Maximum ambient temperature: +40°C

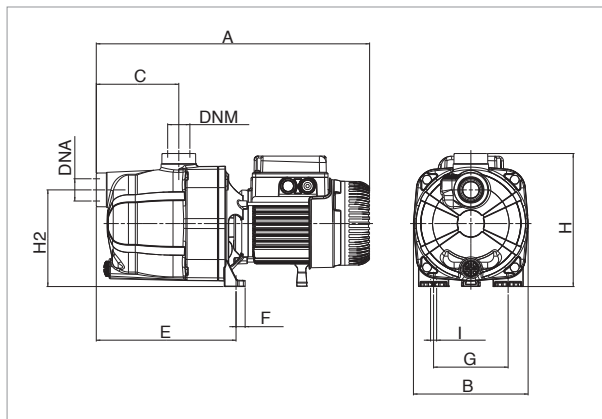

The performance curves are based on the kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

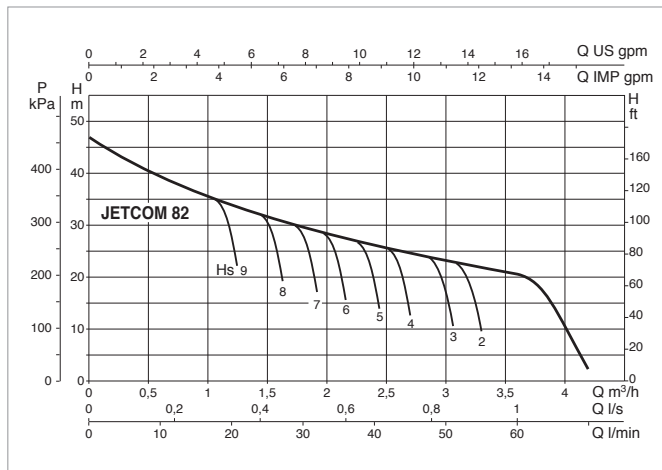


MODEL	ELECTRICAL DATA						
	POWER SUPPLY 50 Hz	P1 MAX kW	P2 NOMINAL		In A	CAPACITOR	
			kW	HP		µF	Vc
JETCOM 82 M	1x220-240 V ~	0.85	0.6	0.8	3.8	12.5	450


MODEL	A	B	C	E	F	G	H	H1	H2	I Ø	L	DNA GAS	DNM GAS	PACK DIMENSIONS			VOLUME (mc)	GROSS WEIGHT Kg
														L/A	L/B	H		
JETCOM 82	406	170	122	208	14	111	198	-	144	9	-	1"	1"	470	240	240	0.027	7.7

JET 102 - SELF-PRIMING CENTRIFUGAL ELECTRIC PUMPS FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from 0 °C to +35 °C - Maximum ambient temperature: +40°C

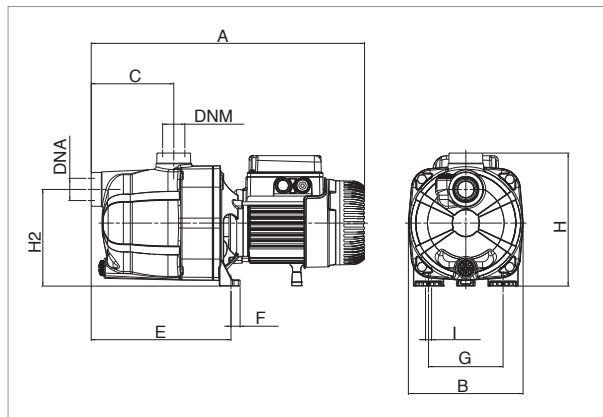

The performance curves are based on the kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

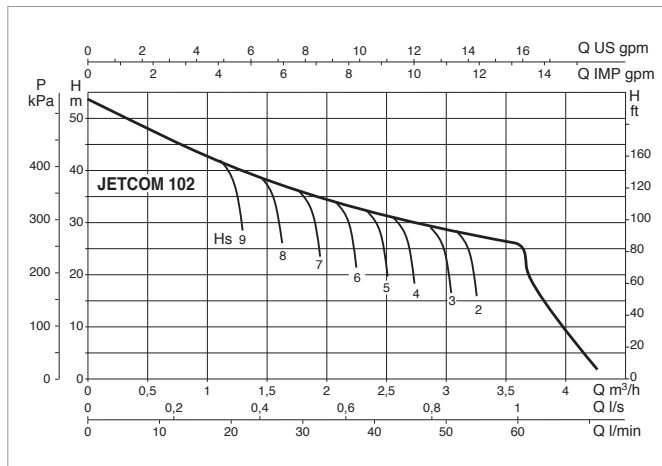


MODEL	ELECTRICAL DATA						
	POWER SUPPLY 50 Hz	P1 MAX kW	P2 NOMINAL		In A	CAPACITOR	
			kW	HP		µF	Vc
JETCOM 102 M	1x220-240 V ~	1.13	0.75	1	5.1	16	450
JETCOM 102 T	3x230-400 V ~	1.04	0.75	1	3.3-1.9	-	-


MODEL	A	B	C	E	F	G	H	H1	H2	I Ø	L	DNA GAS	DNM GAS	PACK DIMENSIONS			VOLUME (mc)	GROSS WEIGHT Kg
														L/A	L/B	H		
JETCOM 102	425	170	122	208	14	111	203	-	144	9	-	1"	1"	470	240	240	0.027	9.5

JETCOM 92-SELF-PRIMING CENTRIFUGAL ELECTRIC PUMPS FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from 0 °C to +35 °C - Maximum ambient temperature: +40°C

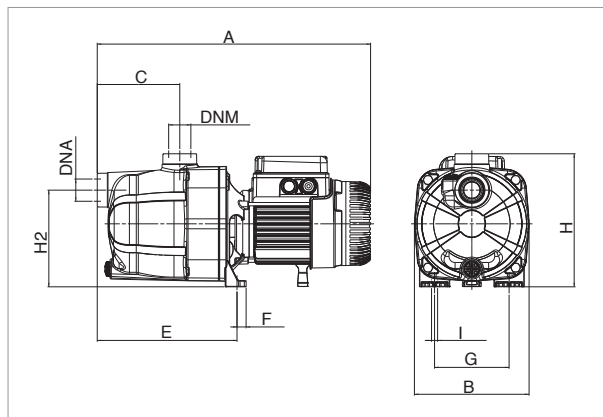

The performance curves are based on the kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

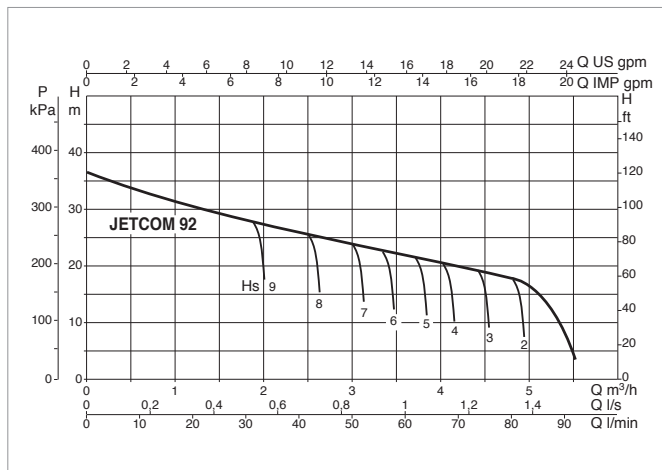


MODEL	ELECTRICAL DATA						
	POWER SUPPLY 50 Hz	P1 MAX kW	P2 NOMINAL		In A	CAPACITOR	
			kW	HP		µF	Vc
JETCOM 92 M	1x220-240 V ~	0.94	0.75	1	4.2	14	450


MODEL	A	B	C	E	F	G	H	H1	H2	I Ø	L	DNA GAS	DNM GAS	PACK DIMENSIONS			VOLUME (mc)	GROSS WEIGHT Kg
														L/A	L/B	H		
JETCOM 92	425	170	122	208	14	111	203	-	144	9	-	1"	1"	470	240	240	0.027	8.7

JET 132 - SELF-PRIMING CENTRIFUGAL ELECTRIC PUMPS FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from 0 °C to +35 °C - Maximum ambient temperature: +40°C

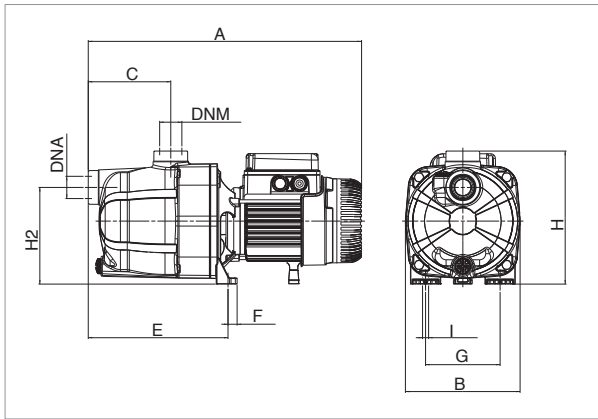


The performance curves are based on the kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

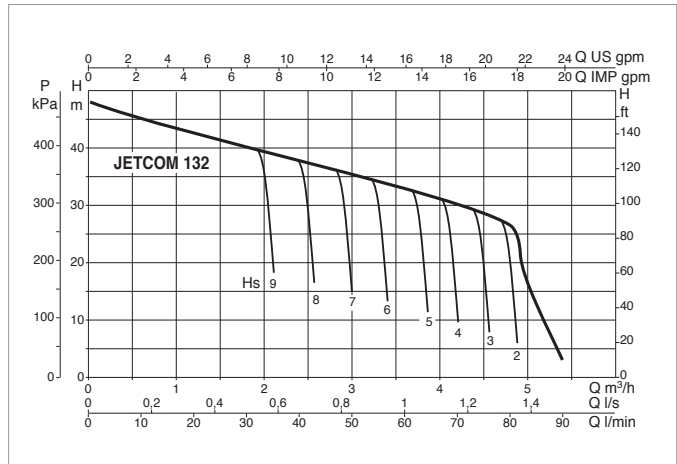

MODEL	ELECTRICAL DATA						
	POWER SUPPLY 50 Hz	P1 MAX kW	P2 NOMINAL		In A	CAPACITOR	
			kW	HP		µF	Vc
JETCOM 132 M	1x220-240 V ~	1.49	1	1.36	6.6	25	450
JETCOM 132 T	3x230-400 V ~	1.43	1	1.36	4.7-2.7	-	-

MODEL	A	B	C	E	F	G	H	H1	H2	I Ø	L	DNA GAS	DNM GAS	PACK DIMENSIONS			VOLUME (mc)	GROSS WEIGHT Kg
														L/A	L/B	H		
JETCOM 132 M	425	170	122	208	14	111	203	-	144	9	-	1"	1"	470	240	240	0.027	10.5
JETCOM 132 T	441	170	122	208	14	111	203	-	144	9	-	1"	1"	470	240	240	0.027	12.6

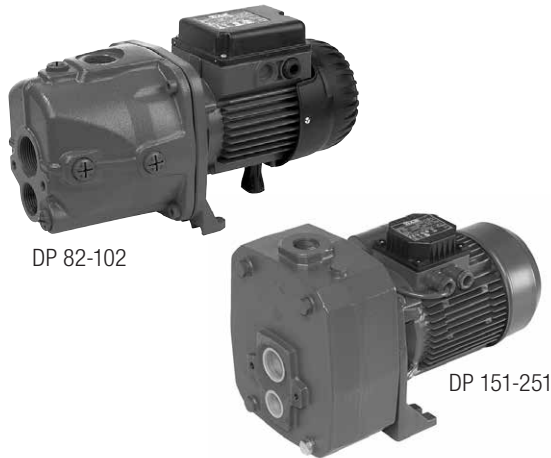

TECHNICAL DATA

Operating range: up to 4.3 m³/h.
Liquid quality requirements: clean, free from solid or abrasive contaminants, non-viscous, non-aggressive, uncrystallised and chemically neutral, close to the properties of water.
Liquid temperature range:
 from 0°C to +35°C for domestic use (EN 60335-2-41).
 for other use: from 0°C to +40°C
Maximum ambient temperature: +40°C
Maximum operating pressure:
 DP 82 - DP 102 6 bar (600 kPa).
 DP 151 - DP 251 8 bar (800 kPa).
Installation: fixed in a horizontal position.
Special executions on request: alternative voltages and/or frequencies.
Motor protection rating: IP 44
Terminal block protection rating: IP 55
Insulation class: F
Standard input voltage: single phase 220-240 V / 50 Hz
 three phase 230-400 V / 50 Hz

APPLICATIONS

Self priming centrifugal pump for suction up to 27 metres, reached by using the ejector to be inserted in wells from 4" in diameter or larger. Used for water supply in large country homes and small farms.

CONSTRUCTIONAL FEATURES OF THE PUMP

- Pump: Cast-iron pump body and motor support. Impeller and diffuser in technopolymer. Stainless steel wear ring. Carbon/ceramic mechanical seal.
- Ejector: Body in cast iron Venturi tube in technopolymer A and nozzle in brass. The ejector is available in three models (E 20 - E 25 - E 30) depending on the performance required.


CONSTRUCTIONAL FEATURES OF THE MOTOR

Rotor mounted on oversized greased-for-life ball bearings. Incorporated thermo-amperometric protection and permanently inserted capacitor in the single phase version. It is recommended to use remote overload protection for three phase motors, in compliance with current legislation. Manufactured pursuant to CEI 61-69 (EN 60335-2-41).

MATERIALS


N°	PARTS*	MATERIALS
1	PUMP BODY	200 UNI ISO 185 CAST IRON
2	EJECTOR BODY	200 UNI ISO 185 CAST IRON
3	FRAME	200 UNI ISO 185 CAST IRON
4	IMPELLER	TECHNOPOLYMER
6	DIFFUSER	TECHNOPOLYMER
7	SHAFT WITH ROTOR	AISI 416 STAINLESS STEEL X12 CRS13 UNI 6900/71 (DP 82 - DP 102) AISI 303 STAINLESS STEEL X10CRNIS 1809 UNI 6900/71 (DP 151 - DP 251)
8	VENTURI PIPE	TECHNOPOLYMER
9	NOZZLE	BRASS
16	MECHANICAL SEAL	CARBON/CERAMIC
28	OR GASKET	NBR RUBBER

* In contact with liquid

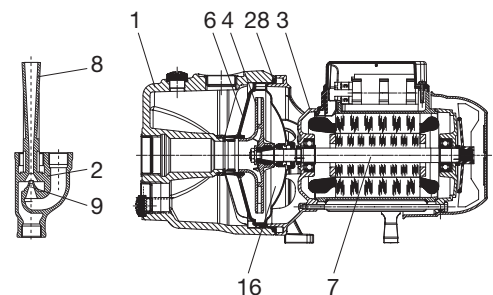

DP 82 - DP 102 - PUMPS FOR DEEP SUCTION FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from 0 °C to +35 °C - Maximum ambient temperature: +40°C

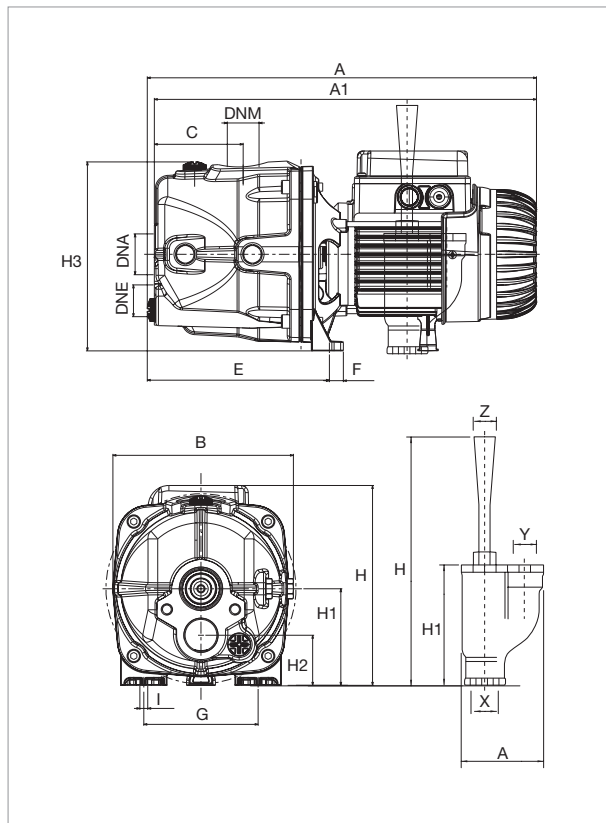

The performance curves are based on the kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.


HYDRAULIC DATA (n ≈ 2800 1/min.)								
TYPE PUMP	TYPE EJECTOR	DEEP SUCTION	Discharge pressure in bar					
			1.5	2	2.5	3	3.5	4
Capacity table in l/h								
DP 82 M - T	E 25	9	1813	1080	446	33	-	-
		12	1426	225	-	-	-	-
		15	900	326	-	-	-	-
	E 30	9	1753	1286	812	524	261	12
		12	1345	965	608	329	162	0
		15	1166	761	452	228	45	-
DP 102 M - T	E 25	9	2386	1756	1097	515	126	-
		12	1930	1190	536	87	-	-
		15	1459	773	252	-	-	-
	E 30	12	-	1240	872	566	329	156
		15	-	1028	701	449	255	96
		18	-	785	527	302	150	15
		21	-	635	374	180	39	-

MODEL	ELECTRICAL DATA						
	POWER SUPPLY 50 Hz	P1 MAX kW	P2 NOMINAL		I _n A	CAPACITOR	
			kW	HP		μF	V _c
DP 82 M	1x220-240 V ~	0.73	0.6	0.8	3.4	12.5	450
DP 82 T	3x230-400 V ~	0.73	0.6	0.8	2.6-1.5	-	-
DP 102 M	1x220-240 V ~	0.79	0.75	1	3.8	16	450
DP 102 T	3x230-400 V ~	0.64	0.75	1	2.6-1.5	-	-

MODEL	A	A1	B	C	E	F	G	H	H1	H2	H3	I Ø	DNA GAS	DNM GAS	DNE GAS	EJECTOR						PACK DIMENSIONS			VOLUME (mc)	GROSS WEIGHT Kg
																A	H	H1	X	Y	Z	L/A	L/B	H		
DP 82 M-T	377	371	175	86	177	13	111	194	94	49	179	9	1 1/4"	1"	1"	97	295	143	1" G	1" G	1 1/4" G	480	240	240	0.03	10.7
DP 102 M-T	398	392	175	86	177	13	111	203	94	49	179	9	1 1/4"	1"	1"	97	295	143	1" G	1" G	1 1/4" G	480	240	240	0.03	13

DP 151 - DP 251 - PUMPS FOR DEEP SUCTION FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from 0 °C to +35 °C - Maximum ambient temperature: +40°C

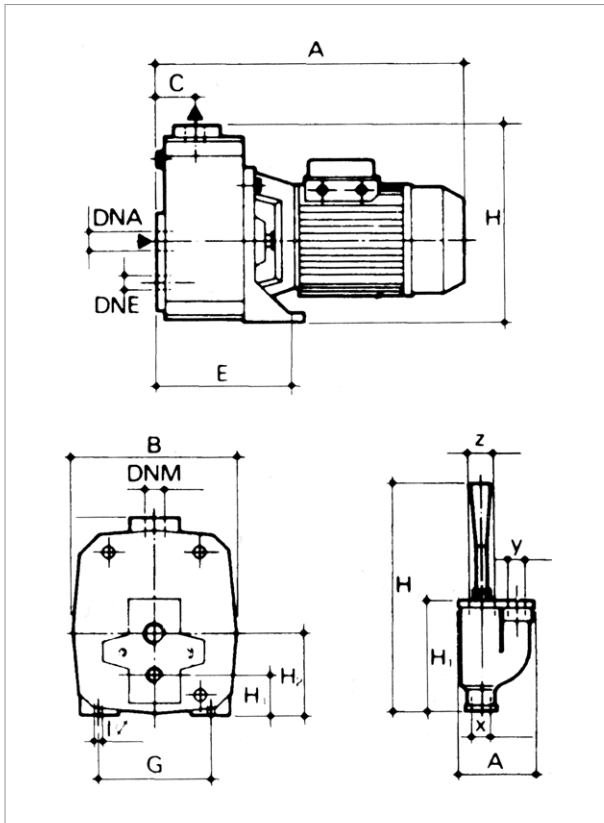

The performance curves are based on the kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

HYDRAULIC DATA (n ≈ 2800 1/min.)												
TYPE PUMP	TYPE EJECTOR	DEEP SUCTION	Discharge pressure in bar							Capacity table in l/h		
			3	3.5	4	4.5	5	5.5	6			6.5
DP 151 M - T	E 20	9	3470	2890	2220	1500	750	-	-	-	-	-
		12	3110	2510	1850	1100	300	-	-	-	-	-
		15	2710	2100	1380	640	-	-	-	-	-	-
		18	2360	1700	950	-	-	-	-	-	-	-
	E 25	15	2800	2330	1830	1350	900	520	-	-	-	-
		18	2530	2050	1550	1090	680	300	-	-	-	-
		21	2280	1800	1300	860	470	-	-	-	-	-
	E 30	21	1820	1650	1410	1160	910	700	520	-	-	-
		24	1680	1520	1260	1020	780	580	420	-	-	-
27		1550	1360	1110	880	680	490	330	-	-	-	
DP 251 M - T	E 20	9	4300	3600	2900	2180	1400	640	-	-	-	
		12	3750	3140	2540	1700	940	-	-	-	-	
		15	-	2780	2040	1300	500	-	-	-	-	
		18	-	2340	1610	820	-	-	-	-	-	
	E 25	15	-	2920	2400	1900	1400	950	570	-	-	
		18	-	2600	2110	1620	1150	720	360	-	-	
		21	-	2350	1850	1350	900	510	-	-	-	
		24	-	2050	1550	1080	660	300	-	-	-	
	E 30	21	-	-	1710	1480	1220	980	770	590	420	
		24	-	-	1580	1330	1080	850	670	490	330	
		27	-	-	1440	1200	950	750	560	400	250	
		-	-	-	-	-	-	-	-	-	-	-

MODEL	ELECTRICAL DATA						
	POWER SUPPLY 50 Hz	P1 MAX kW	P2 NOMINAL		I _n A	CAPACITOR	
			kW	HP		µF	V _c
DP 151 M	1x220-240 V ~	1.56	1.1	1.5	7	31.5	450
DP 151 T	3x230-400 V ~	1.45	1.1	1.5	4.7-2.7	-	-
DP 251 M	1x220-240 V ~	-	1.85	2.5	8.3	40	450
DP 251 T	3x230-400 V ~	-	1.85	2.5	5.6-3.2	-	-

MODEL	A	B	C	E	G	I Ø	H	H1	H2	DNA GAS	DNM GAS	DNE GAS	EJECTOR					PACK DIMENSIONS			VOLUME (mc)	GROSS WEIGHT Kg	
													A	H	H1	X	Y	Z	L/A	L/B			H
DP 151 M-T	388	210	50	197	145	11	155	52	108	1 1/4"	1"	1"	97	295	143	1" G	1" G	1 1/4" G	427	246	307	0.3	28.5
DP 251 M	462	210	50	197	145	11	155	53	108	1 1/4"	1"	1"	97	295	143	1" G	1" G	1 1/4" G	522	246	307	0.4	32.5
DP 251 T	388	210	50	197	145	11	155	53	108	1 1/4"	1"	1"	97	295	143	1" G	1" G	1 1/4" G	427	246	307	0.3	27.9



TECHNICAL DATA

Operating range:

from 0.4 to 5.4 m³/h with head up to 54 metres.

Liquid quality requirements: clean, free from solid or abrasive contaminants, non-viscous, non-aggressive, uncrystallised and chemically neutral, close to the properties of water.

Liquid temperature range:

from 0°C to +35°C for domestic use (EN 60335-2-41).

for other use: from 0°C to +40°C

Maximum suction depth: 8 metres.

Maximum ambient temperature: +40°C

Maximum operating pressure:

8 bar (800 kPa)

6 bar (600 kPa) only for models in technopolymer (JETCOM)

Installation: fixed in a horizontal position.

Special executions on request: alternative voltages and/or frequencies.

Motor protection rating: IP 44

Terminal block protection rating: IP 55

Insulation class: F

Standard input voltage: single phase 220/240 V / 50 Hz

APPLICATIONS

Self-priming electric centrifugal pump for gardening, horticulture, washing and leisure activities.

Equipped with a handle to aid in transport, a H07RN-F 2 metre power cord with plug and on-off switch.

Compact, easy to install, self-priming for pumping out pools, wells, and waterways even in the presence of air bubbles. Suitable for pumping water with low levels of sandy impurities.

CONSTRUCTIONAL FEATURES OF THE PUMP

Pump body in cast iron and motor support in die cast aluminium.

Impeller, diffuser, venturi tube in technopolymer.

Stainless steel wear ring and seal holder.

Carbon/ceramic mechanical seal.

CONSTRUCTIONAL FEATURES OF THE MOTOR

Asynchronous type, closed, with external air cooling.

Rotor mounted on oversized greased-for-life ball bearings, to guarantee low noise and long life.

Incorporated thermo-amperometric protection and permanently inserted capacitor.

Manufacture pursuant to CEI 2-3 and CEI 61-69 (EN 60335-2-41) standard.


GARDENJET

SELF-PRIMING CENTRIFUGAL ELECTRIC PUMPS


MATERIALS

N°	PARTS*	MATERIALS
1	PUMP BODY	GJL 200 UNI EN 1561 CAST IRON
3	FRAME	DIE CAST ALUMINIUM
4	IMPELLER	PPO-GF 20 (Noryl™)
7	SHAFT WITH ROTOR	AISI 416 STAINLESS STEEL X12CrS13 UNI EN 10088 (UNI 6900: 71)
16	MECHANICAL SEAL	CARBON/CERAMIC
28	OR GASKET	NBR RUBBER
160	VENTURI DIFFUSER NOZZEL GROUP	PPO-GF 20 (Noryl™)

* In contact with liquid

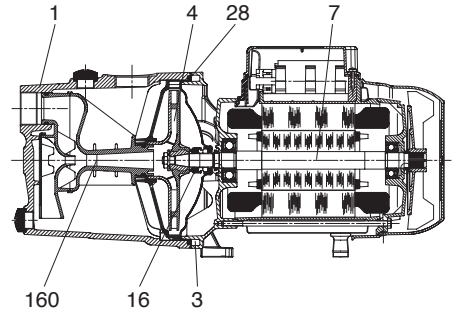


SELF PRIMING CAPACITY

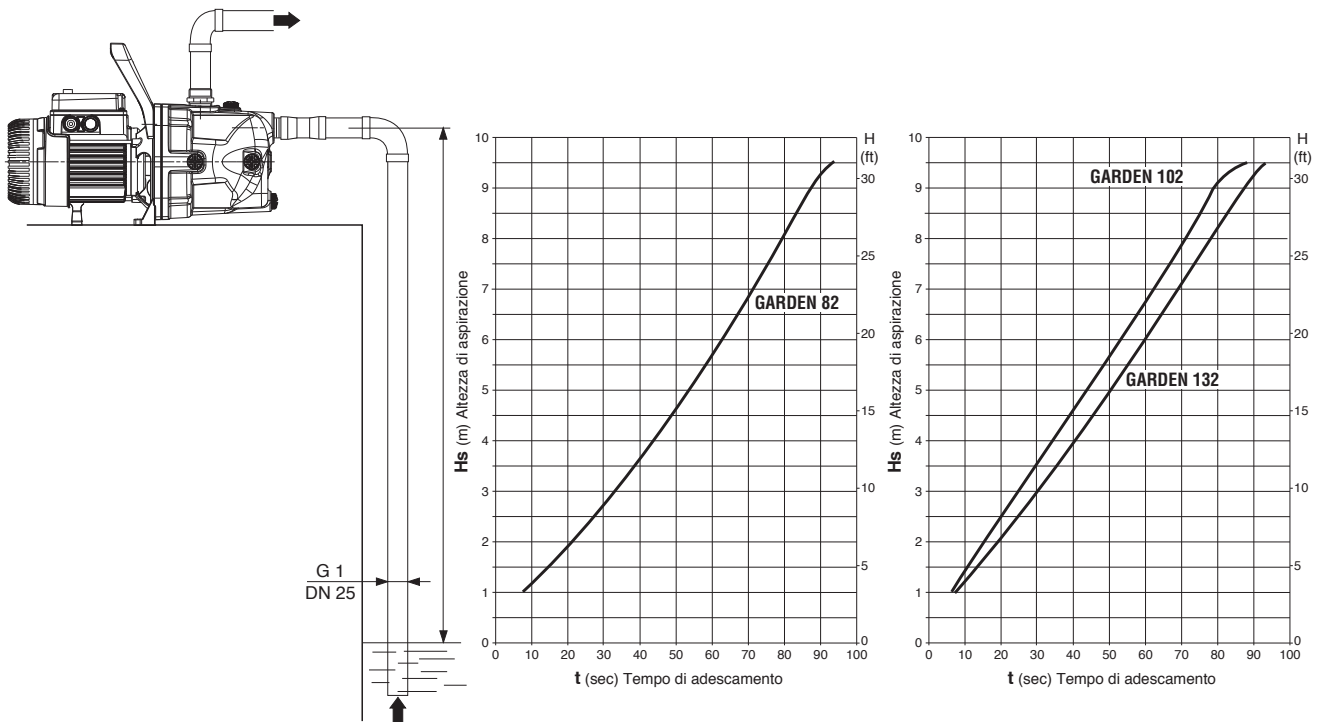

PERFORMANCE RANGE

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

GRAPHIC SELECTION TABLE




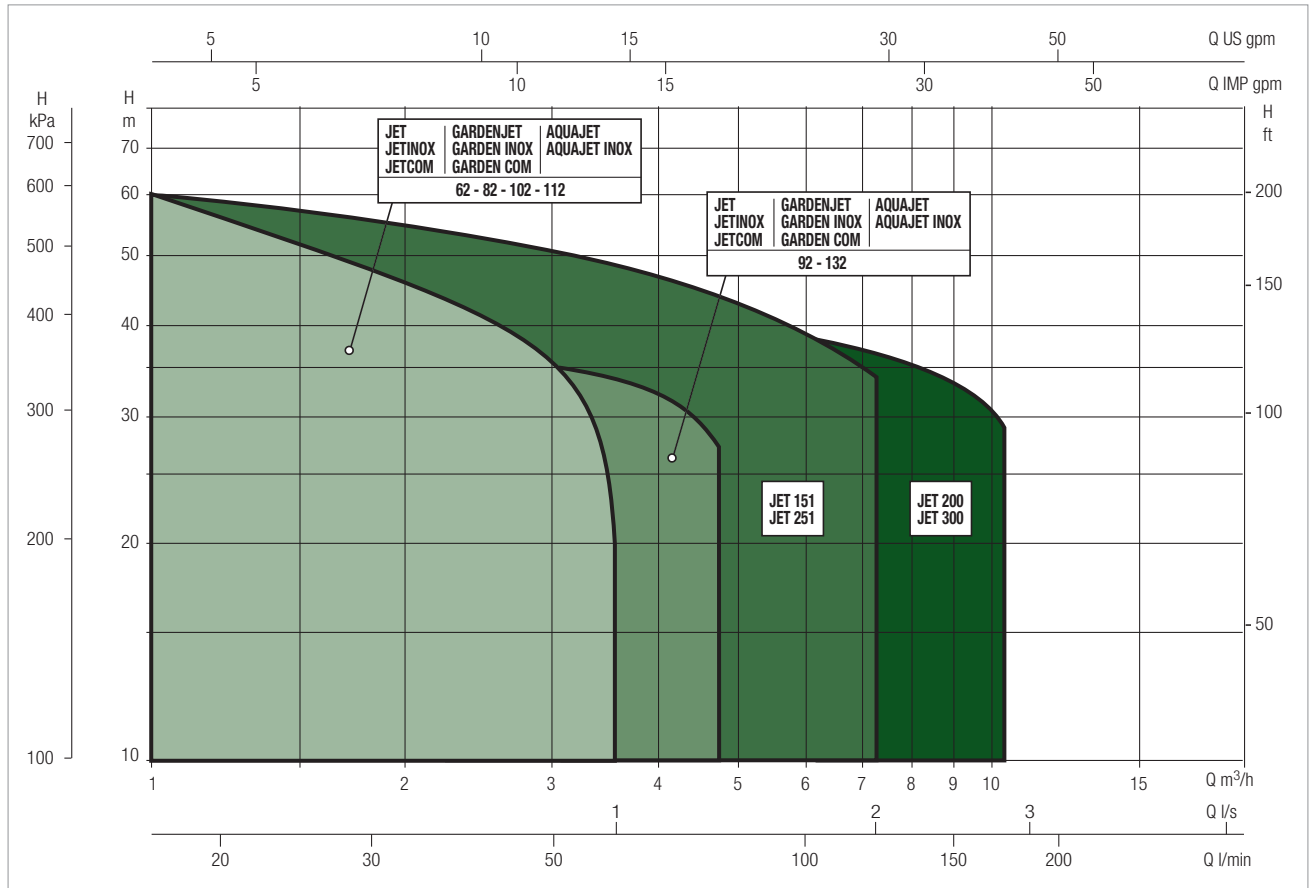


GARDENJET SELECTION TABLE

MODEL	Q=m ³ /h	0	0.6	1.2	1.8	2.4	3.0	3.6	4.2	4.8
	Q=l/min	0	10	20	30	40	50	60	70	80
GARDENJET 82 M	H (m)	47	40	34	30	26.2	23.5	20.3		
GARDENJET 102 M		53.8	47	41	36.3	32.4	28.8	25.8		
GARDENJET 132 M		48.3	45.6	42.8	40	37.6	35	32.5	30	27.2

GARDENJET - SELF-PRIMING CENTRIFUGAL ELECTRIC PUMPS FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from 0 °C to +35 °C - Maximum ambient temperature: +40°C

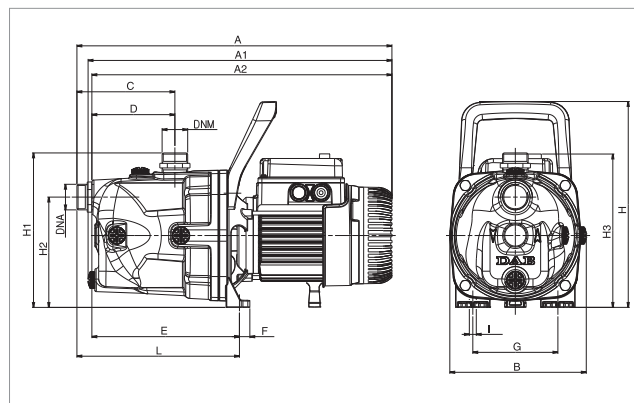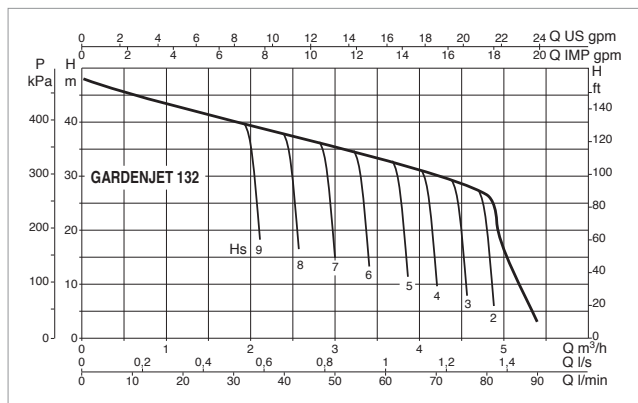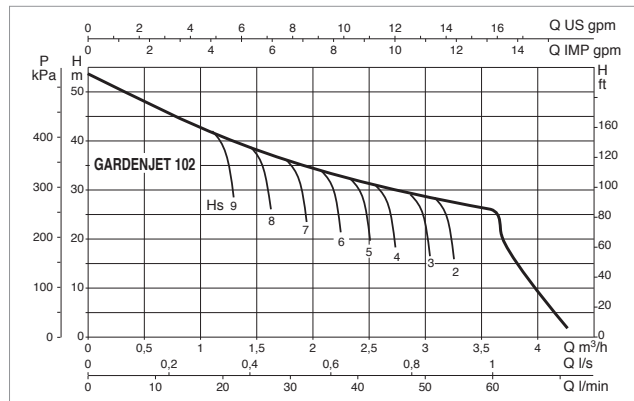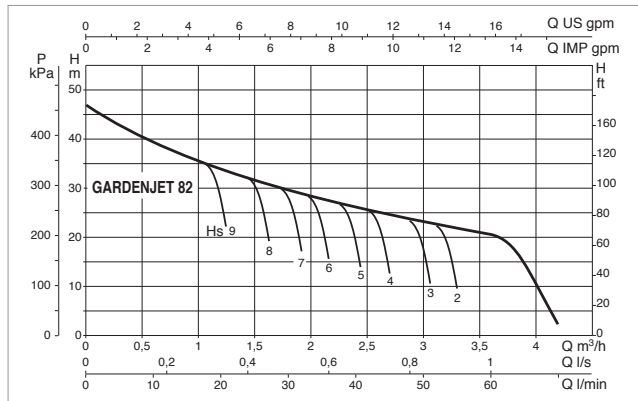

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	ELECTRICAL DATA						
	POWER SUPPLY 50 Hz	P1 MAX kW	P2 NOMINAL		In A	CAPACITOR	
			kW	HP		µF	Vc
GARDENJET 82 M	1x220-240 V ~	0.85	0.6	0.8	3.8	12.5	450
GARDENJET 102 M	1x220-240 V ~	1.13	0.75	1	5.1	16	450
GARDENJET 132 M	1x220-240 V ~	1.49	1	1.36	6.6	25	450

MODEL	A	A1	A2	B	C	D	E	F	G	H	H1	H2	H3	H4	I Ø	L	DNA GAS	DNM GAS	PACK DIMENSIONS			VOLUME (mc)	GROSS WEIGHT Kg
																			L/A	L/B	H		
GARDENJET 82 M	410	395	390	178	127	108	192	14	111	268	201	144	199	-	9	212	1"	1"	470	240	240	0.027	11.2
GARDENJET 102 M	429	414	409	178	127	108	192	14	111	268	200	144	209	-	9	212	1"	1"	470	240	240	0.027	13.0
GARDENJET 132 M	429	414	409	178	127	180	192	14	111	268	200	144	209	-	9	212	1"	1"	470	240	240	0.027	14.0

GARDEN INOX

SELF-PRIMING CENTRIFUGAL ELECTRIC PUMPS



TECHNICAL DATA

Operating range:

from 0.4 to 5.4 m³/h with head up to 54 metres.

Liquid quality requirements: clean, free from solid or abrasive contaminants, non-viscous, non-aggressive, uncrystallised and chemically neutral, close to the properties of water.

Liquid temperature range:

from 0°C to +35°C for domestic use (EN 60335-2-41).

for other use: from 0°C to +40°C

Maximum suction depth: 8 metres.

Maximum ambient temperature: +40°C

Maximum operating pressure: 8 bar (800 kPa)

6 bar (600 kPa) only for models in technopolymer (JETCOM)

Installation: fixed in a horizontal position.

Special executions on request: alternative voltages and/or frequencies.

Motor protection rating: IP 44

Terminal block protection rating: IP 55

Insulation class: F

Standard input voltage: single phase 220/240 V / 50 Hz

APPLICATIONS

Self-priming electric centrifugal pump for gardening, horticulture, washing and leisure activities.

Equipped with a handle to aid in transport, a H07RN-F 2 metre power cord with plug and on-off switch.

Compact, easy to install, self-priming for pumping out pools, wells, and waterways even in the presence of air bubbles. Suitable for pumping water with low levels of sandy impurities.

CONSTRUCTIONAL FEATURES OF THE PUMP

Pump body in stainless steel and motor support in die cast aluminium.

Impeller, diffuser, venturi tube in technopolymer.

Stainless steel wear ring and seal holder.

Carbon/ceramic mechanical seal.

CONSTRUCTIONAL FEATURES OF THE MOTOR

Asynchronous type, closed, with external air cooling.

Rotor mounted on oversized greased-for-life ball bearings, to guarantee low noise and long life.

Incorporated thermo-amperometric protection and permanently inserted capacitor.

Manufacture pursuant to CEI 2-3 and CEI 61-69 (EN 60335-2-41) standard.


GARDEN INOX

SELF-PRIMING CENTRIFUGAL ELECTRIC PUMPS




MATERIALS

N°	PARTS*	MATERIALS
1	PUMP BODY	GJL 200 UNI EN 1561 CAST IRON
3	FRAME	DIE CAST ALUMINIUM
4	IMPELLER	PPO-GF 20 (Noryl™)
7	SHAFT WITH ROTOR	AISI 416 STAINLESS STEEL X12CrS13 UNI EN 10088 (UNI 6900: 71)
16	MECHANICAL SEAL	CARBON/CERAMIC
28	OR GASKET	NBR RUBBER
160	VENTURI DIFFUSER NOZZEL GROUP	PPO-GF 20 (Noryl™)

* In contact with liquid

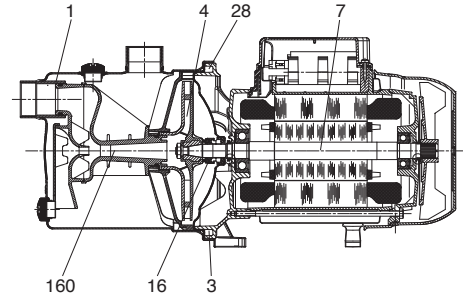

SELF PRIMING CAPACITY

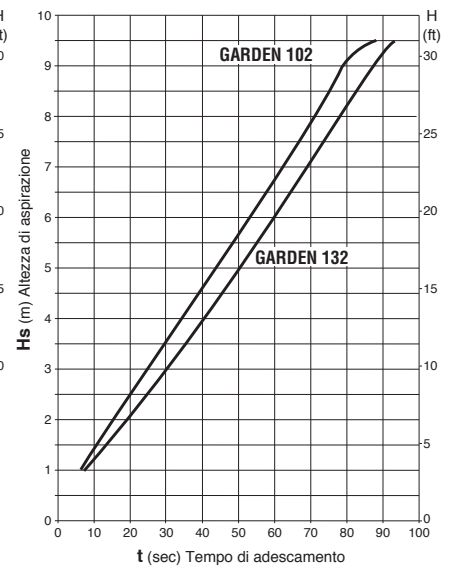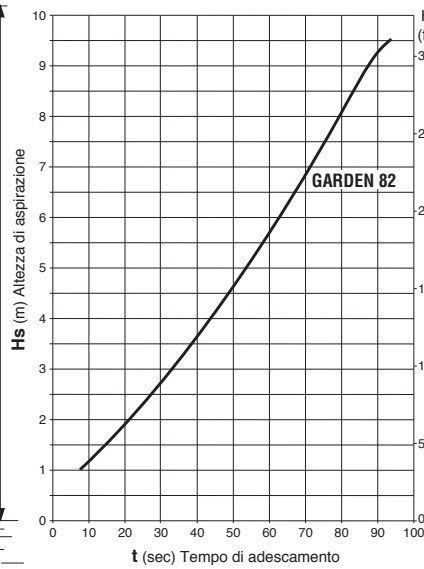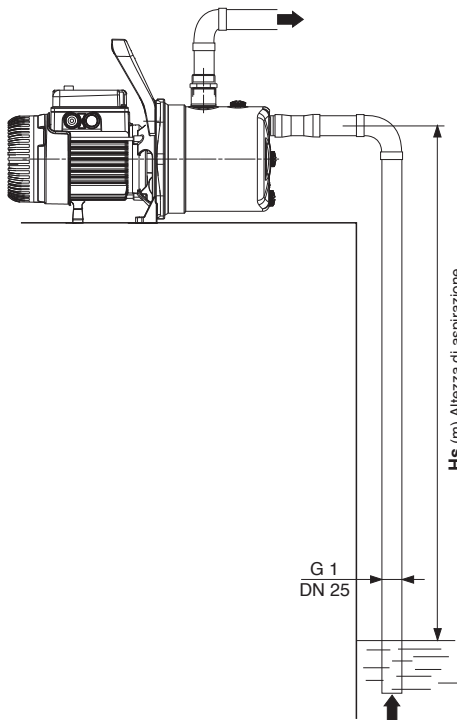


GARDEN INOX

SELF-PRIMING CENTRIFUGAL ELECTRIC PUMPS

PERFORMANCE RANGE

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

GRAPHIC SELECTION TABLE




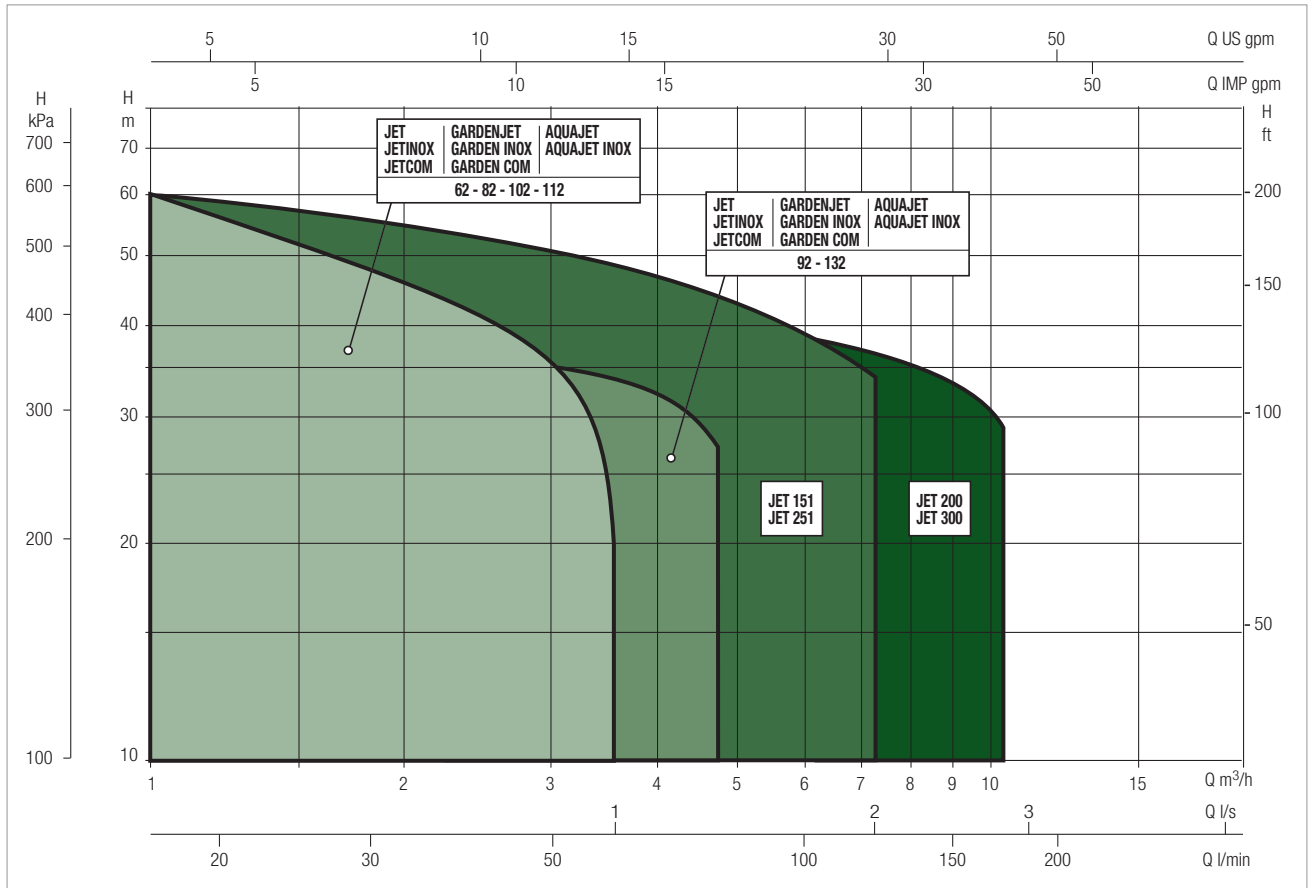


GARDEN INOX SELECTION TABLE

MODEL	Q=m ³ /h	0	0.6	1.2	1.8	2.4	3.0	3.6	4.2	4.8
	Q=l/min	0	10	20	30	40	50	60	70	80
GARDEN INOX 82 M	H (m)	47	40	34	30	26.2	23.5	20.3		
GARDEN INOX 102M		53.8	47	41	36.3	32.4	28.8	25.8		
GARDEN INOX 132M		48.3	45.6	42.8	40	37.6	35	32.5	30	27.2

GARDEN INOX - SELF-PRIMING CENTRIFUGAL ELECTRIC PUMPS FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from 0 °C to +35 °C - Maximum ambient temperature: +40°C

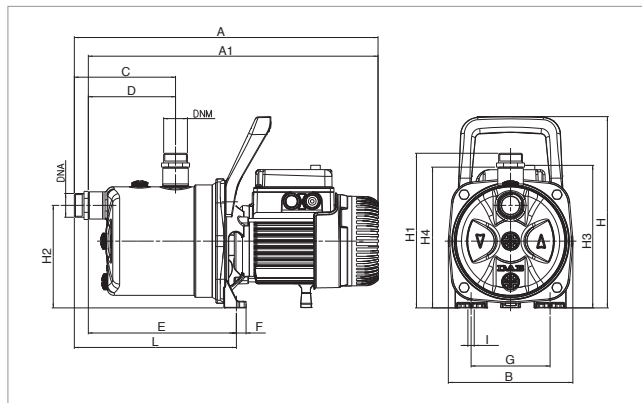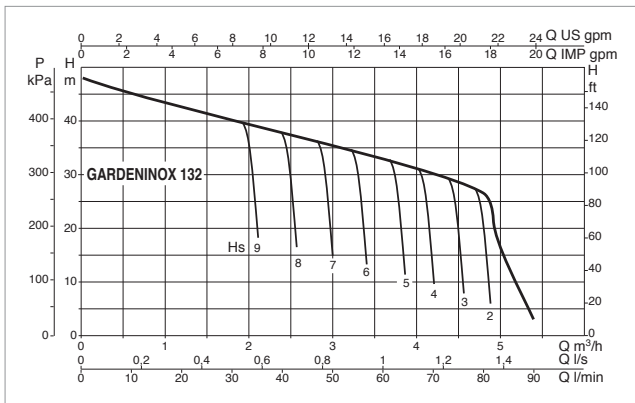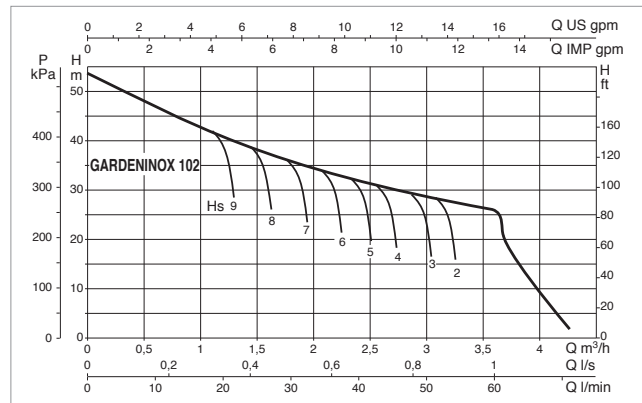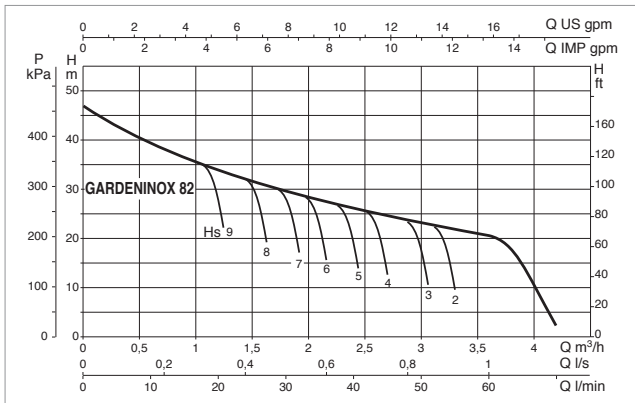

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	POWER SUPPLY 50 Hz	P1 MAX kW	ELECTRICAL DATA		In A	CAPACITOR	
			P2 NOMINAL			µF	Vc
			kW	HP			
GARDEN INOX 82 M	1x220-240 V ~	0.85	0.6	0.8	3.8	12.5	450
GARDEN INOX 102M	1x220-240 V ~	1.13	0.75	1	5.1	16	450
GARDEN INOX 132M	1x220-240 V ~	1.49	1	1.36	6.6	25	450

MODEL	A	A1	A2	B	C	D	E	F	G	H	H1	H2	H3	H4	I Ø	L	DNA GAS	DNM GAS	PACK DIMENSIONS			VOLUME (mc)	GROSS WEIGHT Kg
																			L/A	L/B	H		
GARDEN INOX 82 M	424	406	-	174	142	122	207	14	111	268	216	144	199	197	9	227	1"	1"	470	240	240	0.027	10.7
GARDEN INOX 102M	444	424	-	174	142	122	207	14	111	268	216	144	209	197	9	227	1"	1"	470	240	240	0.027	12.5
GARDEN INOX 132M	444	424	-	174	142	122	207	14	111	268	216	144	209	197	9	227	1"	1"	470	240	240	0.027	13.5

GARDEN COM

SELF-PRIMING CENTRIFUGAL ELECTRIC PUMPS



TECHNICAL DATA

Operating range:

from 0.4 to 5.4 m³/h with head up to 54 metres.

Liquid quality requirements: clean, free from solid or abrasive contaminants, non-viscous, non-aggressive, uncrystallised and chemically neutral, close to the properties of water.

Liquid temperature range:

from 0°C to +35°C for domestic use (EN 60335-2-41).

for other use: from 0°C to +40°C

Maximum suction depth: 8 metres.

Maximum ambient temperature: +40°C

Maximum operating pressure: 8 bar (800 kPa)

6 bar (600 kPa) only for models in technopolymer (JETCOM)

Installation: fixed in a horizontal position.

Special executions on request: alternative voltages and/or frequencies.

Motor protection rating: IP 44

Terminal block protection rating: IP 55

Insulation class: F

Standard input voltage: single phase 220/240 V / 50 Hz

APPLICATIONS

Self-priming electric centrifugal pump for gardening, horticulture, washing and leisure activities. Equipped with a handle to aid in transport, a H07RN-F 2 metre power cord with plug and on-off switch. Compact, easy to install, self-priming for pumping out pools, wells, and waterways even in the presence of air bubbles. Suitable for pumping water with low levels of sandy impurities.

CONSTRUCTIONAL FEATURES OF THE PUMP

Pump body in technopolymer and motor support in die cast aluminium.

Impeller, diffuser, venturi tube in technopolymer.

Stainless steel wear ring and seal holder.

Carbon/ceramic mechanical seal.

CONSTRUCTIONAL FEATURES OF THE MOTOR

Asynchronous type, closed, with external air cooling.

Rotor mounted on oversized greased-for-life ball bearings, to guarantee low noise and long life.

Incorporated thermo-amperometric protection and permanently inserted capacitor.

Manufacture pursuant to CEI 2-3 and CEI 61-69 (EN 60335-2-41) standard.


GARDEN COM

SELF-PRIMING CENTRIFUGAL ELECTRIC PUMPS


MATERIALS

N°	PARTS*	MATERIALS
1	PUMP BODY	GJL 200 UNI EN 1561 CAST IRON
3	FRAME	DIE CAST ALUMINIUM
4	IMPELLER	PPO-GF 20 (Noryl™)
7	SHAFT WITH ROTOR	AISI 416 STAINLESS STEEL X12CrS13 UNI EN 10088 (UNI 6900: 71)
16	MECHANICAL SEAL	CARBON/CERAMIC
28	OR GASKET	NBR RUBBER
160	VENTURI DIFFUSER NOZZEL GROUP	PPO-GF 20 (Noryl™)

* In contact with liquid

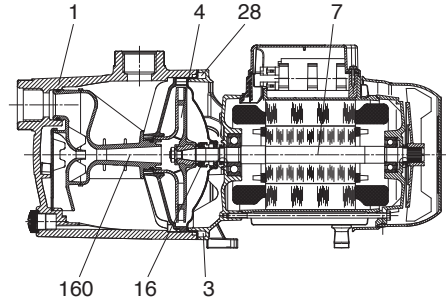

SELF PRIMING CAPACITY

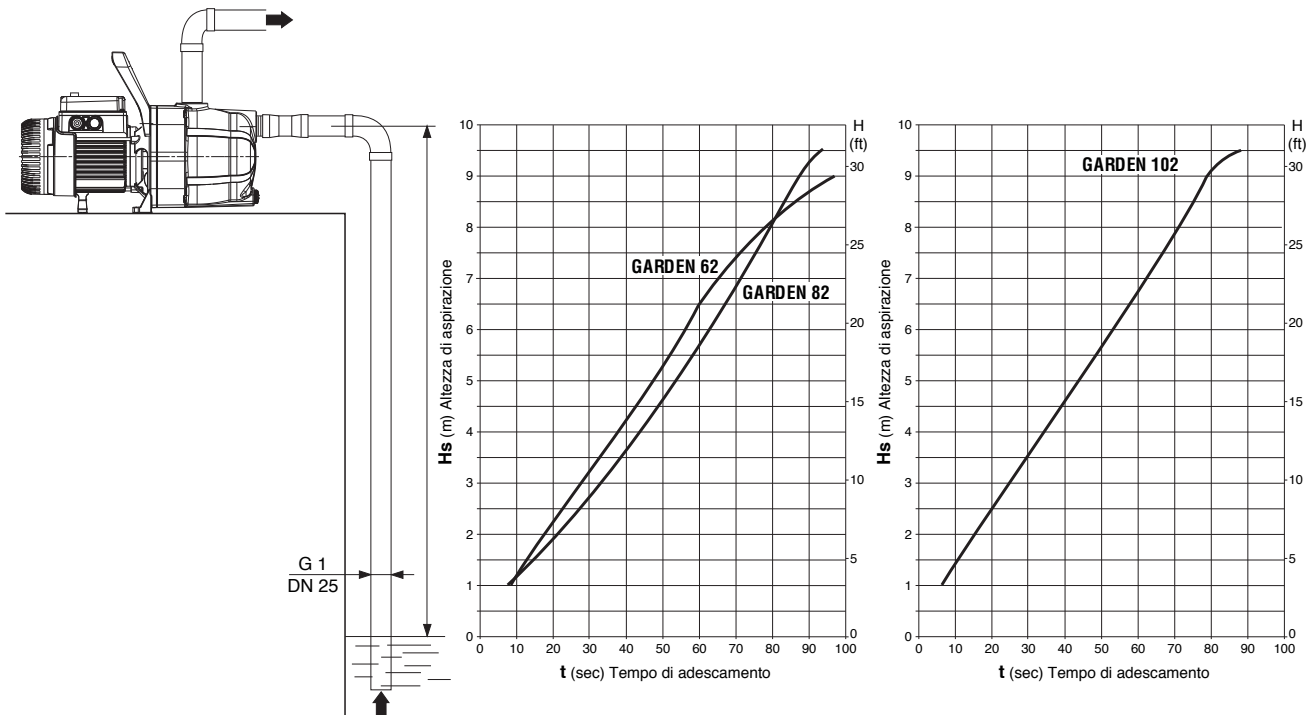


GARDEN COM

SELF-PRIMING CENTRIFUGAL ELECTRIC PUMPS

PERFORMANCE RANGE

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

GRAPHIC SELECTION TABLE




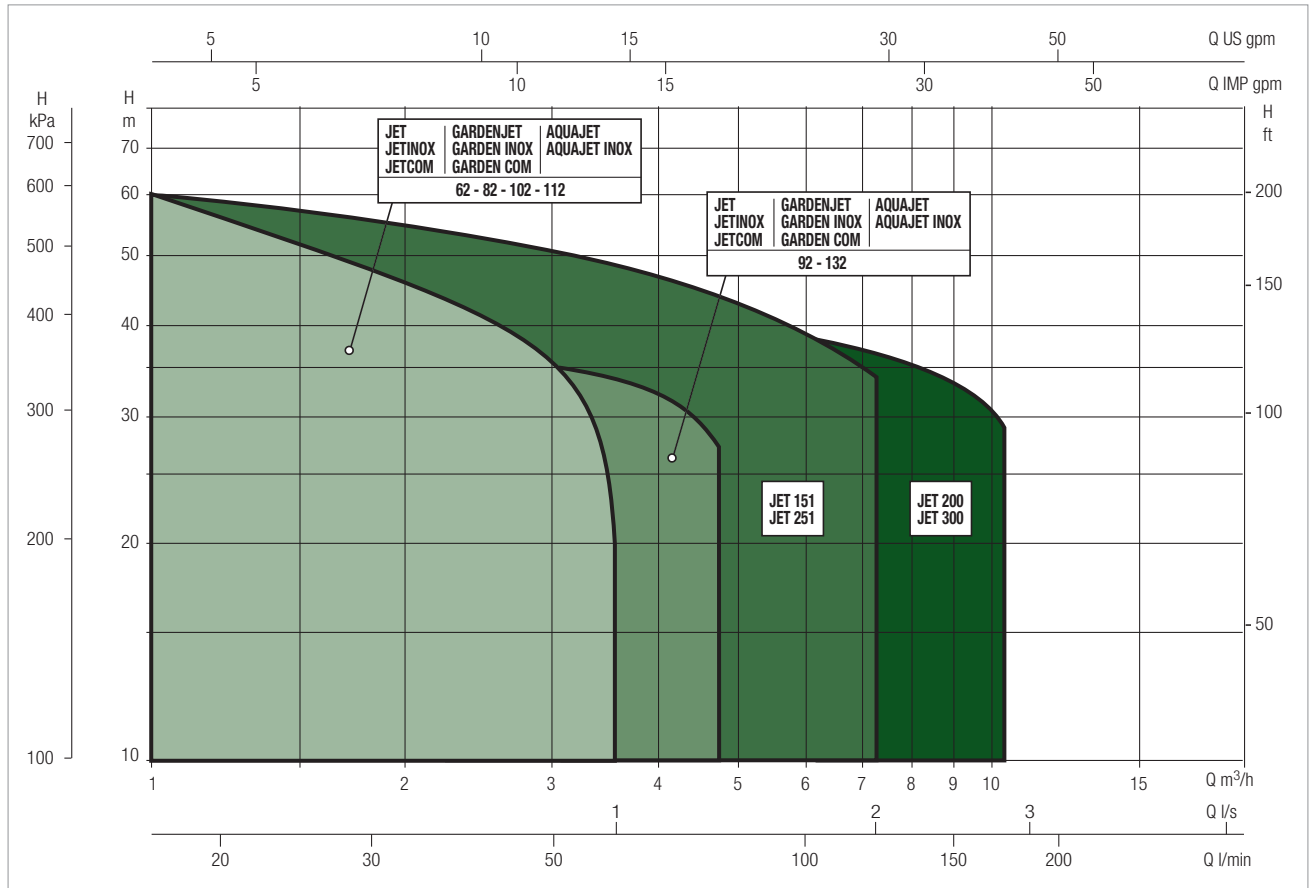


GARDEN COM SELECTION TABLE

MODEL	Q=m ³ /h	0	0.6	1.2	1.8	2.4	3.0	3.6	4.2	4.8
	Q=l/min	0	10	20	30	40	50	60	70	80
GARDEN COM 62 M	H (m)	42.7	35	29.2	25.6	22.9	13			
GARDEN COM 82 M		47	40	34	30	26.2	23.5	20.3		
GARDEN COM 102 M		53.8	47	41	36.3	32.4	28.8	25.8		

GARDEN COM - SELF-PRIMING CENTRIFUGAL ELECTRIC PUMPS FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from 0 °C to +35 °C - Maximum ambient temperature: +40°C

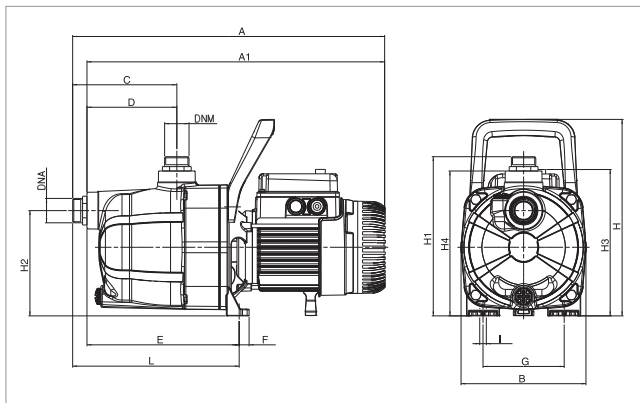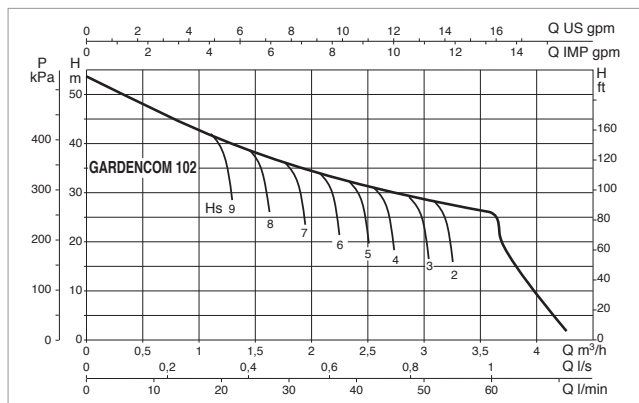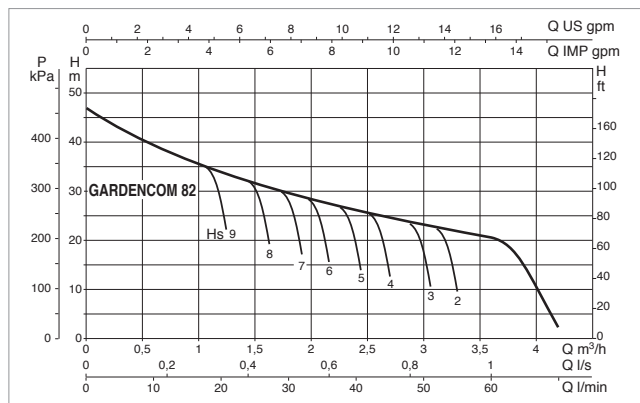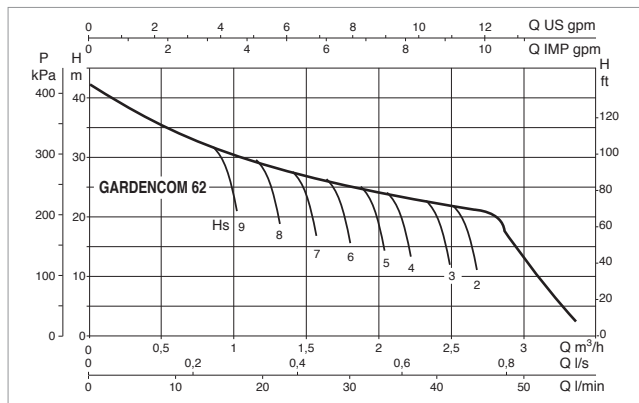

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	POWER SUPPLY 50 Hz	P1 MAX kW	ELECTRICAL DATA		In A	CAPACITOR	
			P2 NOMINAL			μF	Vc
			kW	HP			
GARDEN COM 62 M	1x220-240 V ~	0.72	0.44	0.6	3.12	12.5	450
GARDEN COM 82 M	1x220-240 V ~	0.85	0.6	0.8	3.8	12.5	450
GARDEN COM 102 M	1x220-240 V ~	1.13	0.75	1	5.1	16	450

MODEL	A	A1	A2	B	C	D	E	F	G	H	H1	H2	H3	H4	I Ø	L	DNA GAS	DNM GAS	PACK DIMENSIONS			VOLUME (mc)	GROSS WEIGHT Kg
																			L/A	L/B	H		
GARDEN COM 62 M	425	406	-	170	142	122	208	14	111	268	217	144	199	198	9	227	1"	1"	470	240	240	0.027	8.0
GARDEN COM 82 M	425	406	-	170	142	122	208	14	111	268	217	144	199	198	9	227	1"	1"	470	240	240	0.027	8.2
GARDEN COM 102 M	444	425	-	170	142	122	208	14	111	268	217	144	209	203	9	227	1"	1"	470	240	240	0.027	10.0



TECHNICAL DATA

Operating range:

from 10 to 120 litres/min. with head up to 72 m.

Liquid quality requirements: clean, free from solid or abrasive contaminants, non-viscous, non-aggressive, uncrystallised and chemically neutral, close to the properties of water.

Liquid temperature range:

for domestic use: from 0°C to +35°C (EN 60335-2-41)

for other use: from 0°C to +40°C

Maximum ambient temperature: +40°C

Maximum operating pressure: 8 bar (800 kPa)

Installation: fixed or portable in a horizontal position.

Motor protection rating: IP 44

Terminal block protection rating: IP 55

Insulation class: F

Standard input voltage: single phase 220-240 V / 50 Hz - 2 poles
three phase 230/400 V - 50 Hz - 2 poli

APPLICATIONS

Multi-stage centrifugal pump with horizontal shaft, featuring extremely quiet operation suitable for domestic water supply and pressurisation, irrigation of gardens and general water movement.

CONSTRUCTIONAL FEATURES OF THE PUMP

Pump body in 200 UNI ISO 185 cast iron. Motor support in die cast aluminium, with seal holder cover in AISI 304 stainless steel. Carbon/ceramic mechanical seal. Rotor shaft in AISI 304 stainless steel. Impeller and diffuser bodies and diffuser in technopolymer. Stainless steel wear ring.

CONSTRUCTIONAL FEATURES OF THE MOTOR

Asynchronous, continuous service motor.


Incorporated thermo-amperometric protection and permanently inserted capacitor in the single phase version.

Overload protection to be provided by the user for the three-phase version.

MATERIALS

N°	PARTS *	MATERIALS
1	PUMP BODY	200 UNI ISO 185 CAST IRON
4	IMPELLER	TECHNOPOLYMER
6	DIFFUSER	TECHNOPOLYMER
7	SHAFT WITH ROTOR	AISI 304 STAINLESS STEEL X5CrNi 1810 UNI 6900/71
16	MECHANICAL SEAL	CARBON/CERAMIC
28	OR GASKET	NBR
36	SEAL HOLDER COVER	AISI 304 STAINLESS STEEL X5CrNi 1810 UNI 6900/71
98	DIFFUSER BODY	TECHNOPOLYMER
304	REAR DISC	TECHNOPOLYMER


* In contact with liquid

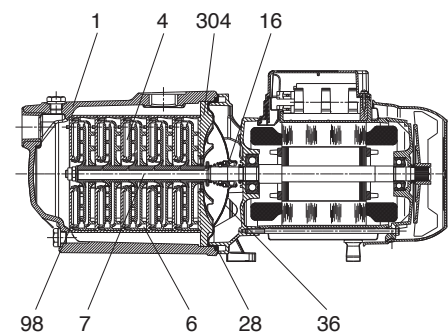

PERFORMANCE RANGE

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

GRAPHIC SELECTION TABLE


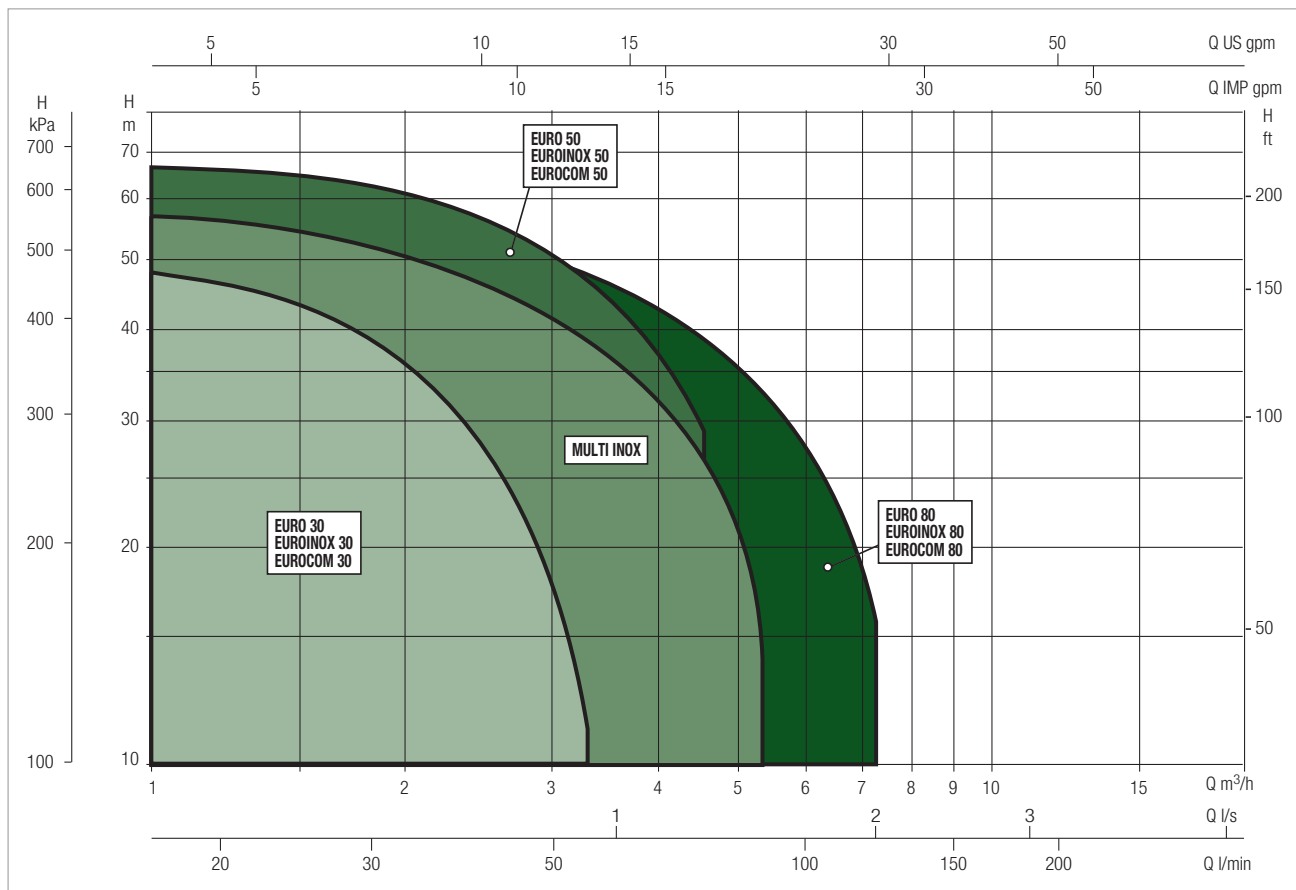


EURO SELECTION TABLE

MODEL	Q=m ³ /h	0	0.6	1.2	1.8	2.4	3.0	3.6	4.2	4.8	6	7.2
	Q=l/min	0	10	20	30	40	50	60	70	80	100	120
EURO 25/30 M	H (m)	34.4	31.7	28.3	23.5	17.5	11					
EURO 30/30 M		46	42.2	37.8	31.2	23.3	14.3					
EURO 40/30 M		57	52.7	47	38.8	29	17.7					
EURO 30/50 M		42.5	40.2	38.2	36.2	33.8	30	24.8	19.5	14		
EURO 40/50 M		57.5	55.3	52.8	50.1	47.1	42.7	35.8	28	19		
EURO 40/50 T		57.5	55.3	52.8	50.1	47.1	42.7	35.8	28	19		
EURO 50/50 M		72	68.5	65.5	62.1	58.2	52.2	43.6	34.5	26		
EURO 50/50 T		72	68.5	65.5	62.1	58.2	52.2	43.6	34.5	26		
EURO 30/80 M		47		46.5	45	43.5	41	38	34.5	31	23	12
EURO 30/80 T		47		46.5	45	43.5	41	38	34.5	31	23	12
EURO 40/80 M		59		57	56	54	51	47	43.5	39	29.5	16.5
EURO 40/80 T		59		57	56	54	51	47	43.5	39	29.5	16.5

EURO 30-SELF-PRIMING CENTRIFUGAL ELECTRIC PUMPS FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from 0 °C to +35 °C - Maximum ambient temperature: +40°C

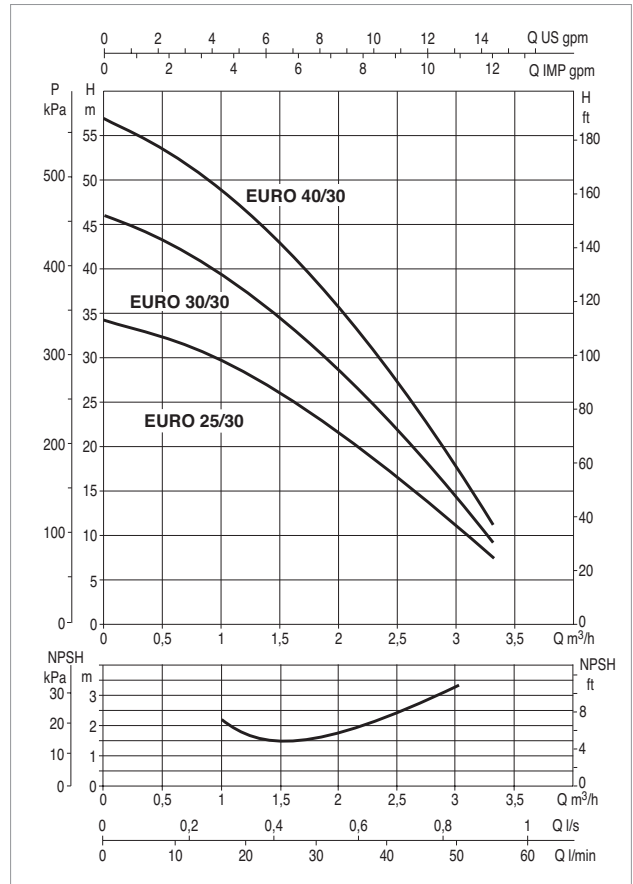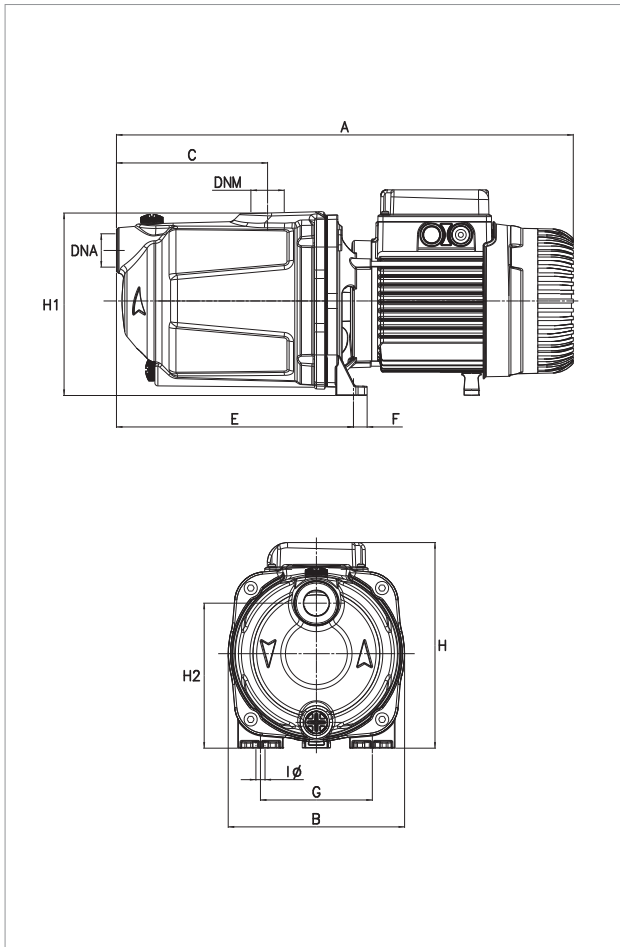



The performance curves are based on the kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	ELECTRICAL DATA							
	N° IMPELLER	POWER SUPPLY 50 Hz	P1 MAX KW	P2 NOMINAL		In A	CAPACITOR	
				kW	HP		µF	Vc
EURO 25/30 M	3	1 x 220 - 240 V ~	0.510	0.37	0.5	2.4	10	450
EURO 30/30 M	4	1 x 220 - 240 V ~	0.74	0.45	0.6	3.2	12.5	450
EURO 40/30 M	5	1 x 220 - 240 V ~	0.870	0.55	0.75	3.9	12.5	450

MODEL	A	B	C	E	F	G	I Ø	H	H1	H2	DNA GAS	DNM GAS	PACK DIMENSIONS			VOLUME (mc)	GROSS WEIGHT Kg
													L/A	L/B	H		
EURO 25/30 M	378	175	94.5	180	13.5	111	9	194	179	143.5	1"	1"	440	206	245	0.025	10.7
EURO 30/30 M	433	175	149.5	235	13.5	111	9	194	179	143.5	1"	1"	480	212	265	0.031	12.7
EURO 40/30 M	433	175	149.5	235	13.5	111	9	194	179	143.5	1"	1"	480	212	265	0.031	12.8

EURO 50-SELF-PRIMING CENTRIFUGAL ELECTRIC PUMPS FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from 0 °C to +35 °C - Maximum ambient temperature: +40°C

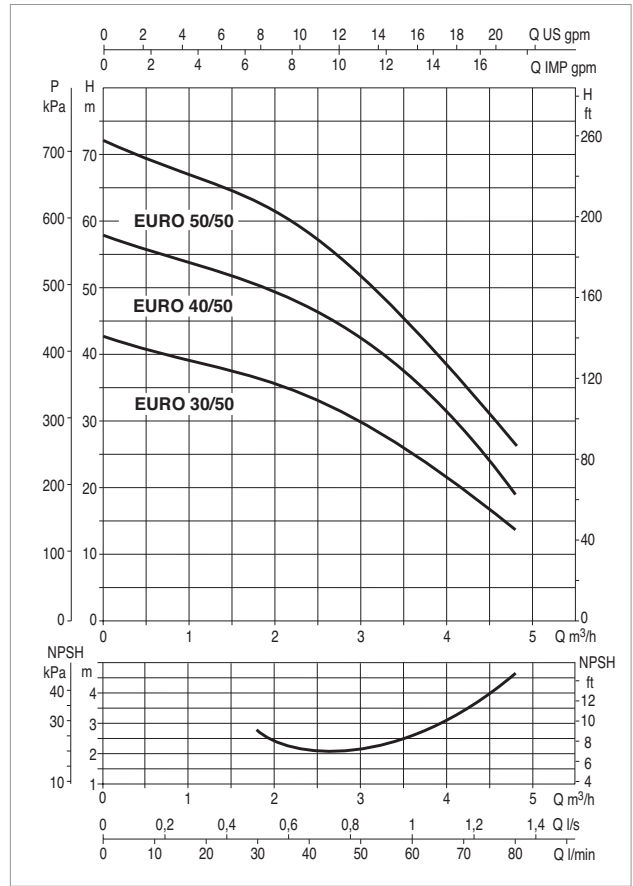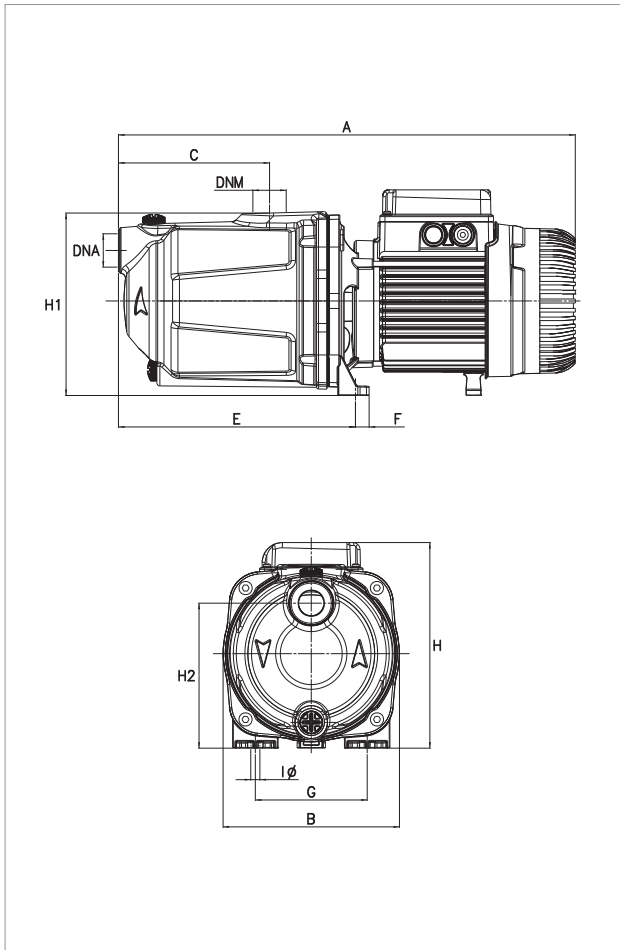



The performance curves are based on the kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	N° IMPELLER	POWER SUPPLY 50 Hz	P1 MAX KW	ELECTRICAL DATA		In A	CAPACITOR	
				P2 NOMINAL			µF	Vc
				kW	HP			
EURO 30/50 M	3	1 x 220 - 240 V ~	0.880	0.55	0.75	3.9	12.5	450
EURO 40/50 M	4	1 x 220 - 240 V ~	1.200	0.75	1	5.3	25	450
EURO 40/50 T		3 x 230 - 240 V ~	1.180	0.75	1	3.8-2.2	-	-
EURO 50/50 M	5	1 x 220 - 240 V ~	1.480	1	1.36	6.3	25	450
EURO 50/50 T		3 x 230 - 400 V ~	1.440	1	1.36	4.4-2.5	-	-

MODEL	A	B	C	E	F	G	I Ø	H	H1	H2	DNA GAS	DNM GAS	PACK DIMENSIONS			VOLUME (mc)	GROSS WEIGHT Kg
													L/A	L/B	H		
EURO 30/50 M	378	175	94.5	180	13.5	111	9	194	179	143.5	1"	1"	440	206	245	0.025	11.7
EURO 40/50 M	452	175	149.5	235	13.5	111	9	204	179	143.5	1"	1"	480	212	265	0.031	15.6
EURO 40/50 T	468	175	149.5	235	13.5	111	9	204	179	143.5	1"	1"	560	240	227	0.031	18
EURO 50/50 M	452	175	149.5	235	13.5	111	9	204	179	143.5	1"	1"	480	212	265	0.031	16.2
EURO 50/50 T	468	175	149.5	235	13.5	111	9	204	179	143.5	1"	1"	560	240	227	0.031	18.5

EURO 80-SELF-PRIMING CENTRIFUGAL ELECTRIC PUMPS FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from 0 °C to +35 °C - Maximum ambient temperature: +40°C

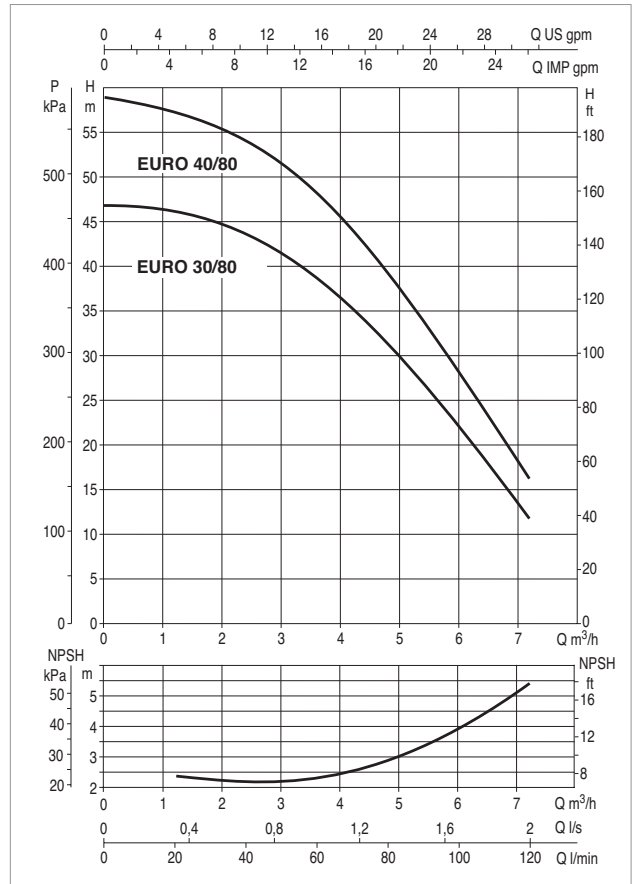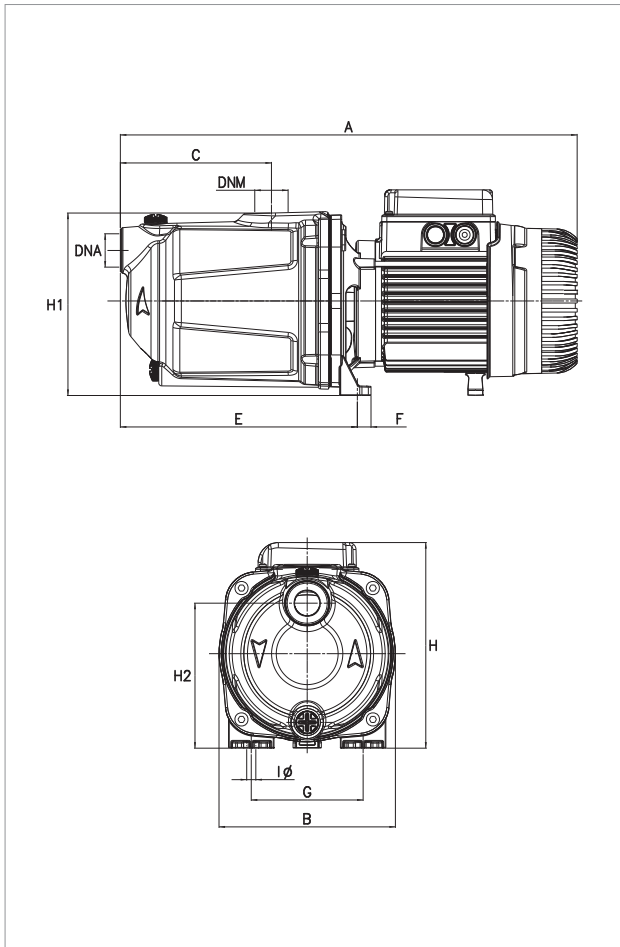

The performance curves are based on the kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	N° IMPELLER	POWER SUPPLY 50 Hz	P1 MAX KW	ELECTRICAL DATA				
				P2 NOMINAL		In A	CAPACITOR	
				kW	HP		µF	Vc
EURO 30/80 M	4	1 x 220 - 240 V ~	1.2	0.8	1.1	5.3	25	450
EURO 30/80 T		3 x 230 - 400 V ~	1.18	0.8	1.1	3.8-2.2	-	-
EURO 40/80 M	5	1 x 220 - 240 V ~	1.48	1	1.36	6.3	25	450
EURO 40/80 T		3 x 230 - 400 V ~	1.44	1	1.36	4.4-2.5	-	-

MODEL	A	B	C	E	F	G	I Ø	H	H1	H2	DNA GAS	DNM GAS	PACK DIMENSIONS			VOLUME (mc)	GROSS WEIGHT Kg
													L/A	L/B	H		
EURO 30/80 M	452	175	149.5	235	13.5	111	9	204	179	143.5	1"	1"	440	212	265	0.031	15.6
EURO 30/80 T	468	175	149.5	235	13.5	111	9	204	179	143.5	1"	1"	560	240	227	0.031	18
EURO 40/80 M	452	175	149.5	235	13.5	111	9	204	179	143.5	1"	1"	480	212	265	0.031	16.3
EURO 40/80 T	468	175	149.5	235	13.5	111	9	204	179	143.5	1"	1"	560	240	227	0.031	18

EUROINOX

MULTISTAGE CENTRIFUGAL PUMPS



TECHNICAL DATA

Operating range:

from 10 to 120 litres/min. with head up to 72 m.

Liquid quality requirements: clean, free from solid or abrasive contaminants, non-viscous, non-aggressive, uncrystallised and chemically neutral, close to the properties of water.

Liquid temperature range: from 0°C to +35°C for domestic use (EN 60335-2-41).

Maximum ambient temperature: +40°C

Maximum operating pressure: 8 bar (800 kPa)

Installation: fixed or portable in a horizontal position.

Motor protection rating: IP 44

Terminal block protection rating: IP 55

Insulation class: F

Standard input voltage: single phase 220/240 V / 50 Hz
three phase 230/400 V - 50 Hz

APPLICATIONS

Multi-stage centrifugal pump with horizontal shaft, with excellent suction capacity even in the presence of air bubbles, featuring extremely quiet operation suitable for domestic water supply and pressurisation, irrigation of gardens and general water movement.

CONSTRUCTIONAL FEATURES OF THE PUMP

Pump body in stainless steel. Motor support in die cast aluminium, with seal holder cover in AISI 304 stainless steel. Carbon/ceramic mechanical seal. Rotor shaft in AISI 304 stainless steel.

Impeller and diffuser bodies and diffuser in technopolymer.

Stainless steel wear ring.

CONSTRUCTIONAL FEATURES OF THE MOTOR

Asynchronous, continuous service motor.


Incorporated thermo-ampereometric protection and permanently inserted capacitor in the single phase version.

Overload protection to be provided by the user for the three-phase version.

MATERIALS

N°	PARTS*	MATERIALS
1	PUMP BODY	AISI 304 STAINLESS STEEL X5CRNI 1810 UNI 6900/71
4	IMPELLER	TECHNOPOLYMER
6	DIFFUSER	TECHNOPOLYMER
7	SHAFT WITH ROTOR	AISI 304 STAINLESS STEEL X5CrNi 1810 UNI 6900/71
16	MECHANICAL SEAL	CARBON/CERAMIC
28	OR GASKET	NBR
36	SEAL HOLDER COVER	AISI 304 STAINLESS STEEL X5CRNI 1810 UNI 6900/71
98	DIFFUSER BODY	TECHNOPOLYMER
304	REAR DISC	TECHNOPOLYMER
305	FRONT DISC	TECHNOPOLYMER

* In contact with liquid

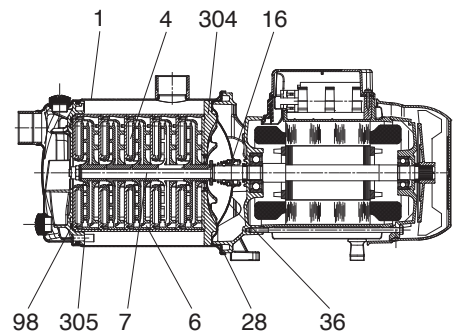


EUROINOX

MULTISTAGE CENTRIFUGAL PUMPS

PERFORMANCE RANGE

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

GRAPHIC SELECTION TABLE


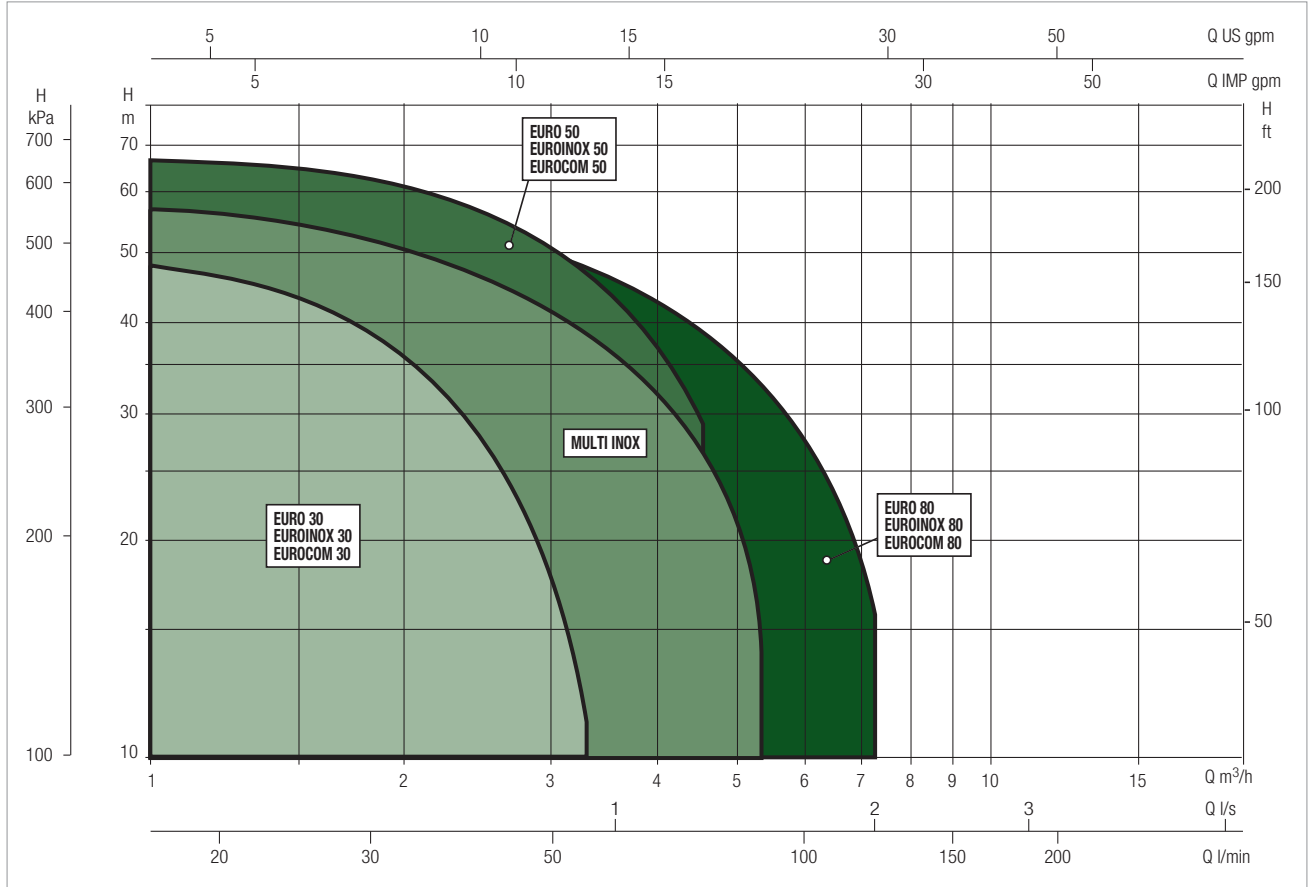


EUROINOX SELECTION TABLE

MODEL	Q=m ³ /h	0	0.6	1.2	1.8	2.4	3.0	3.6	4.2	4.8	6	7.2
	Q=l/min	0	10	20	30	40	50	60	70	80	100	120
EUROINOX 25/30 M	H (m)	34	31.7	28.3	23.5	17.5	11					
EUROINOX 30/30 M		46	42.2	37.8	31.2	23.3	14.3					
EUROINOX 40/30 M		57	52.7	47	38.8	29	17.7					
EUROINOX 30/50 M		42	40.2	38.2	36.2	33.8	30	24.8	19.5	14		
EUROINOX 30/50 T		42	40.2	38.2	36.2	33.8	30	24.8	19.5	14		
EUROINOX 40/50 M		58	55.3	52.8	50.1	47.1	42.7	35.8	28	19		
EUROINOX 40/50 T		58	55.3	52.8	50.1	47.1	42.7	35.8	28	19		
EUROINOX 50/50 M		72	68.5	65.5	62.1	58.2	52.2	43.6	34.5	26		
EUROINOX 50/50 T		72	68.5	65.5	62.1	58.2	52.2	43.6	34.5	26		
EUROINOX 30/80 M		47		46.5	45	43.5	41	38	34.5	31	23	12
EUROINOX 30/80 T		47		46.5	45	43.5	41	38	34.5	31	23	12
EUROINOX 40/80 M		59		57	56	54	51	47	43.5	39	29.5	16.5
EUROINOX 40/80 T		59		57	56	54	51	47	43.5	39	29.5	16.5

EUROINOX 30-SELF-PRIMING CENTRIFUGAL ELECTRIC PUMPS FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from 0 °C to +35 °C - Maximum ambient temperature: +40°C

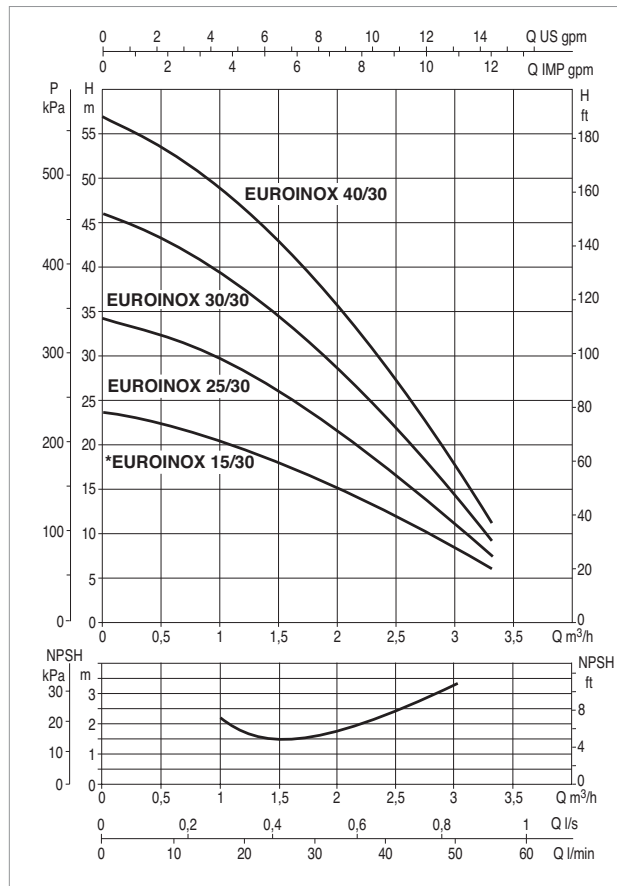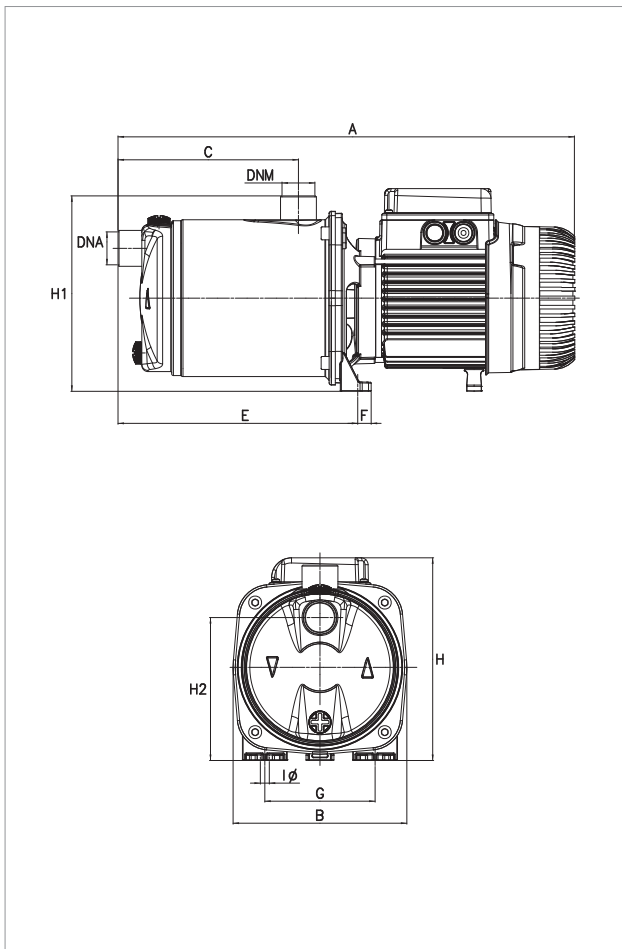

The performance curves are based on the kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.



MODEL	ELECTRICAL DATA							
	N° IMPELLER	POWER SUPPLY 50 Hz	P1 MAX KW	P2 NOMINAL		In A	CAPACITOR	
				kW	HP		µF	Vc
EUROINOX 25/30 M	3	1 x 220 - 240 V ~	0.520	0.37	0.5	2.4	10	450
EUROINOX 30/30 M	4	1 x 220 - 240 V ~	0.760	0.45	0.6	3.2	12.5	450
EUROINOX 40/30 M	5	1 x 220 - 240 V ~	0.880	0.55	0.75	3.9	12.5	450

MODEL	A	B	C	E	F	G	I Ø	H	H1	H2	DNA GAS	DNM GAS	PACK DIMENSIONS			VOLUME (mc)	GROSS WEIGHT Kg
													L/A	L/B	H		
EUROINOX 25/30 M	384	174	108	186	13.5	111	9	193	196	143	1"	1"	440	206	245	0.025	9.7
EUROINOX 30/30 M	439	174	166	241	13.5	111	9	193	196	143	1"	1"	480	212	265	0.031	11.7
EUROINOX 40/30 M	439	174	166	241	13.5	111	9	193	196	143	1"	1"	480	212	265	0.031	11.9

* Available upon request.

EUROINOX 50-SELF-PRIMING CENTRIFUGAL ELECTRIC PUMPS FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from 0 °C to +35 °C - Maximum ambient temperature: +40°C

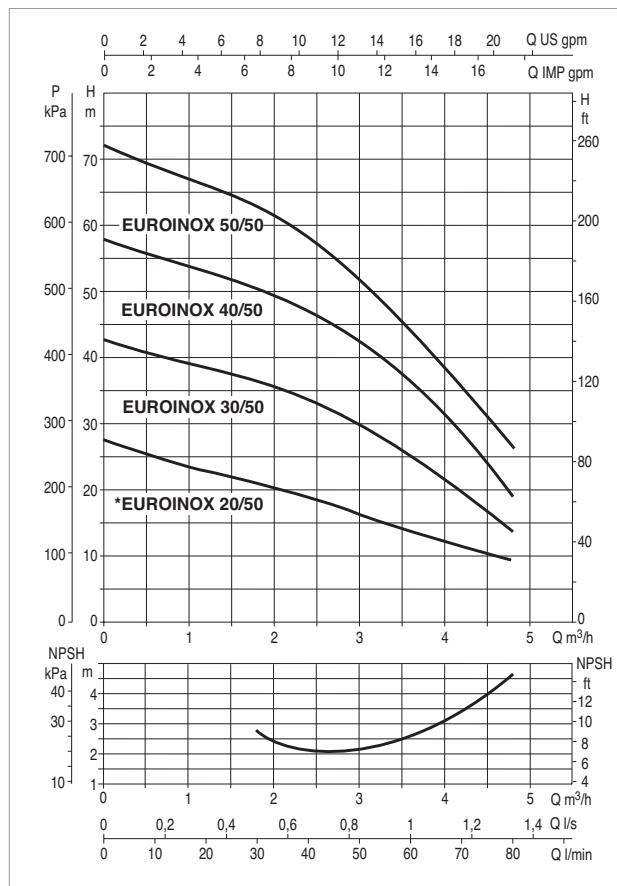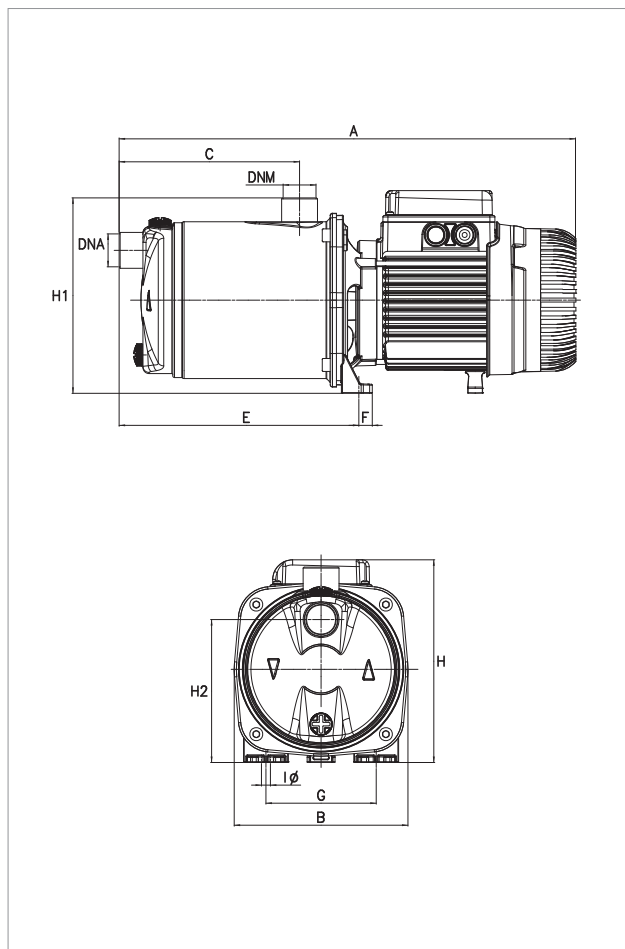



The performance curves are based on the kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	N° IMPELLER	POWER SUPPLY 50 Hz	P1 MAX KW	ELECTRICAL DATA				
				P2 NOMINAL		In A	CAPACITOR	
				kW	HP		µF	Vc
EUROINOX 30/50 M	3	1x220-240 V ~	0.880	0.55	0.75	3.9	12.5	450
EUROINOX 30/50 T		3x230-400V ~	0.870	0.55	0.75	2.8-1.6	-	-
EUROINOX 40/50 M	4	1x220-240 V ~	1.200	0.75	1	5.3	25	450
EUROINOX 40/50 T		3x230-400V ~	1.180	0.75	1	3.8-2.2	-	-
EUROINOX 50/50 M	5	1x220-240 V ~	1.480	1	1.36	6.3	25	450
EUROINOX 50/50 T		3x230-400V ~	1.440	1	1.36	4.4-2.5	-	-

MODEL	A	B	C	E	F	G	I Ø	H	H1	H2	DNA GAS	DNM GAS	PACK DIMENSIONS			VOLUME (mc)	GROSS WEIGHT Kg
													L/A	L/B	H		
EUROINOX 30/50 MT	384	174	108	186	13.5	111	9	193	196	143	1"	1"	440	206	245	0.025	10.7
EUROINOX 40/50 M	458	174	166	241	13.5	111	9	203	196	143	1"	1"	480	212	265	0.031	14.8
EUROINOX 40/50 T	474	174	166	241	13.5	111	9	203	196	143	1"	1"	560	240	227	0.031	14.8
EUROINOX 50/50 M	458	174	166	241	13.5	111	9	203	196	143	1"	1"	480	212	265	0.031	15.5
EUROINOX 50/50 T	474	174	166	241	13.5	111	9	203	196	143	1"	1"	560	240	227	0.031	15.5

EUROINOX 80-SELF-PRIMING MULTISTAGE CENTRIFUGAL PUMPS CENTRIFUGAL ELECTRIC PUMPS FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from 0 °C to +35 °C - Maximum ambient temperature: +40°C

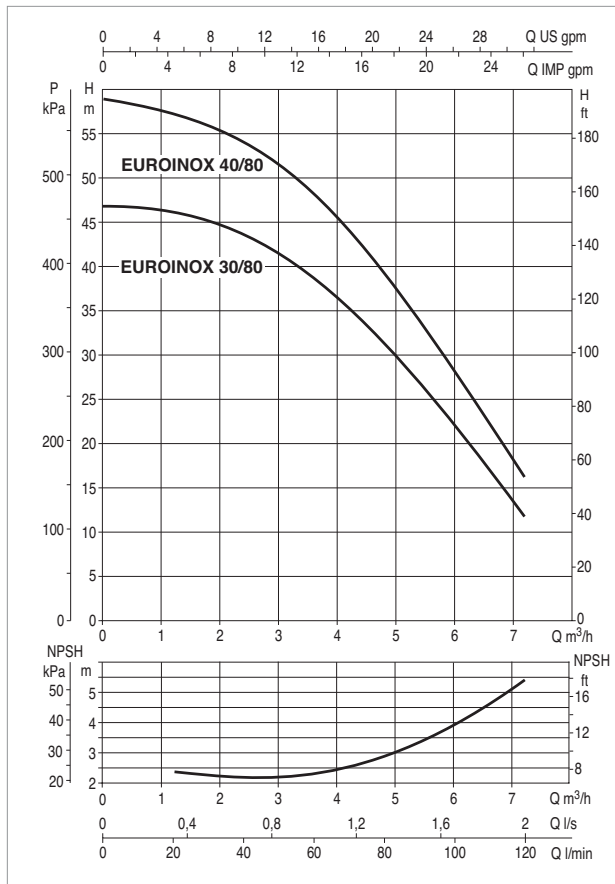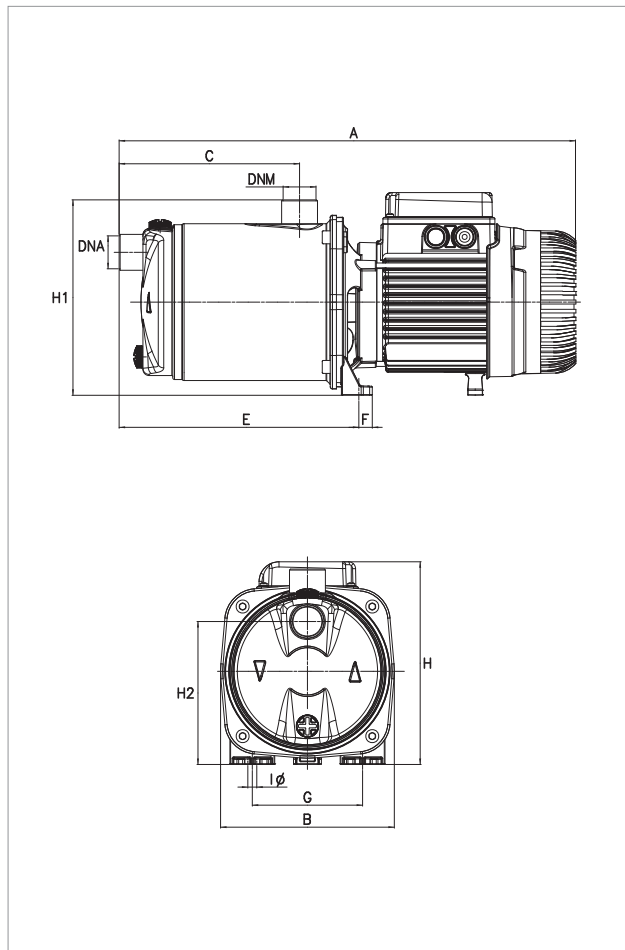

The performance curves are based on the kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	ELECTRICAL DATA							
	N° IMPELLER	POWER SUPPLY 50 Hz	P1 MAX KW	P2 NOMINAL		In A	CAPACITOR	
				kW	HP		µF	Vc
EUROINOX 30/80 M	4	1x220-240 V ~	1.200	0.8	1.1	5.3	25	450
EUROINOX 30/80 T		3x230-400 V ~	1.180	0.8	1.1	3.8-2.2	-	-
EUROINOX 40/80 M	5	1x220-240 V ~	1.480	1	1.36	6.5	25	450
EUROINOX 40/80 T		3x230-400 V ~	1.440	1	1.36	4.4-2.5	-	-

MODEL	A	B	C	E	F	G	I Ø	H	H1	H2	DNA GAS	DNM GAS	PACK DIMENSIONS			VOLUME (mc)	GROSS WEIGHT Kg
													L/A	L/B	H		
EUROINOX 30/80 M	458	174	166	241	13.5	111	9	203	196	143	1"	1"	480	212	265	0.031	14.8
EUROINOX 30/80 T	474	174	166	241	13.5	111	9	203	196	143	1"	1"	560	240	227	0.031	14.8
EUROINOX 40/80 M	458	174	166	241	13.5	111	9	203	196	143	1"	1"	480	212	265	0.031	15.5
EUROINOX 40/80 T	474	174	166	241	13.5	111	9	203	196	143	1"	1"	560	240	227	0.031	15.5

EUROCOM

MULTISTAGE CENTRIFUGAL PUMPS



TECHNICAL DATA

Operating range:

from 10 to 120 litres/min. with head up to 72 m.

Liquid quality requirements: clean, free from solid or abrasive contaminants, non-viscous, non-aggressive, uncrystallised and chemically neutral, close to the properties of water.

Liquid temperature range:

for domestic use: from 0°C to +35°C (EN 60335-2-41)

for other use: from 0°C to +40°C

Maximum ambient temperature: +40°C

Maximum operating pressure: 6 bar (600 kPa)

Installation: fixed or portable in a horizontal position.

Motor protection rating: IP 44

Terminal block protection rating: IP 55

Insulation class: F

Standard input voltage: single phase 220/240 V - 50 Hz

three phase 230/400 V - 50 Hz

APPLICATIONS

Multi-stage centrifugal pump with horizontal shaft, featuring extremely quiet operation suitable for domestic water supply and pressurisation, irrigation of gardens and general water movement.

CONSTRUCTIONAL FEATURES OF THE PUMP

Pump body in technopolymer. Motor support in die cast aluminium, with seal holder cover in AISI 304 stainless steel. Carbon/ceramic mechanical seal. Rotor shaft in AISI 304 stainless steel. Impeller and diffuser bodies and diffuser in technopolymer. Stainless steel wear ring.

CONSTRUCTIONAL FEATURES OF THE MOTOR

Asynchronous, continuous service motor.


Incorporated thermo-amperometric protection and permanently inserted capacitor in the single phase version.

Overload protection to be provided by the user for the three-phase version.

MATERIALS

N°	PARTS*	MATERIALS
1	PUMP BODY	TECHNOPOLYMER
4	IMPELLER	TECHNOPOLYMER
6	DIFFUSER	TECHNOPOLYMER
7	SHAFT WITH ROTOR	AISI 304 STAINLESS STEEL X5CrNi 1810 UNI 6900/71
16	MECHANICAL SEAL	CARBON/CERAMIC
28	OR GASKET	NBR
36	SEAL HOLDER COVER	AISI 304 STAINLESS STEEL X5CRNI 1810 UNI 6900/71
98	DIFFUSER BODY	TECHNOPOLYMER
304	REAR DISC	TECHNOPOLYMER


* In contact with liquid

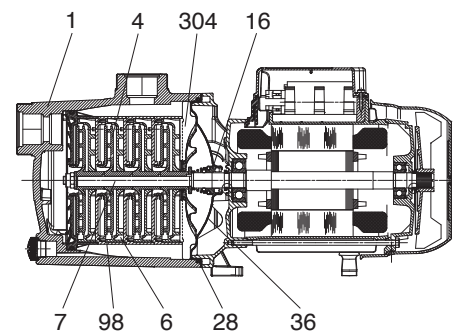

PERFORMANCE RANGE

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

GRAPHIC SELECTION TABLE


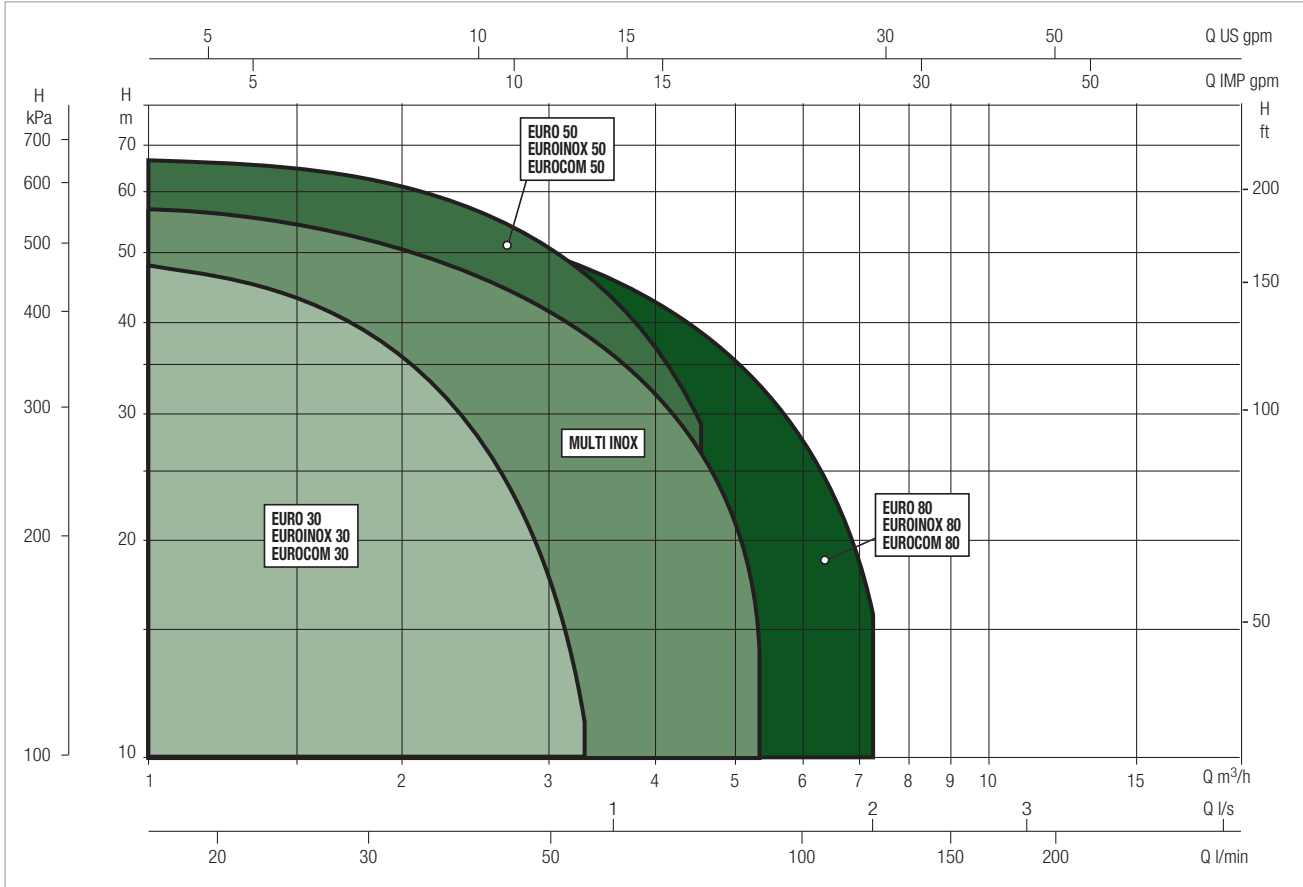


EUROCOM SELECTION TABLE

MODEL	Q=m ³ /h	0	0.6	1.2	1.8	2.4	3.0	3.6	4.2	4.8	6	7.2
	Q=l/min	0	10	20	30	40	50	60	70	80	100	120
EUROCOM 25/30 M	H (m)	34.4	31.7	28.3	23.5	17.5	11					
EUROCOM 30/50 M		42.2	40.2	38.2	36.2	33.8	30	24.8	19.5	14		
EUROCOM 40/50 M		57.7	55.3	52.8	50.1	47.1	42.7	35.8	28	19.2		
EUROCOM 40/50 T		57.7	55.3	52.8	50.1	47.1	42.7	35.8	28	19.2		
EUROCOM 30/80 T		47		46.5	45	43.5	41	38	34.5	31	23	12

EUROCOM 30-SELF-PRIMING MULTISTAGE CENTRIFUGAL PUMPS CENTRIFUGAL ELECTRIC PUMPS FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from 0 °C to +35 °C - Maximum ambient temperature: +40°C

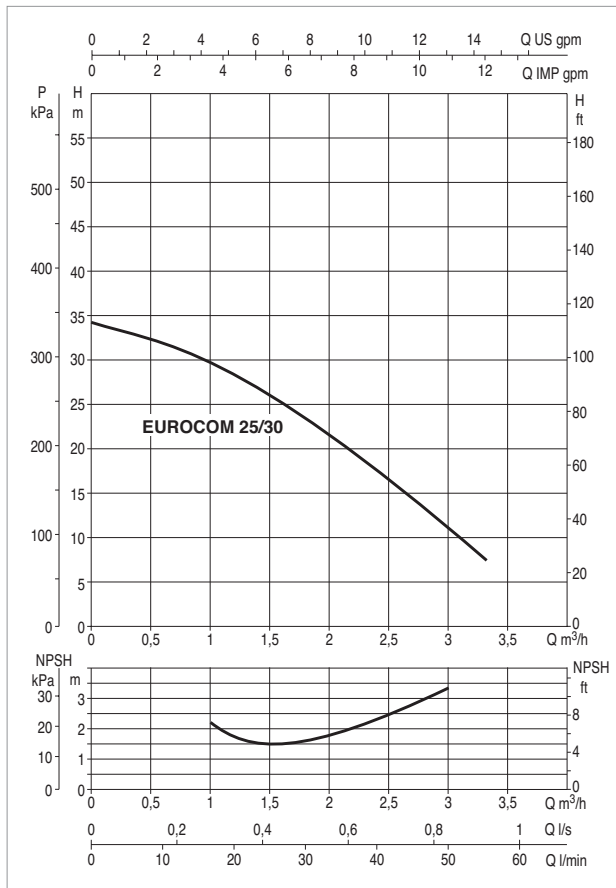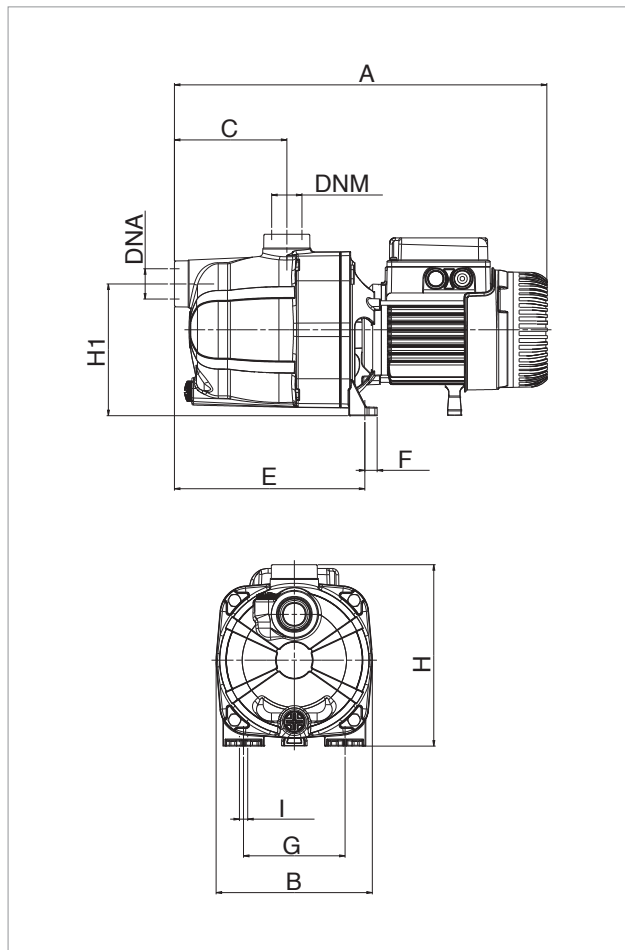



The performance curves are based on the kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	N° IMPELLER	POWER SUPPLY 50 Hz	P1 MAX KW	ELECTRICAL DATA				
				P2 NOMINAL		In A	CAPACITOR	
				kW	HP		µF	Vc
EUROCOM 25/30 M	3	1x220-240V ~	0.52	0.37	0.5	2.4	10	450

MODEL	A	B	C	E	F	G	I Ø	H	H1	H2	DNA GAS	DNM GAS	PACK DIMENSIONS			VOLUME (mc)	GROSS WEIGHT Kg	
													L/A	L/B	H		M	T
EUROCOM 25/30 M	406	170	122	208	14	111	9	198	144	-	1"	1"	470	240	240	0.027	8	8

EUROCOM 50-SELF-PRIMING MULTISTAGE CENTRIFUGAL PUMPS CENTRIFUGAL ELECTRIC PUMPS FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from 0 °C to +35 °C - Maximum ambient temperature: +40°C

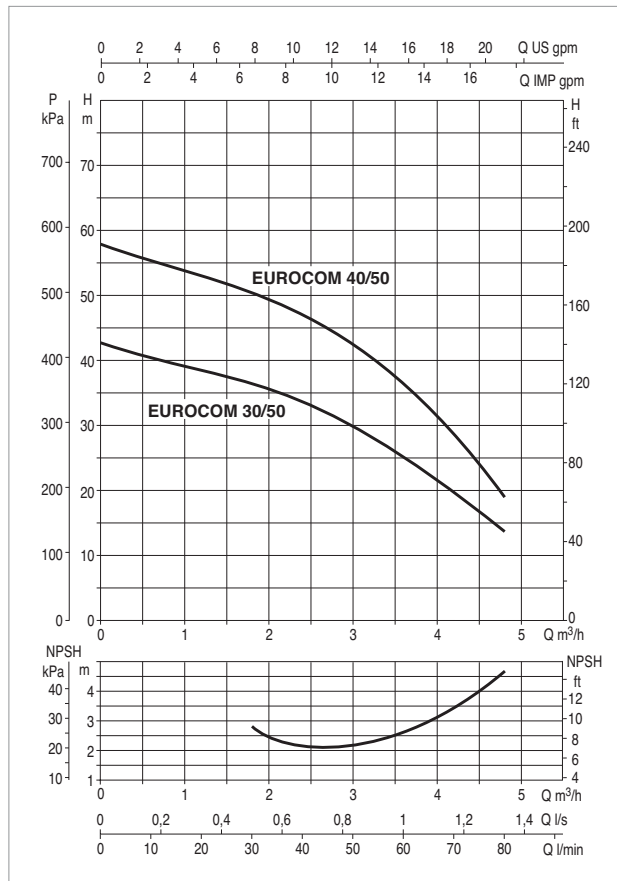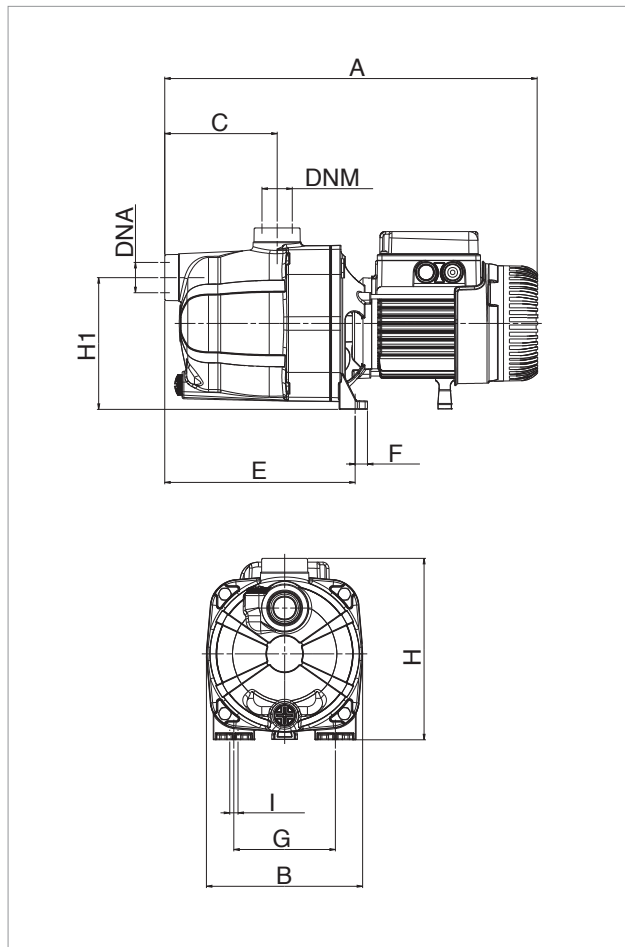



The performance curves are based on the kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	N° IMPELLER	POWER SUPPLY 50 Hz	P1 MAX KW	ELECTRICAL DATA				
				P2 NOMINAL		In A	CAPACITOR	
				kW	HP		µF	Vc
EUROCOM 30/50 M	3	1x220-240 V ~	0.88	0.55	0.75	3.9	12.5	450
EUROCOM 40/50 M	4	1x220-240 V ~	1.2	0.75	1	5.3	25	450
EUROCOM 40/50 T		3x230-400 V ~	1.18	0.75	1	3.8-2.2	-	-

MODEL	A	B	C	E	F	G	I Ø	H	H1	H2	DNA GAS	DNM GAS	PACK DIMENSIONS			VOLUME (mc)	GROSS WEIGHT Kg
													L/A	L/B	H		
EUROCOM 30/50 M	406	170	122	208	14	111	9	198	144	-	1"	1"	470	240	240	0.027	8.8
EUROCOM 40/50 M	406	170	122	208	14	111	9	203	144	-	1"	1"	470	240	240	0.027	11
EUROCOM 40/50 T	422	170	122	208	14	111	9	203	144	-	1"	1"	470	240	240	0.027	12.5

EUROCOM 80-SELF-PRIMING MULTISTAGE CENTRIFUGAL PUMPS CENTRIFUGAL ELECTRIC PUMPS FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from 0 °C to +35 °C - Maximum ambient temperature: +40°C

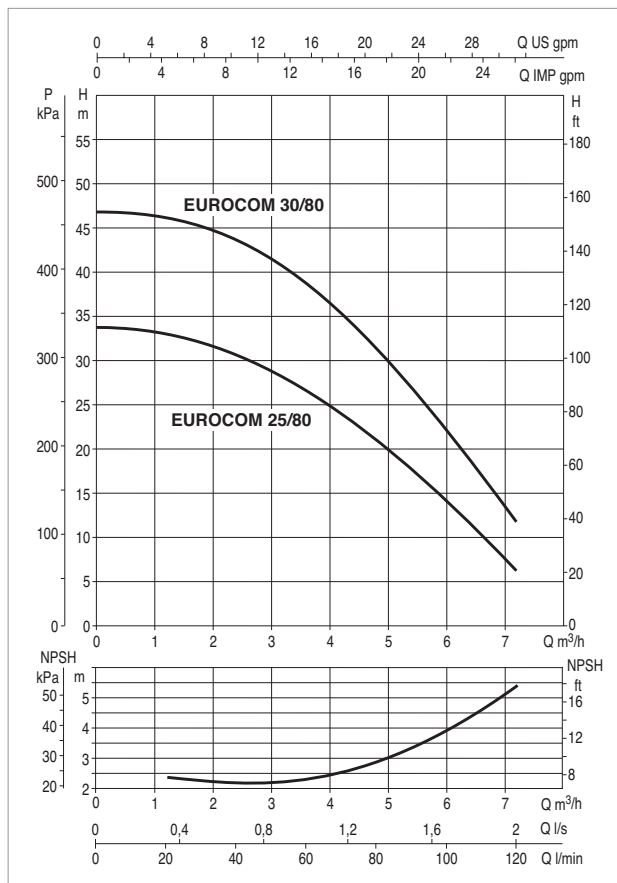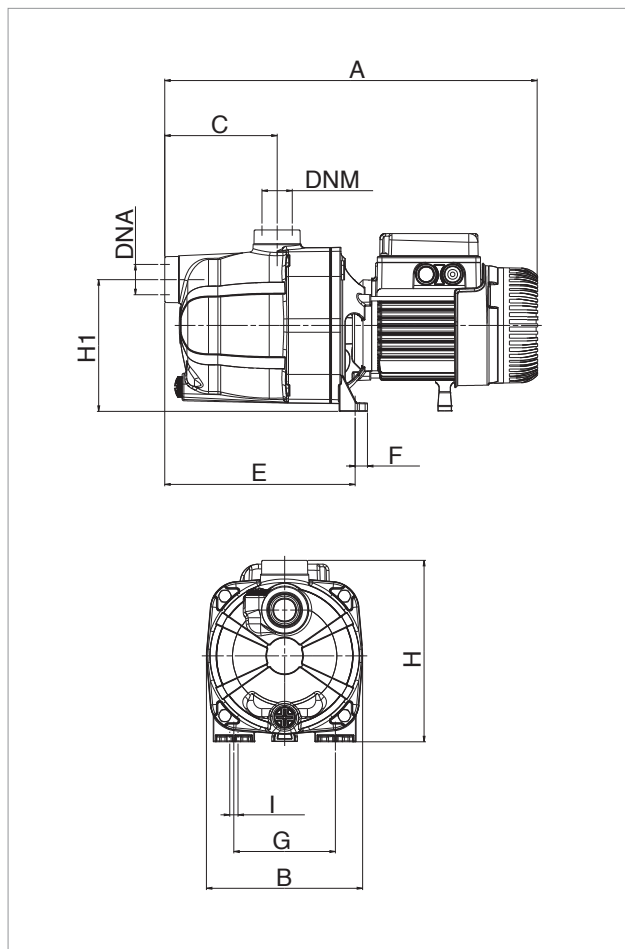

The performance curves are based on the kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	ELECTRICAL DATA							
	N° IMPELLER	POWER SUPPLY 50 Hz	P1 MAX KW	P2 NOMINAL		In A	CAPACITOR	
				kW	HP		µF	Vc
EUROCOM 30/80 T	4	3x230-400V ~	1.04	0.8	1.1	3.3-1.9	-	-

MODEL	A	B	C	E	F	G	I Ø	H	H1	H2	DNA GAS	DNM GAS	PACK DIMENSIONS			VOLUME (mc)	GROSS WEIGHT Kg	
													L/A	L/B	H		M	T
EUROCOM 30/80 T	425	170	122	208	14	111	9	203	144	-	1"	1"	470	240	240	0.027	11	11.3

MULTI INOX

SELF-PRIMING, MULTISTAGE HORIZONTAL ELECTRIC PUMPS



TECHNICAL DATA

Operating range:

capacity up to 90 l/min; head up to 59 m.

Liquid temperature range:

for domestic use: from +35°C to +35°C

for other use: from 0°C to +40°C

Liquid quality requirements: clean, free from solid or abrasive contaminants, non-viscous, non-aggressive, uncrystallised and chemically neutral.

Maximum suction depth: 8 metres

Maximum ambient temperature: +40°C

Protection rating: IPX4

Insulation class: F

Installation: fixed or portable in a horizontal position.

Special executions on request: alternative voltages and/or frequencies.

APPLICATIONS

Multi-stage, self priming centrifugal pump with horizontal shaft, with excellent suction capacity even in the presence of air bubbles, featuring extremely quiet operation suitable for domestic water supply and pressurisation, irrigation of gardens and general water movement.


FEATURES

Pump sleeve in stainless steel. Pressure and suction body and motor support in technopolymer. Impeller in AISI 304 stainless steel, diffuser bodies and diffuser in technopolymer. Carbon/ceramic mechanical seal. Rotor shaft in AISI 304 stainless steel. Single phase, asynchronous, continuous service motor. Incorporated thermo-amperometric protection and permanently inserted capacitor.

MATERIALS

N°	PARTS*	MATERIALS
1	SUCTION FLANGE	TECHNOPOLYMER
2	INSERT	NICKLED BRASS
3	NUT	A2 – UNI7474 STAINLESS STEEL
4	WASHER	A2 STAINLESS STEEL
5	OR GASKET	NBR
6	COUNTERFLANGE	TECHNOPOLYMER
7	OR GASKET	NBR
8	DIFFUSER	TECHNOPOLYMER
9	IMPELLER	TECHNOPOLYMER
10	ROTOR SHAFT	AISI 416 STAINLESS STEEL UNI EN 10088-1 X12CrS13
11	WASHER	A2 STAINLESS STEEL
12	SEEGER RING	AISI 316 STAINLESS STEEL
13	MECHANICAL SEAL	SILICON - VITON
14	COUNTERFACE	STEA/NBR
15	BODY	TECHNOPOLYMER
16	INSERT	NICKLED BRASS

* In contact with liquid

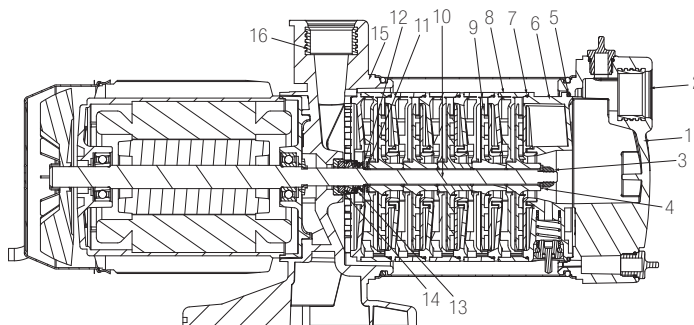


MULTI INOX

SELF-PRIMING, MULTISTAGE HORIZONTAL ELECTRIC PUMPS

PERFORMANCE RANGE

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

GRAPHIC SELECTION TABLE


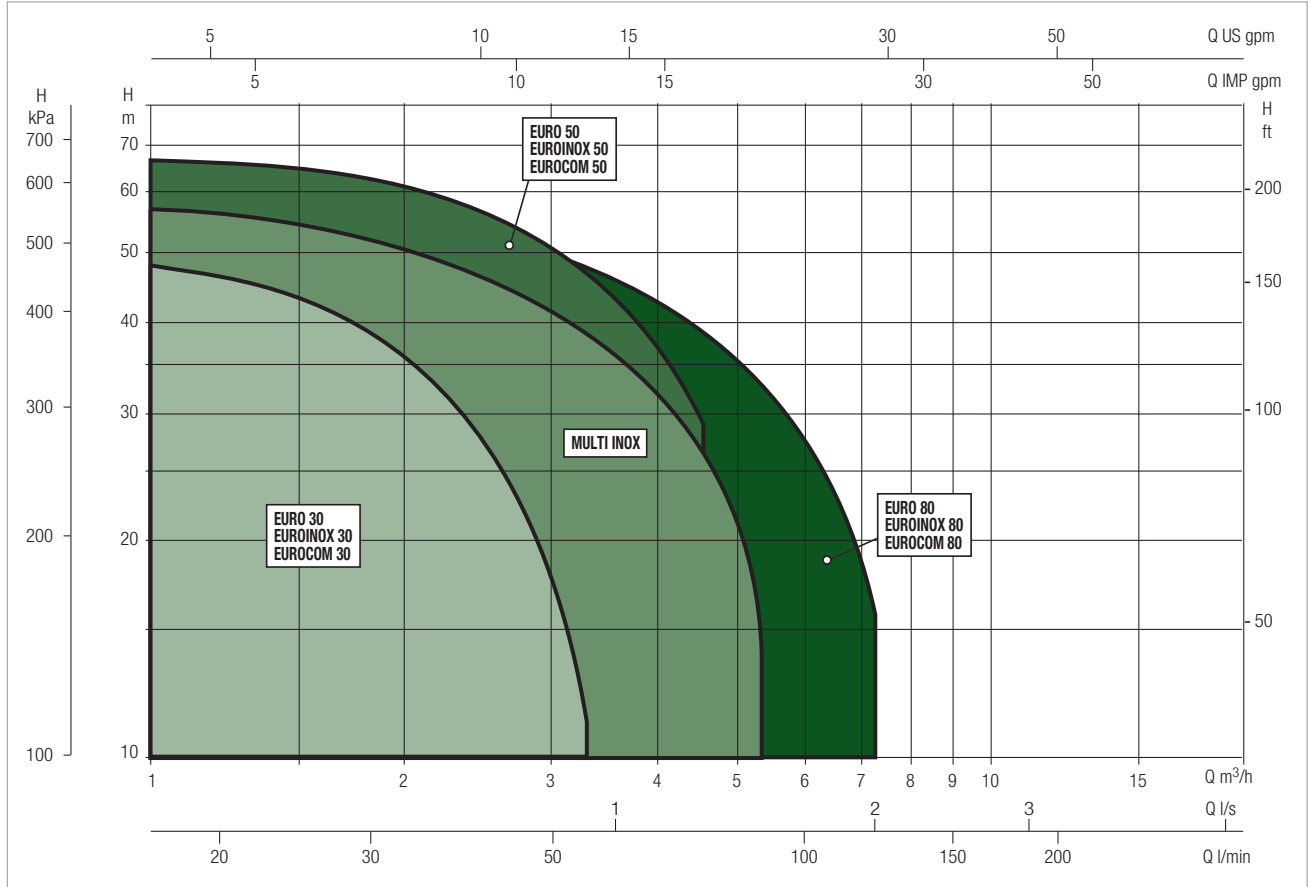


MULTI INOX SELECTION TABLE

MODEL	Q=m ³ /h	0	0.6	1.2	1.8	2.4	3.0	3.6	4.2	4.8	5.4
	Q=l/min	0	10	20	30	40	50	60	70	80	90
MULTI INOX 3 M	H (m)	33	32	30	29	27	22	19	14	10	5
MULTI INOX 4 M		46	45	43	40	38	33	28	22	16	9
MULTI INOX 5 M		59	58	56	53	49	45	38	32	25	13

MULTI INOX - SELF-PRIMING MULTI-STAGE, HORIZONTAL ELECTRIC PUMPS FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from 0 °C to +35 °C - Maximum ambient temperature: +40°C

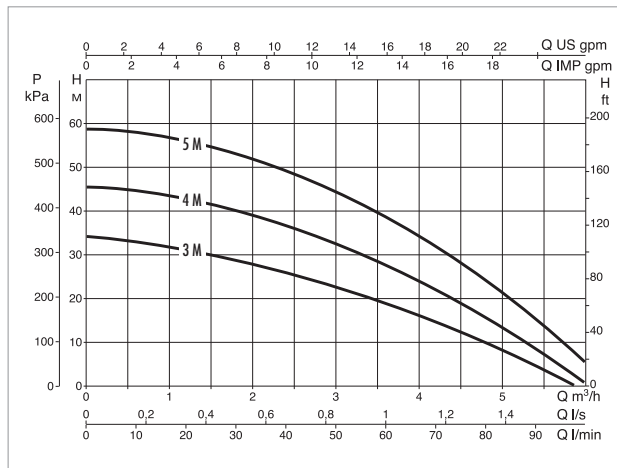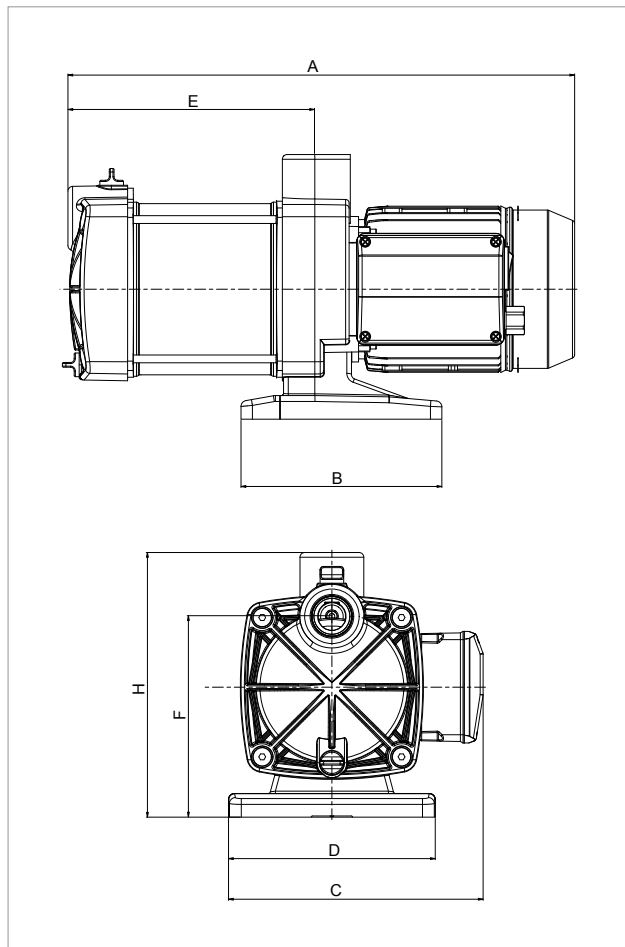


The performance curves are based on the kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	ELECTRICAL DATA							
	N° IMPELLER	POWER SUPPLY 50 Hz	P1 MAX KW	P2 NOMINAL		In A	CAPACITOR	
				kW	HP		µF	Vc
MULTI INOX 3 M	3	1x220-240 V ~	0.80	0.55	0.75	3.7	12.5	450
MULTI INOX 4 M	4	1x220-240 V ~	1.00	0.75	1	4.5	16	450
MULTI INOX 5 M	5	1x220-240 V ~	1.25	1	1.36	5.5	20	450

MODEL	A	B	C	D	E	F	H	DNA GAS	DNM GAS	PACK DIMENSIONS			GROSS Kg
										L/A	L/B	H	
MULTI INOX 3 M	380	170	215	175	184	170	220	1"	1"	460	230	270	8.8
MULTI INOX 4 M	430	170	215	175	209	170	220	1"	1"	460	230	270	11.3
MULTI INOX 5 M	455	170	215	175	234	170	220	1"	1"	460	230	270	12.5

JET - JET INOX - EUROINOX M-P

PREPARED CENTRIFUGAL ELECTRIC PUMPS

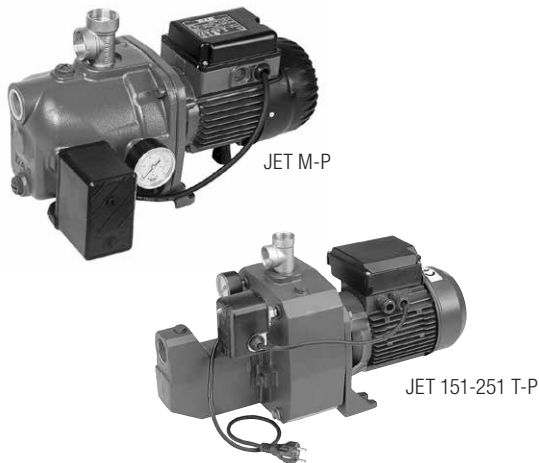

TECHNICAL DATA

Operating range:

from 0.4 to 10.5 m³/h with head up to 62 metres.

Liquid quality requirements: clean, free from solid or abrasive contaminants, non-viscous, non-aggressive, uncrystallised and chemically neutral, close to the properties of water.

Liquid temperature range: from 0°C to +35°C for domestic use (EN 60335-2-41). For other use: from 0°C to +40°C

Maximum ambient temperature: +40°C

Maximum operating pressure: 8 bar (800 kPa)

Installation: fixed in a horizontal position.

Special executions on request: different frequencies and/or voltage.

Motor protection rating: IP 44

Terminal block protection rating: IP 55

Insulation class: F

Standard input voltage: single phase 220/240 V / 50 Hz
three phase 230/400 V - 50 Hz

APPLICATIONS

Self priming centrifugal pump with excellent suction capacity even in the presence of air bubbles.

Suitable for pumping water with low levels of sandy impurities. Especially used in domestic water supply installations. Suitable for small farms and gardening, small scale industrial services and where self priming is necessary.

CONSTRUCTIONAL FEATURES OF THE PUMP

Pump body in cast iron for jet pumps and in stainless steel for the jetinox and euroinox pumps

Motor support in die cast aluminium.

Impeller, diffuser, venturi tube and sand guard in technopolymer

Stainless steel wear ring.

Carbon/ceramic mechanical seal.

SINGLE PHASE VERSION: electric pump set up with pressure gauge, pressure switch, power cord with plug and three-way brass fitting for use when connecting to a tank

THREE-PHASE VERSION: electric pump set up with pressure gauge, pressure switch, remote overload protection and three-way brass fitting for use when connecting to a tank


CONSTRUCTIONAL FEATURES OF THE MOTOR

Asynchronous type, closed, with external air cooling. Rotor mounted on oversized greased-for-life ball bearings, to guarantee low noise and long life. Incorporated thermo-ampereometric protection and permanently inserted capacitor in the single phase version. It is recommended to use overload protection for three phase motor protection, in compliance with current legislation. Manufactured pursuant to CEI 2-3 and CEI 61-69 (EN 60335-2-41).

MATERIALS







N°	PARTS *	MATERIALS
1	PUMP BODY	200 UNI ISO 185 CAST IRON (FOR JET) AISI 304 STAINLESS STEEL (FOR JETINOX AND EUROINOX)
3	FRAME	DIE CAST ALUMINIUM
4	IMPELLER	TECHNOPOLYMER A
7	SHAFT WITH ROTOR	AISI 416 STAINLESS STEEL X12 CrS13 - UNI 6900/71
16	MECHANICAL SEAL	CARBON/CERAMIC
28	OR GASKET	NBR RUBBER
160	VENTURI DIFFUSER NOZZEL GROUP	TECHNOPOLYMER A

* In contact with liquid

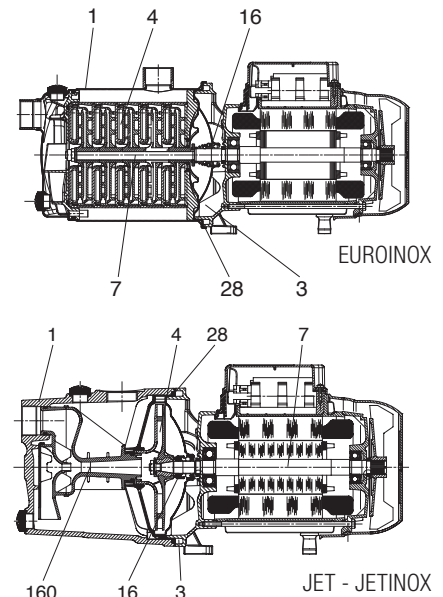

JET 62-82-102-112-132-MP - CENTRIFUGAL ELECTRIC PUMPS FOR DOMESTIC WATER SUPPLY

LIQUID TEMPERATURE RANGE PUMPED: FROM 0 °C TO +35 °C - MAXIMUM AMBIENT TEMPERATURE: +40°C

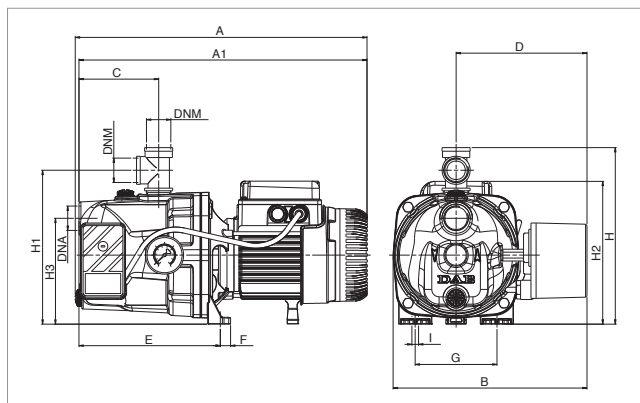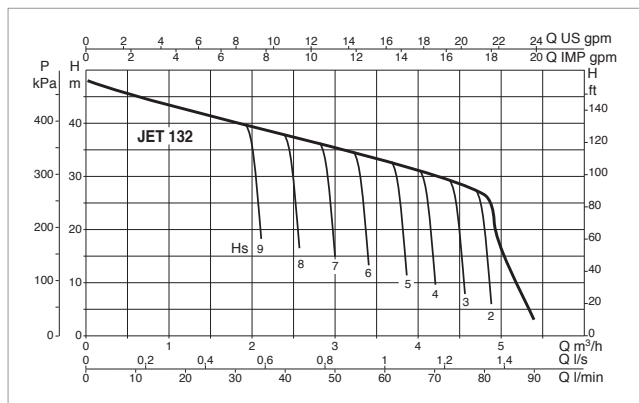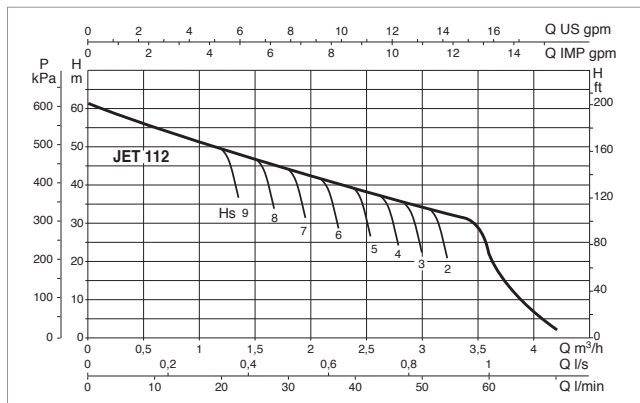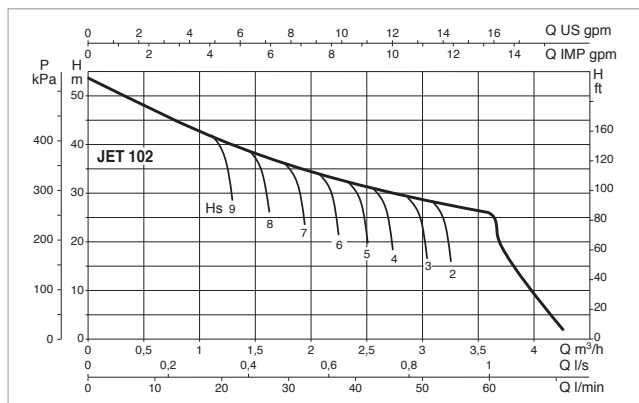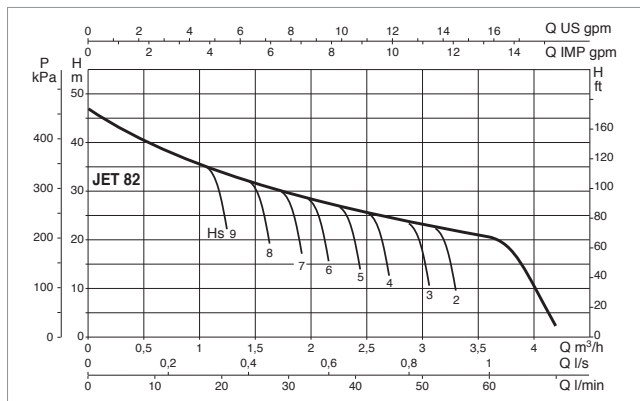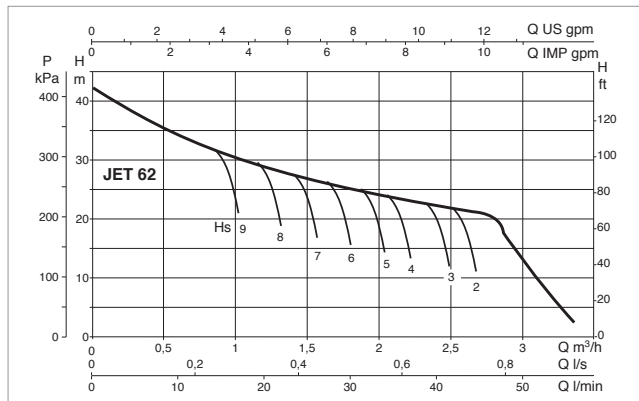





The performance curves are based on kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	ELECTRICAL DATA						
	POWER SUPPLY 50 Hz	P1 MAX KW	P2 NOMINAL		I _n A	CAPACITOR	
			kW	HP		μF	Vc
JET 62 MP	1x220-400V ~	0.72	0.44	0.6	3.12	12.5	450
JET 82 MP	1x220-400V ~	0.85	0.6	0.8	3.8	12.5	450
JET 102 MP	1x220-400V ~	1.13	0.75	1	5.1	16	450
JET 112 MP	1x220-400V ~	1.4	1	1.36	6.2	25	450
JET 132 MP	1x220-400V ~	1.49	1	1.36	6.6	25	450


MODEL	A	A1	B	C	D	E	F	G	I Ø	H	H1	H2	H3	I Ø	DNA GAS	DNM GAS	PACK DIMENSIONS			VOLUME (mc)	GROSS WEIGHT Kg
																	L/A	L/B	H		
JET 62 MP	395	390	263	108	177	192	14	111	-	239	209	193	144	9	1"	1"	440	295	235	0.031	11.9
JET 82 MP	395	390	263	108	177	192	14	111	-	239	209	193	144	9	1"	1"	440	295	235	0.031	12.1
JET 102 MP	414	390	263	108	177	192	14	111	-	239	209	203	144	9	1"	1"	440	295	235	0.031	13.9
JET 112 MP	414	390	263	108	177	192	14	111	-	239	209	203	144	9	1"	1"	440	295	235	0.031	14.9
JET 132 MP	414	390	263	108	177	192	14	111	-	239	209	203	144	9	1"	1"	440	295	235	0.031	14.9

JET 200-300-151-251-MP - CENTRIFUGAL ELECTRIC PUMPS FOR DOMESTIC WATER SUPPLY

LIQUID TEMPERATURE RANGE PUMPED: FROM 0 °C TO +35 °C - MAXIMUM AMBIENT TEMPERATURE: +40°C

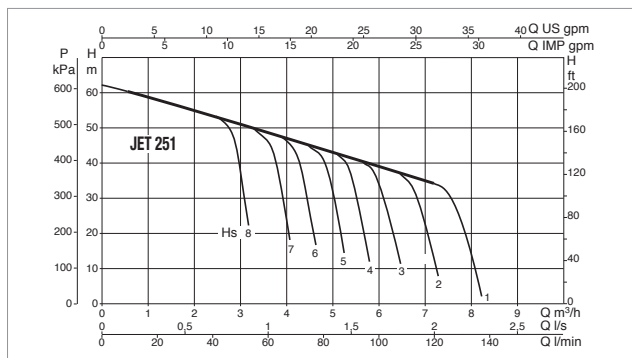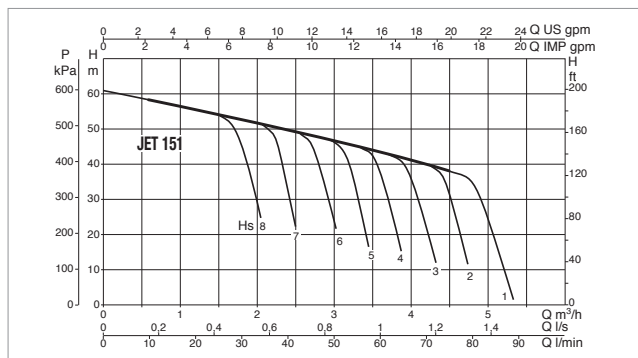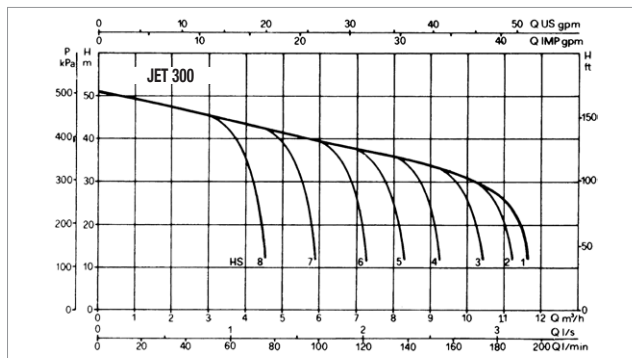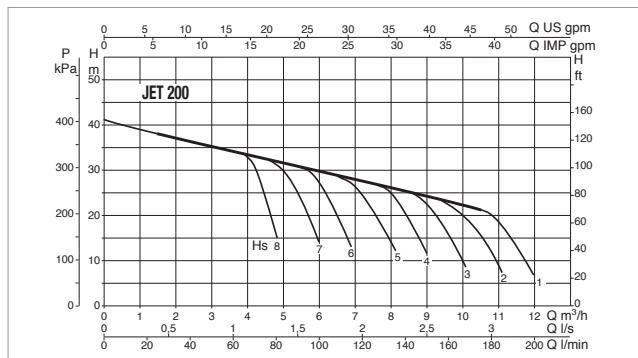

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.




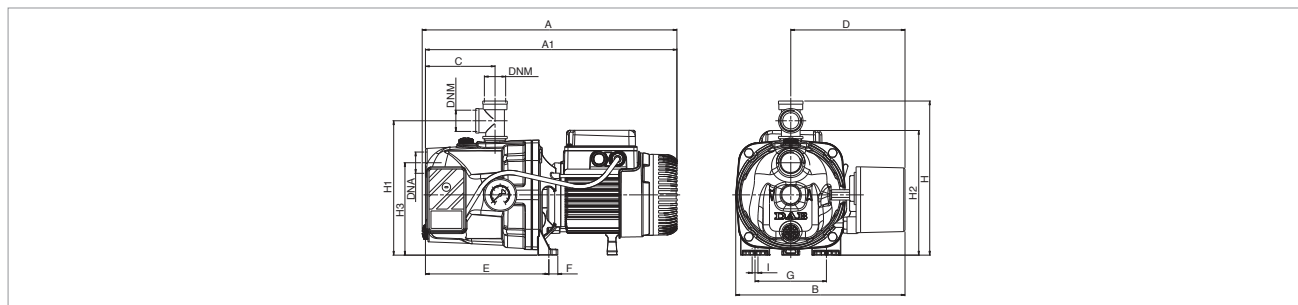


MODEL	ELECTRICAL DATA						
	POWER SUPPLY 50 Hz	P1 MAX KW	P2 NOMINAL		In A	CAPACITOR	
			kW	HP		µF	Vc
JET 200 MP	1x220-240 V ~	2	1.5	2	9	31.5	450
JET 200 TP	3x400 V ~	2	1.5	2	3.9	-	-
JET 300 MP	1x220-240 V ~	2.7	2.2	3	12	40	450
JET 300 TP	3x400 V ~	2.7	2.2	3	8.5-4.9	-	-
JET 151 MP	1x220-240 V ~	1.6	1.1	1.5	7.2	31.5	450
JET 151 TP	3x400 V ~	1.6	1.1	1.5	5.2-3	-	-
JET 251 MP	1x220-240 V ~	2.2	1.85	2.5	10	40	450
JET 251 TP	3x400 V ~	2.2	1.85	2.5	6.9-4	-	-


MODEL	A	A1	B	C	D	E	F	G	I Ø	H	H1	H2	H3	I	DNA GAS	DNM GAS	PACK DIMENSIONS			VOLUME (mc)	GROSS WEIGHT Kg
																	L/A	L/B	H		
																	JET 200 MP	521	-		
JET 200 TP	521	-	294	151	-	282	20	160	11	275	175	-	-	11	1 1/2"	1 1/4"	600	236	267	0.038	28
JET 300 MP	595	-	294	151	-	282	20	160	11	275	175	-	-	11	1 1/2"	1 1/4"	660	236	267	0.042	31.5
JET 300 TP	521	-	294	151	-	282	20	160	11	275	175	-	-	11	1 1/2"	1 1/4"	600	236	267	0.038	30
JET 151 MP	558	-	290	220	-	367	15	145	11	305	165	-	-	11	1 1/4"	1"	600	236	267	0.038	31.5
JET 151 TP	558	-	290	220	-	367	15	145	11	305	165	-	-	11	1 1/4"	1"	600	236	267	0.038	33
JET 251 MP	632	-	290	220	-	367	15	145	11	305	165	-	-	11	1 1/4"	1"	645	236	267	0.040	36
JET 251 TP	558	-	290	220	-	367	15	145	11	305	165	-	-	11	1 1/4"	1"	600	236	267	0.038	34

JETINOX 82-102 -112 -132-MP - CENTRIFUGAL ELECTRIC PUMPS FOR DOMESTIC WATER SUPPLY

LIQUID TEMPERATURE RANGE PUMPED: FROM 0 °C TO +35 °C - MAXIMUM AMBIENT TEMPERATURE: +50°C

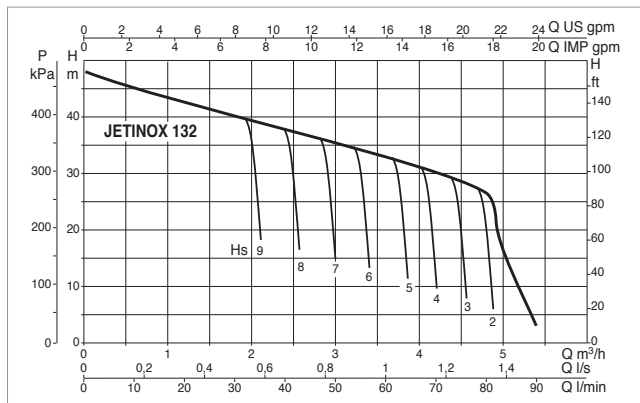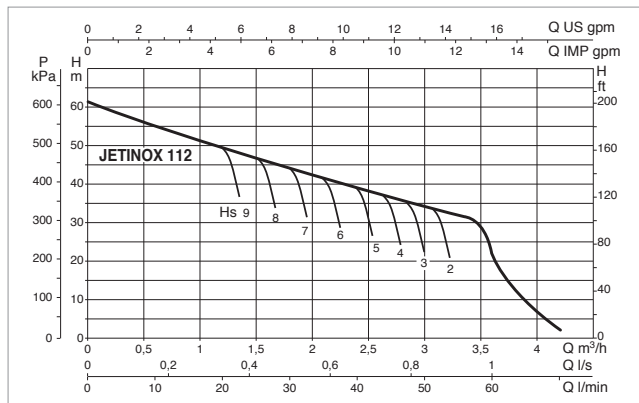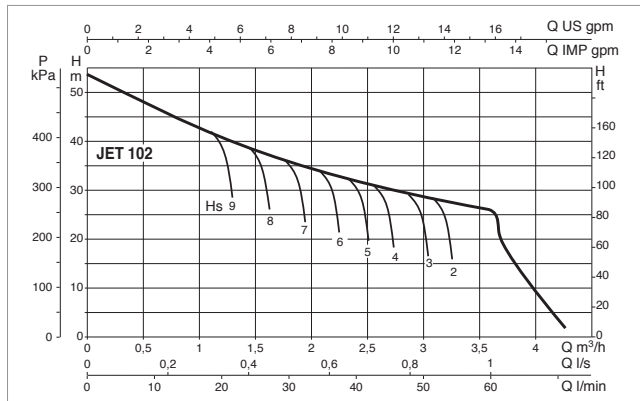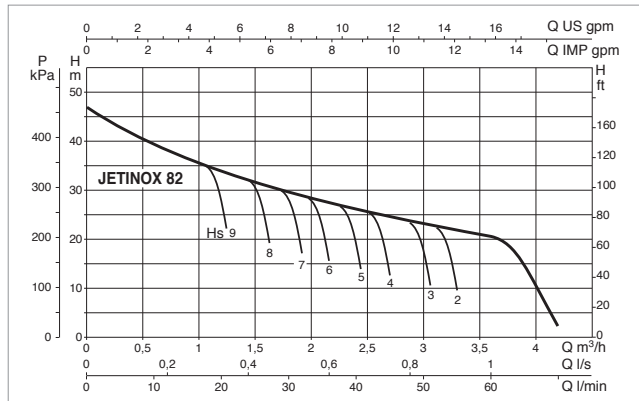

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.




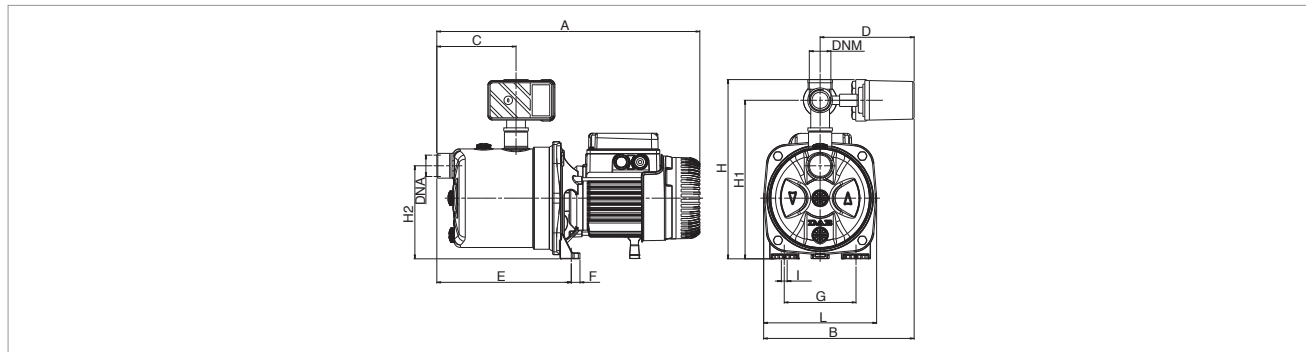


MODEL	ELECTRICAL DATA						
	POWER SUPPLY 50 Hz	P1 MAX KW	P2 NOMINAL		In A	CAPACITOR	
			kW	HP		µF	Vc
JETINOX 82 MP	1x220-240 V ~	0.85	0.6	0.8	3.8	12.5	450
JETINOX 102 MP	1x220-240 V ~	1.13	0.75	1	5.1	16	450
JETINOX 112 MP	1x220-240 V ~	1.4	1	1.36	6.2	25	450
JETINOX 132 MP	1x220-240 V ~	1.49	1	1.36	6.6	25	450

MODEL	A	B	C	D	E	F	G	H	H1	H2	I	L	DNA GAS	DNM GAS	PACK DIMENSIONS			VOLUME (mc)	GROSS WEIGHT Kg
															L/A	L/B	H		
JETINOX 82 MP	406	232	122	145	207	14	111	276	244	144	9	174	1"	1"	450	276	320	0.031	13.6
JETINOX 102 MP	424	232	122	145	207	14	111	276	244	144	9	174	1"	1"	450	276	320	0.031	14.8
JETINOX 112 MP	424	232	122	145	207	14	111	276	244	144	9	174	1"	1"	450	276	320	0.031	15.8
JETINOX 132 MP	424	232	122	145	207	14	111	276	244	144	9	174	1"	1"	450	276	320	0.031	15.8

EUROINOX 30-50-80-MP -CENTRIFUGAL ELECTRIC PUMPS FOR DOMESTIC WATER SUPPLY

LIQUID TEMPERATURE RANGE PUMPED: FROM 0 °C TO +35 °C - MAXIMUM AMBIENT TEMPERATURE: +40°C

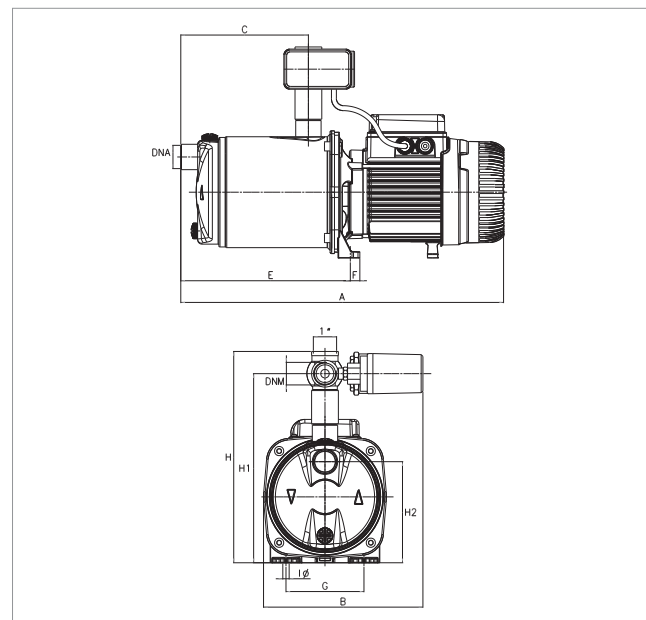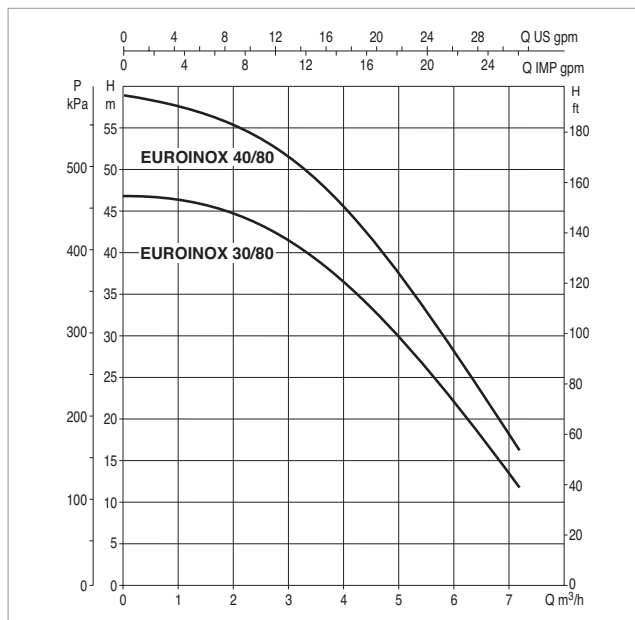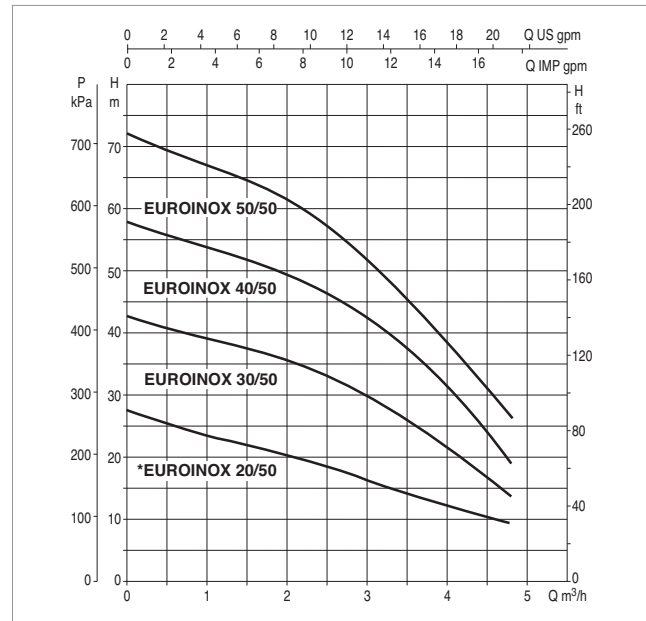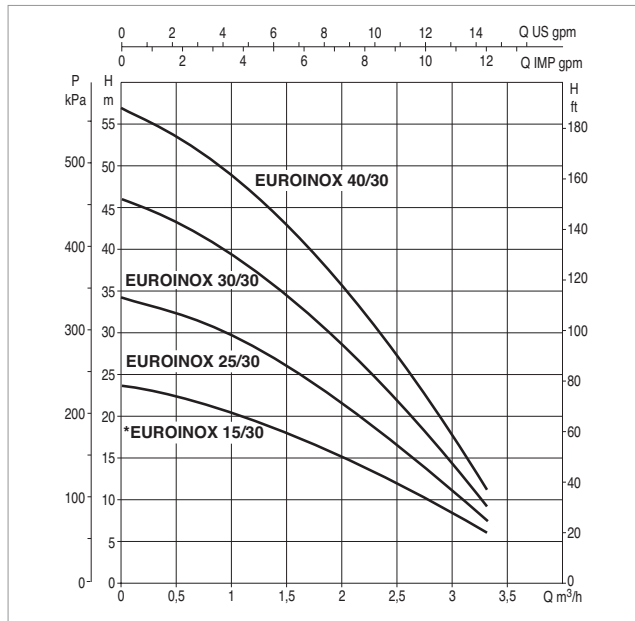

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	ELECTRICAL DATA						
	POWER SUPPLY 50 Hz	P1 MAX KW	P2 NOMINAL		In A	CAPACITOR	
			kW	HP		µF	Vc
EUROINOX 40/30 MP	1x220-240V	0.88	0.55	0.75	3.9	12.5	450
EUROINOX 30/50 MP	1x220-240V	0.88	0.55	0.75	3.9	12.5	450
EUROINOX 40/50 MP	1x220-240V	1.2	0.8	1.1	5.3	25	450
EUROINOX 30/80 MP	1x220-240V	1.2	0.75	1	5.3	25	450
EUROINOX 40/80 MP	1x220-240V	1.48	1	1.36	6.3	25	450

MODEL	A	B	C	E	F	G	I Ø	H	H1	H2	DNA GAS	DNM GAS	GROSS WEIGHT Kg
EUROINOX 40/30 MP	439	226	108	241	13.5	111	9	300	268	143	1"	1"	15.5
EUROINOX 30/50 MP	384	226	108	186	13.5	111	9	300	268	143	1"	1"	11.4
EUROINOX 40/50 MP	458	226	108	241	13.5	111	9	300	268	143	1"	1"	14.5
EUROINOX 30/80 MP	458	226	108	241	13.5	111	9	300	268	143	1"	1"	14.5
EUROINOX 40/80 MP	458	226	108	241	13.5	111	9	300	268	143	1"	1"	17.5

**TECHNICAL DATA****Operating range:**

up to 5.4 m³/h with head up to 61 metres.

Liquid quality requirements: clean, free from solid or abrasive contaminants, non-viscous, non-aggressive, uncrystallised and chemically neutral, close to the properties of water.

Liquid temperature range: from 0°C to +35°C for domestic use (EN 60335-2-41). For other use: from 0°C to +40°C

Maximum ambient temperature: +40°C

Maximum operating pressure: 8 bar (800 kPa)

Motor protection rating: IP 44

Terminal block protection rating: IP 55

Insulation class: F

Standard input voltage: single phase 220-240 V / 50 Hz

APPLICATIONS

Automatic booster sets, especially suitable for domestic use, small civil, farming or industrial installations, washing plants and leisure activities.

These feature JET self-priming electric pumps, which work even in the presence of air bubbles and small sandy impurities in the water.

The assembly comprises a 20 litre capacity mebrane tank, pressure switch for automatic operation, pressure gauge, JET electric pump with power cord with plug, fittings kit between the pump and the tank, all fully assembled and ready for installation.

CONSTRUCTIONAL FEATURES OF THE PUMP

Pump body and motor support in die cast aluminium.

Impeller, diffuser, venturi tube and sand guard in technopolymer

Stainless steel wear ring.

Carbon/ceramic mechanical seal.

CONSTRUCTIONAL FEATURES OF THE MOTOR

Asynchronous type, closed, with external air cooling.

Rotor mounted on oversized greased-for-life ball bearings, to guarantee low noise and long life.

Incorporated thermo-amperometric protection and permanently inserted capacitor.

Manufactured pursuant to CEI 2-3 / CEI 61-69 (EN 60335-2-41).



CONSTRUCTIONAL FEATURES OF THE TANK

Horizontal, 20 litre capacity tank, with butyl membrane, including rear support brackets and front housing brackets for installation of the top side of the pump.


MATERIALS

N°	PARTS *	MATERIALS
1	PUMP BODY	200 UNI ISO 185 CAST IRON
3	FRAME	DIE CAST ALUMINIUM
4	IMPELLER	TECHNOPOLYMER A
7	SHAFT WITH ROTOR	AISI 416 STAINLESS STEEL X12 CrS13 - UNI 6900/71
16	MECHANICAL SEAL	CARBON/CERAMIC
28	OR GASKET	NBR RUBBER
160	VENTURI DIFFUSER NOZZEL GROUP	TECHNOPOLYMER A

* In contact with liquid

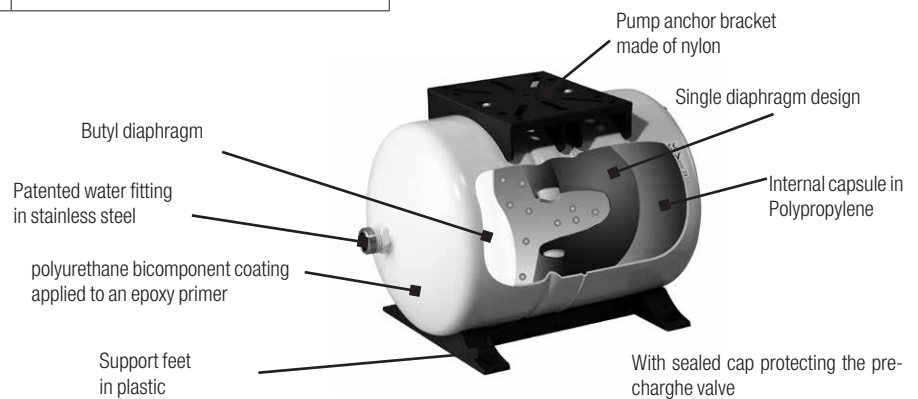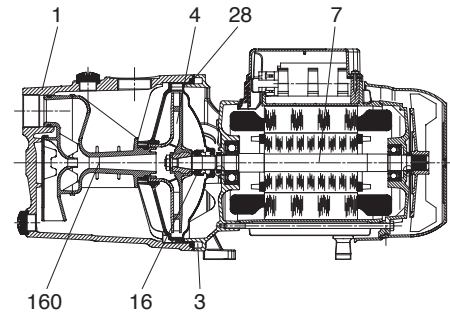


SELF PRIMING CAPACITY

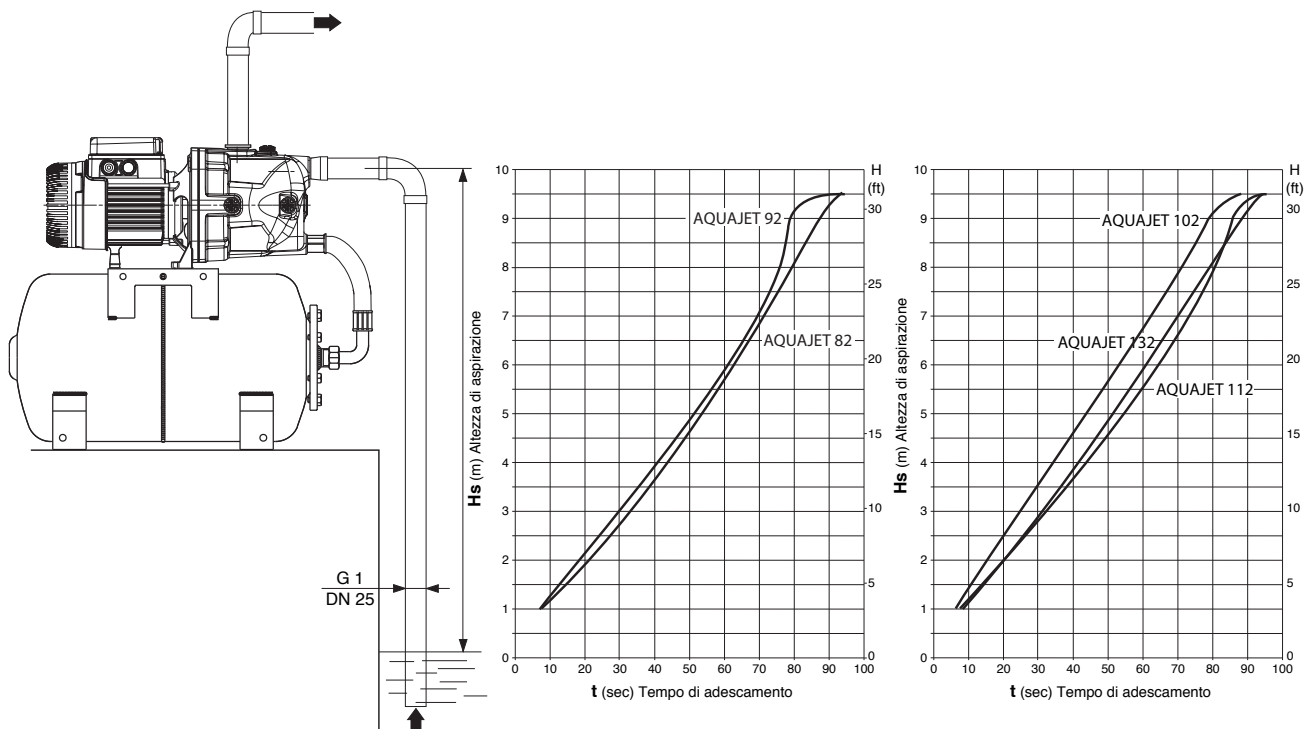

PERFORMANCE RANGE

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

GRAPHIC SELECTION TABLE






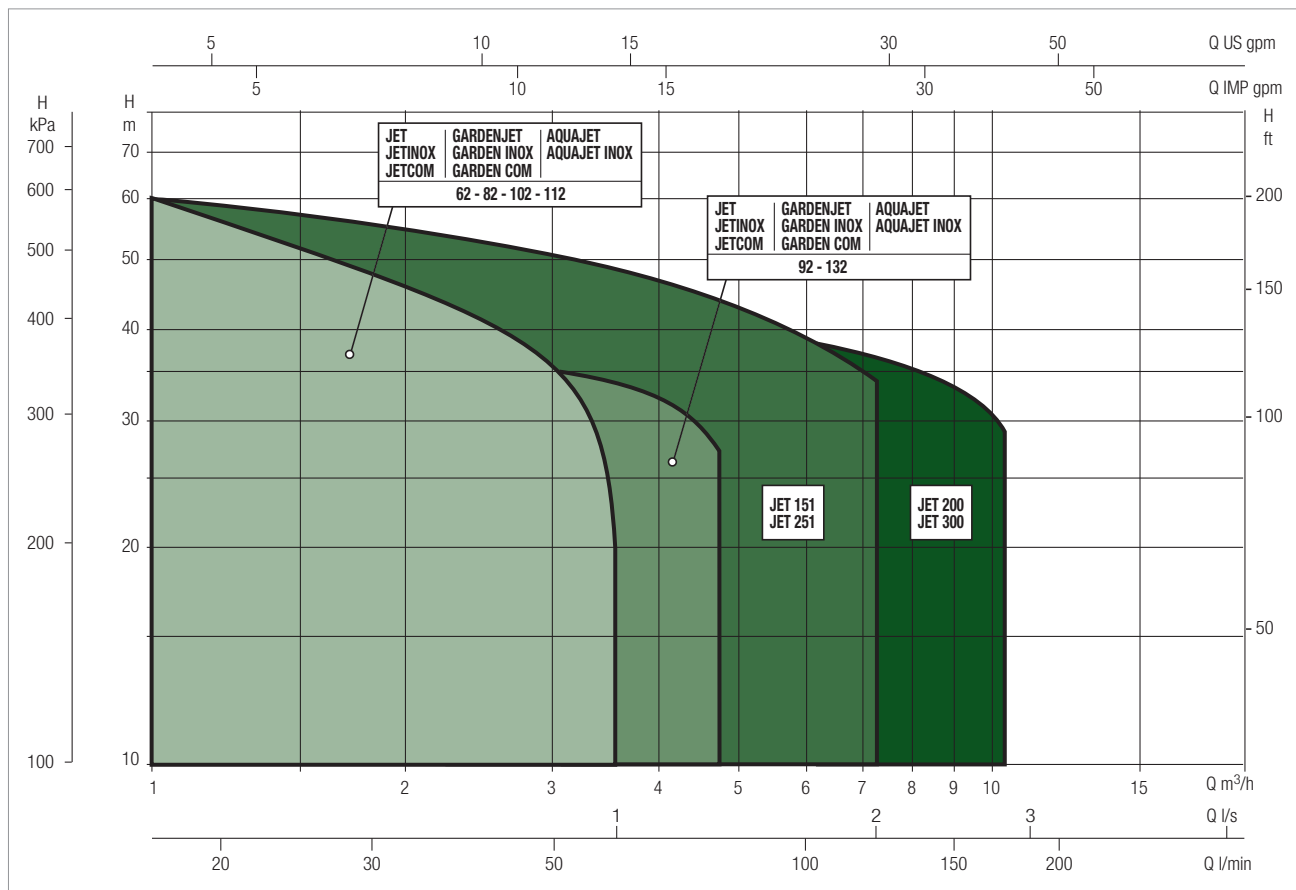


AQUAJET SELECTION TABLE

MODEL	Q=m ³ /h	0	0.6	1.2	1.8	2.4	3.0	3.6	4.2	4.8
	Q=l/min	0	10	20	30	40	50	60	70	80
AQUAJET 82 M	H (m)	47	40	34	30	26.2	23.5	20.3		
AQUAJET 102 M		53.8	47	41	36.3	32.4	28.8	25.8		
AQUAJET 112 M		61	54	47.8	42.8	38.8	34.8	22		
AQUAJET 92 M		36.2	33.5	31	28.4	26	24	21.8	19.6	17.5
AQUAJET 132 M		48.3	45.6	42.8	40	37.6	35	32.5	30	27.2

AQUAJET - AUTOMATIC SELF-PRIMING PRESSURISATION GROUPS FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from 0 °C to +35 °C - Maximum ambient temperature: +40°C

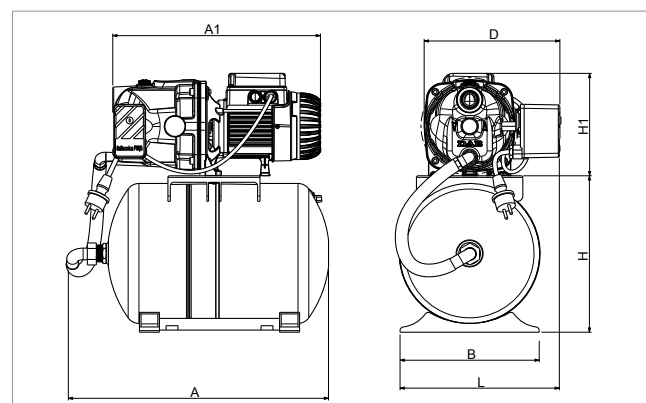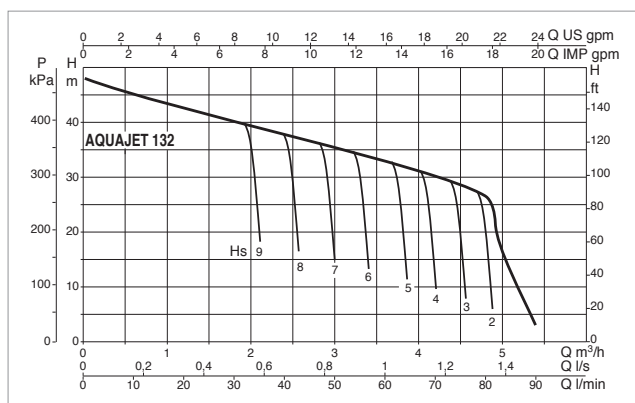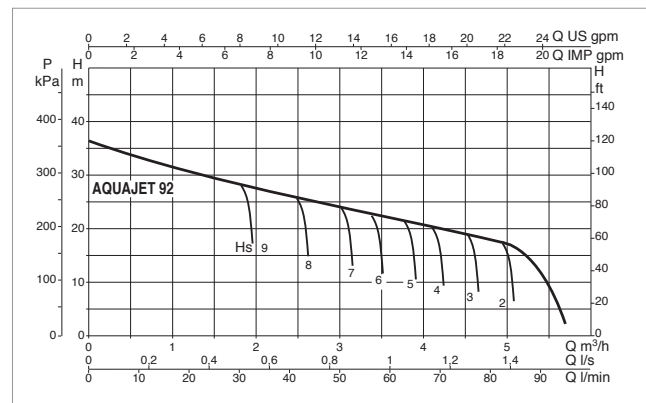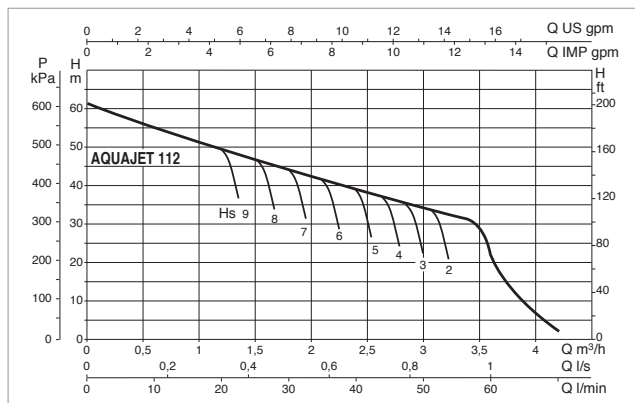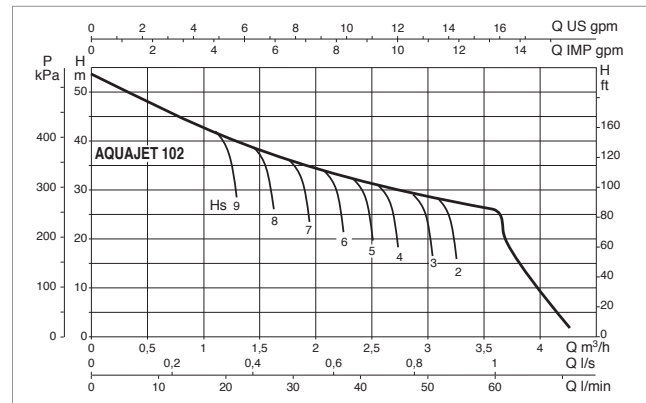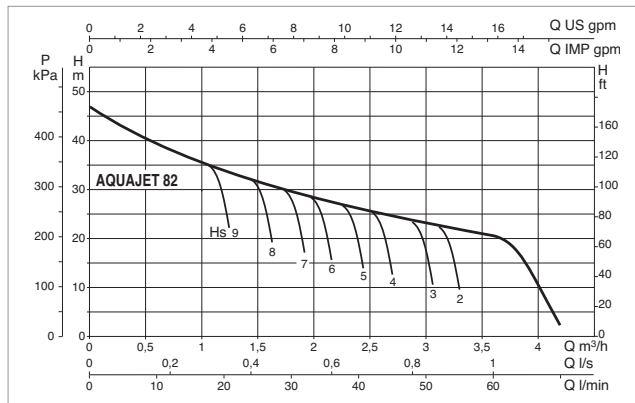

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	ELECTRICAL DATA						
	POWER SUPPLY 50 Hz	P1 MAX kW	P2 NOMINAL		In A	CAPACITOR	
			kW	HP		µF	Vc
AQUAJET 82 M	1x220-240 V ~	0.85	0.6	0.8	3.8	12.5	450
AQUAJET 102 M	1x220-240 V ~	1.13	0.75	1	5.1	16	450
AQUAJET 112 M	1x220-240 V ~	1.4	1	1.36	6.2	25	450
AQUAJET 92 M	1x220-240 V ~	0.94	0.75	1	4.2	14	450
AQUAJET 132 M	1x220-240 V ~	1.43	1	1.36	6.6	25	450

MODEL	A	A1	B	D	H	H1	L	DNA GAS	DNM GAS	PACK DIMENSIONS			VOLUME (mc)	GROSS WEIGHT Kg
										L/A	L/B	H		
AQUAJET 82 M	492	393	263	256	296	194	301	1"	1"	566	360	554	0.104	17.8
AQUAJET 102 M	492	413	263	256	296	204	301	1"	1"	566	360	554	0.104	19.8
AQUAJET 112 M	492	413	263	256	296	204	301	1"	1"	566	360	554	0.104	19
AQUAJET 92 M	492	303	263	256	296	194	301	1"	1"	566	360	554	0.104	20.1
AQUAJET 132 M	492	413	263	256	296	204	301	1"	1"	566	360	554	0.104	21.5

AQUAJETINOX

AUTOMATIC SELF-PRIMING PRESSURISATION GROUPS



TECHNICAL DATA

Operating range:

from 0.6 to 5.4 m³/h with head up to 61 metres.

Liquid quality requirements: clean, free from solid or abrasive contaminants, non-viscous, non-aggressive, uncrystallised and chemically neutral, close to the properties of water.

Liquid temperature range:

from 0°C to +35°C for domestic use (EN 60335-2-41).

for other use: from 0°C to +40°C

Maximum suction depth: 8 metres.

Maximum ambient temperature: +40°C

Maximum operating pressure: 8 bar (800 kPa)

Installation: fixed or portable in a horizontal position.

Special executions on request: alternative voltages and/or frequencies.

Motor protection rating: IP 44

Terminal block protection rating: IP 55

Insulation class: F

Standard input voltage: single phase 220/240 V / 50 Hz

APPLICATIONS

Automatic booster sets, especially suitable for domestic use, small civil, farming or industrial installations, washing plants and leisure activities.

These feature JETINOX self-priming electric pumps, which work even in the presence of air bubbles and small sandy impurities in the water.

The assembly comprises a 20 litre capacity membrane tank, pressure switch for automatic operation, pressure gauge, JETINOX electric pump with power cord with plug, fittings kit between the pump and the tank, all fully assembled and ready for installation.

CONSTRUCTIONAL FEATURES OF THE PUMP

Pump body, seal holder cover and wear ring in stainless steel.

Motor support in die cast aluminium.

Impeller, diffuser, venturi tube in technopolymer.

Carbon/ceramic mechanical seal.

CONSTRUCTIONAL FEATURES OF THE MOTOR

Asynchronous type, closed, with external air cooling.

Rotor mounted on oversized greased-for-life ball bearings, to guarantee low noise and long life.

Incorporated thermo-amperometric protection and permanently inserted capacitor in the single phase version.


It is recommended to use overload protection for three phase motor protection, in compliance with current legislation.

Manufacture pursuant to CEI 2-3 and CEI 61-69 (EN 60335-2-41) standard.

PERFORMANCE RANGE

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

GRAPHIC SELECTION TABLE

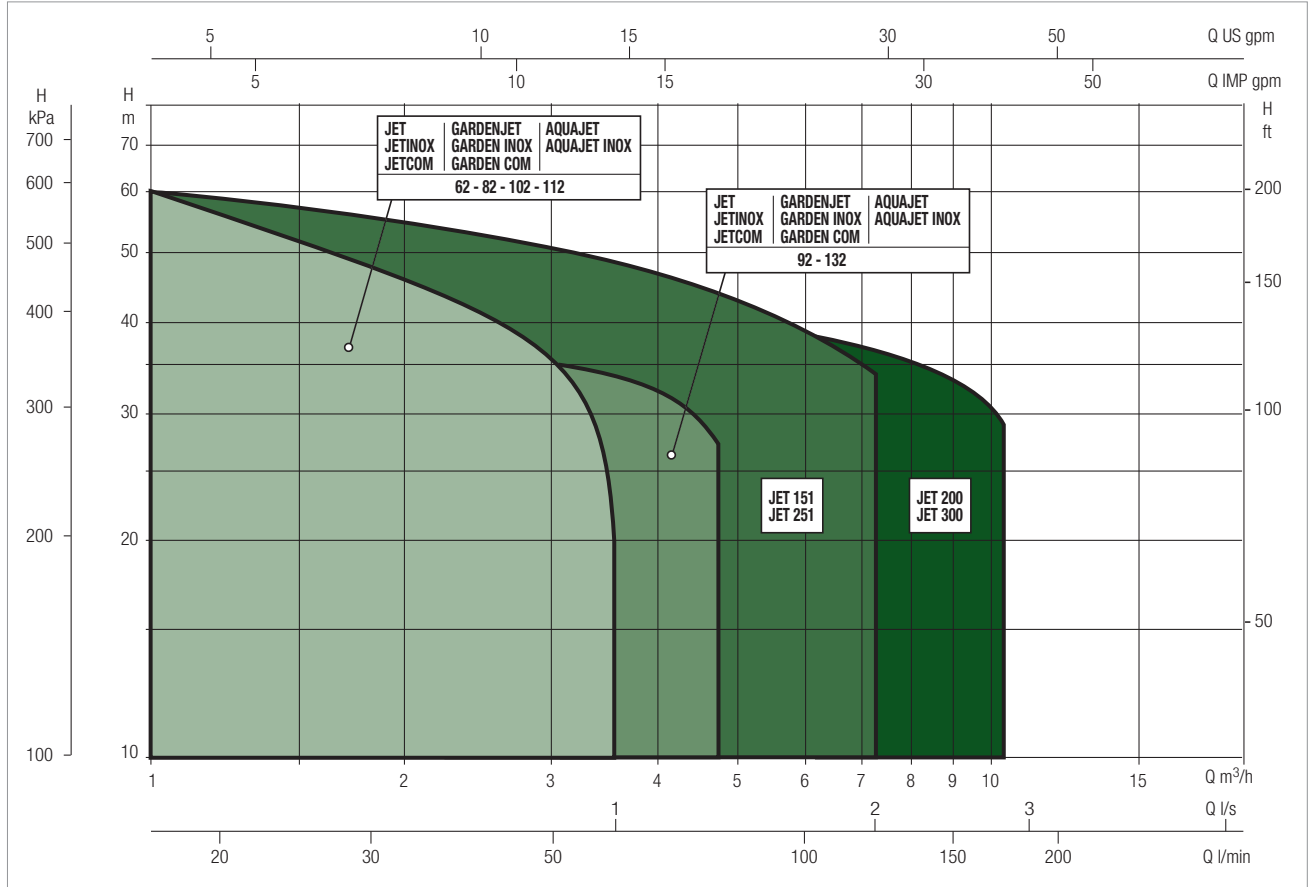

AQUAJETINOX SELECTION TABLE

MODEL	Q=m ³ /h	0	0.6	1.2	1.8	2.4	3.0	3.6	4.2	4.8
	Q=l/min	0	10	20	30	40	50	60	70	80
AQUAJET-INOX 82 M	H (m)	47	40	34	30	26.2	23.5	20.3		
AQUAJET-INOX 102 M		53.8	47	41	36.3	32.4	28.8	25.8		
AQUAJET-INOX 112 M		61	54	47.8	42.8	38.8	34.8	20		
AQUAJET-INOX 92 M		36.2	33.5	31	28.4	26	24	21.8	19.6	17.5
AQUAJET-INOX 132 M		48.3	45.6	42.8	40	37.6	35	32.5	30	27.2



AQUAJETINOX

AUTOMATIC SELF-PRIMING PRESSURISATION GROUPS




MATERIALS

N°	PARTS*	MATERIALS
1	PUMP BODY	AISI 304 STAINLESS STEEL X5 CRNI 1810 - UNI 6900/71
4	IMPELLER	TECHNOPOLYMER A
7	SHAFT WITH ROTOR	AISI 303 STAINLESS STEEL X10 CrNiS 1809 - UNI 6900/71
16	MECHANICAL SEAL	CARBON/CERAMIC
28	OR GASKET	NBR RUBBER
36	SEAL HOLDER COVER	AISI 304 STAINLESS STEEL X5 CRNI 1810 - UNI 6900/71
160	VENTURI DIFFUSER NOZZLE GROUP	TECHNOPOLYMER A

* In contact with liquid





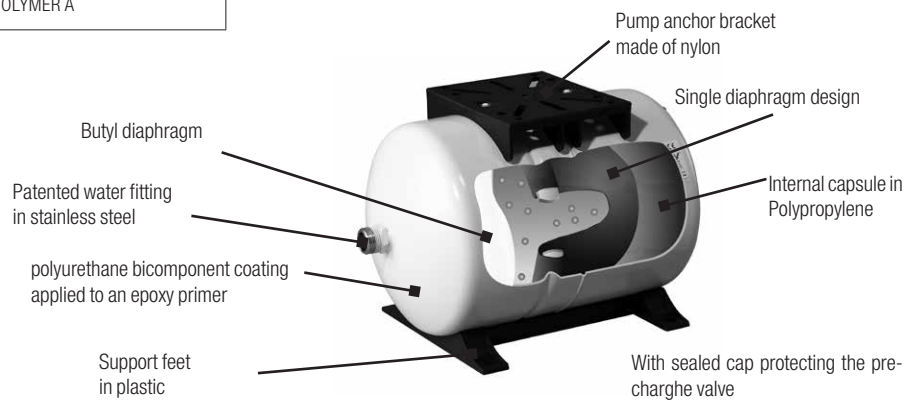
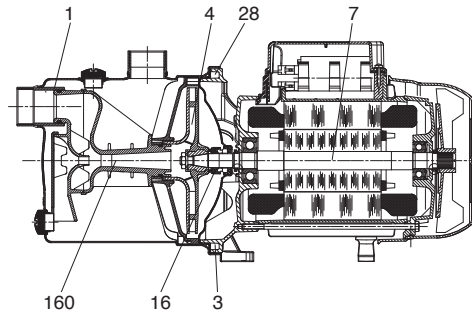


SELF PRIMING CAPACITY

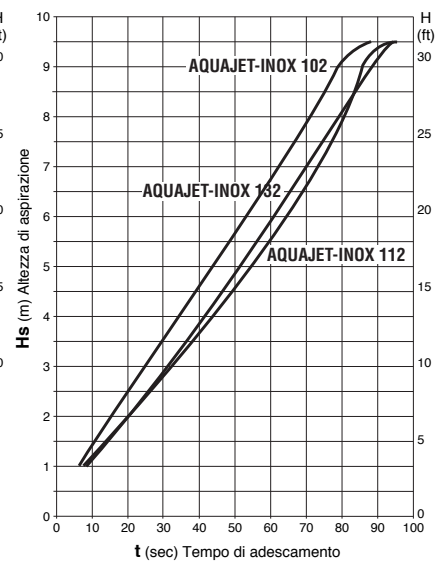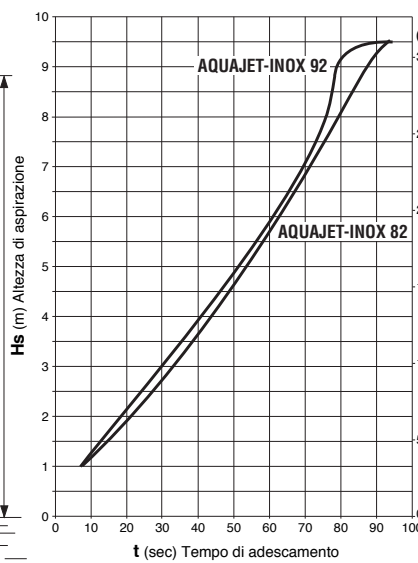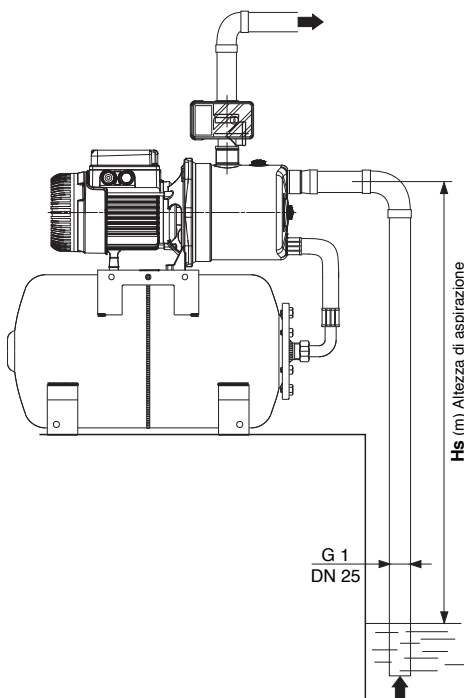

AQUAJETINOX - AUTOMATIC SELF-PRIMING PRESSURISATION GROUPS FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from 0 °C to +35 °C - Maximum ambient temperature: +40°C

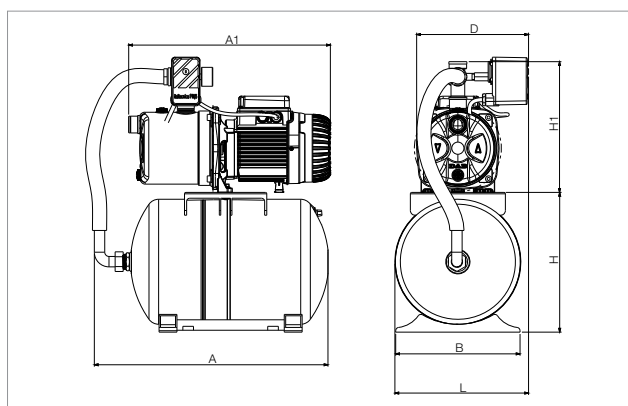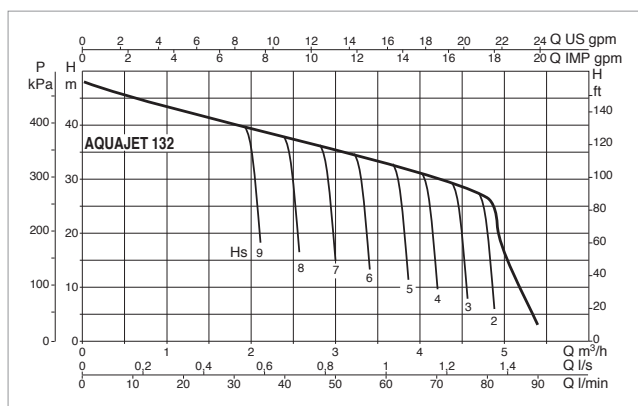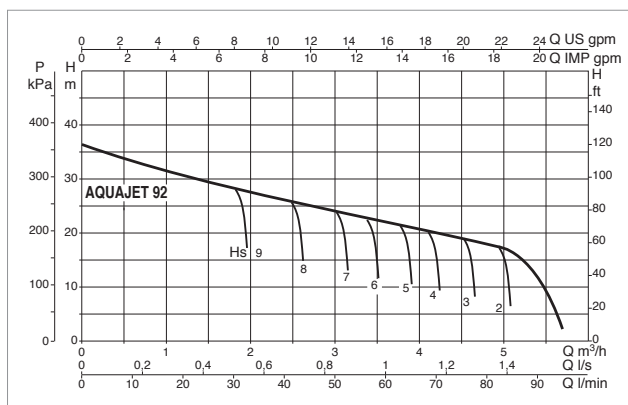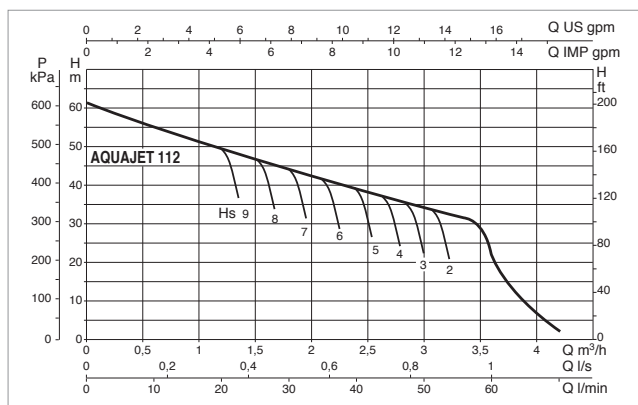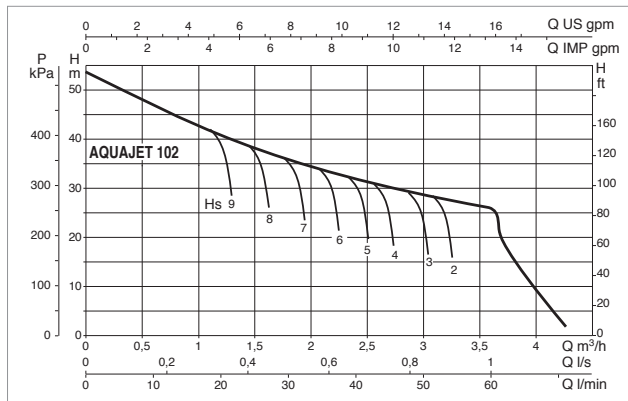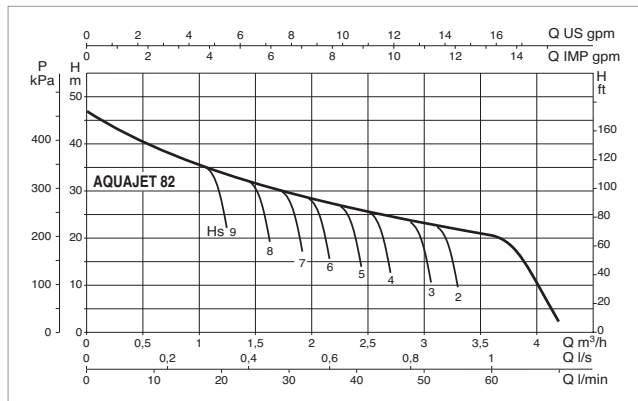


The performance curves are based on kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	ELECTRICAL DATA						
	POWER SUPPLY 50 Hz	P1 MAX kW	P2 NOMINAL		I _n A	CAPACITOR	
			kW	HP		μF	V _c
AQUAJET-INOX 82 M	1x220-240 V ~	0.85	0.6	0.8	3.8	12.5	450
AQUAJET-INOX 102 M	1x220-240 V ~	1.13	0.75	1	5.1	16	450
AQUAJET-INOX 112 M	1x220-240 V ~	1.4	1	1.36	6.2	25	450
AQUAJET-INOX 92 M	1x220-240 V ~	0.94	0.75	1	4.2	14	450
AQUAJET-INOX 132 M	1x220-240 V ~	1.43	1	1.36	4.7-2.7	25	450

MODEL	A	A1	B	D	H	H1	L	DNA GAS	DNM GAS	PACK DIMENSIONS			VOLUME (mc)	GROSS WEIGHT Kg
										L/A	L/B	H		
AQUAJET-INOX 82 M	494	406	263	237	296	277	283	1"	1"	566	360	629	0.102	16
AQUAJET-INOX 102 M	494	426	263	237	296	277	283	1"	1"	566	360	629	0.102	19.5
AQUAJET-INOX 112 M	494	426	263	237	296	277	283	1"	1"	566	360	629	0.102	20
AQUAJET-INOX 92 M	494	406	263	237	296	277	283	1"	1"	566	360	629	0.102	16.5
AQUAJET-INOX 132 M	494	426	263	237	296	277	283	1"	1"	566	360	629	0.102	19.5

ACTIVE SYSTEM

AUTOMATIC ON/OFF PRESSURISATION SYSTEM

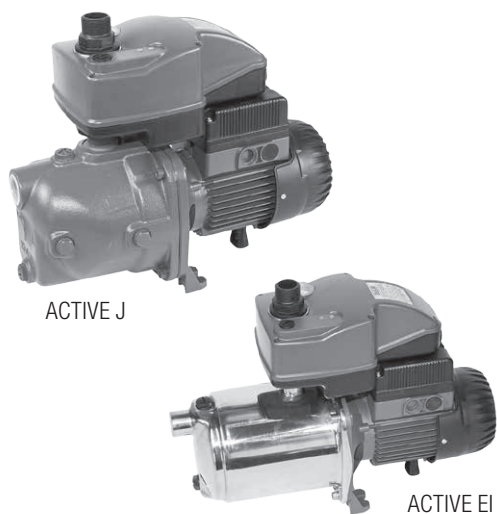

TECHNICAL DATA

Operating range:

from 0.4 to 10.5 m³/h with head up to 62 metres.

Liquid quality requirements: clean, free from solid or abrasive contaminants, non-viscous, non-aggressive, uncrystallised and chemically neutral, close to the properties of water.

Liquid temperature range: from 0°C to +35°C for domestic use (EN 60335-2-41). For other use: from 0°C to +40°C

Maximum ambient temperature: +40°C

Maximum operating pressure: 8 bar (800 kPa)

Installation: fixed in a horizontal position.

Special executions on request: different frequencies and/or voltage.

Motor protection rating: IP 44

Terminal block protection rating: IP 55

Insulation class: F

Standard input voltage: single phase 220/240 V / 50 Hz
three phase 230/400 V - 50 Hz

APPLICATIONS

ACTIVE is an automatic pumping system comprising a pump, a motor and an integrated control unit. It is especially suitable for domestic use, small civil, farming or industrial installations, washing plants and leisure activities.

The pump may be used to pump rainwater or potable or not-potable water.

The pumps that may be added to this system are:

- JET, JETINOX and JETCOM self-priming pumps or the EUROINOX multi-stage pumps suitable for operation in the presence of air or gas bubbles. These are indispensable when drawing water from artesian wells and when there are problems with priming and suction.
- EURO, EUROCOM multi-stage pumps suitable for very quiet operation in positive suction head installation..

CONSTRUCTIONAL FEATURES OF THE PUMP

The ACTIVE system is easy to install and ready to use, integrated with the electric pump, which:

- controls it
- runs it automatically
- regulates its operation
- limits its start ups
- ensures pressure stability inside the hydraulic circuit
- enables electronic control of the start up pressure.

OPERATION

The ACTIVE system is an electronic device with a pressure switch and a flow switch, which enable the electric pump to always operate under the best conditions. Under minimal water pumping conditions, upon start up, the electric pump begins after the system pressure has dropped to its calibration pressure, which is adjustable by the user (from 1.5 to 4.5 bar under the pressure-flow switch or from 1.5 to 8 bar under the pressure switch). If there is a leak in the system, slight dripping or runs or if there is just a small draw, the ACTIVE system limits the number of electric pump start ups.


The system eliminates water hammers, because when the draw of water is stopped, the delayed stop of the electric pump comes with zero flow rate. If there is no water to be drawn, the ACTIVE system is triggered to avoid the dry running working pump. The system has LED signals and alarms. It has an automatic restart once the error conditions have been reset.

The ACTIVE system requires no maintenance or adjustment.

MATERIALS

N°	PARTS *	MATERIALS
1	DIAPHRAGM BODY	PA 66 30% FV
2	DIAPHRAGM	EPDM FOOD GRADE RUBBER
3	COUPLING + OR	POM-GF25 + NBR
4	SPRING	AISI 302 STAINLESS STEEL
5	VNR	POM COPOLYMER
6	OR GASKET	GOMMA EPDM

* In contact with liquid

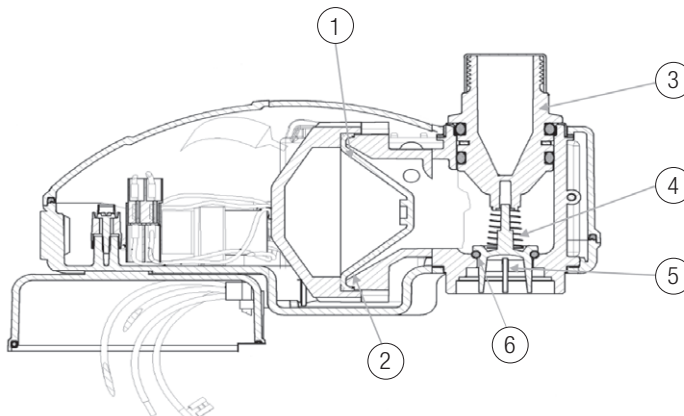


ACTIVE SYSTEM

AUTOMATIC ON/OFF PRESSURISATION SYSTEM

PERFORMANCE RANGE

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

GRAPHIC SELECTION TABLE


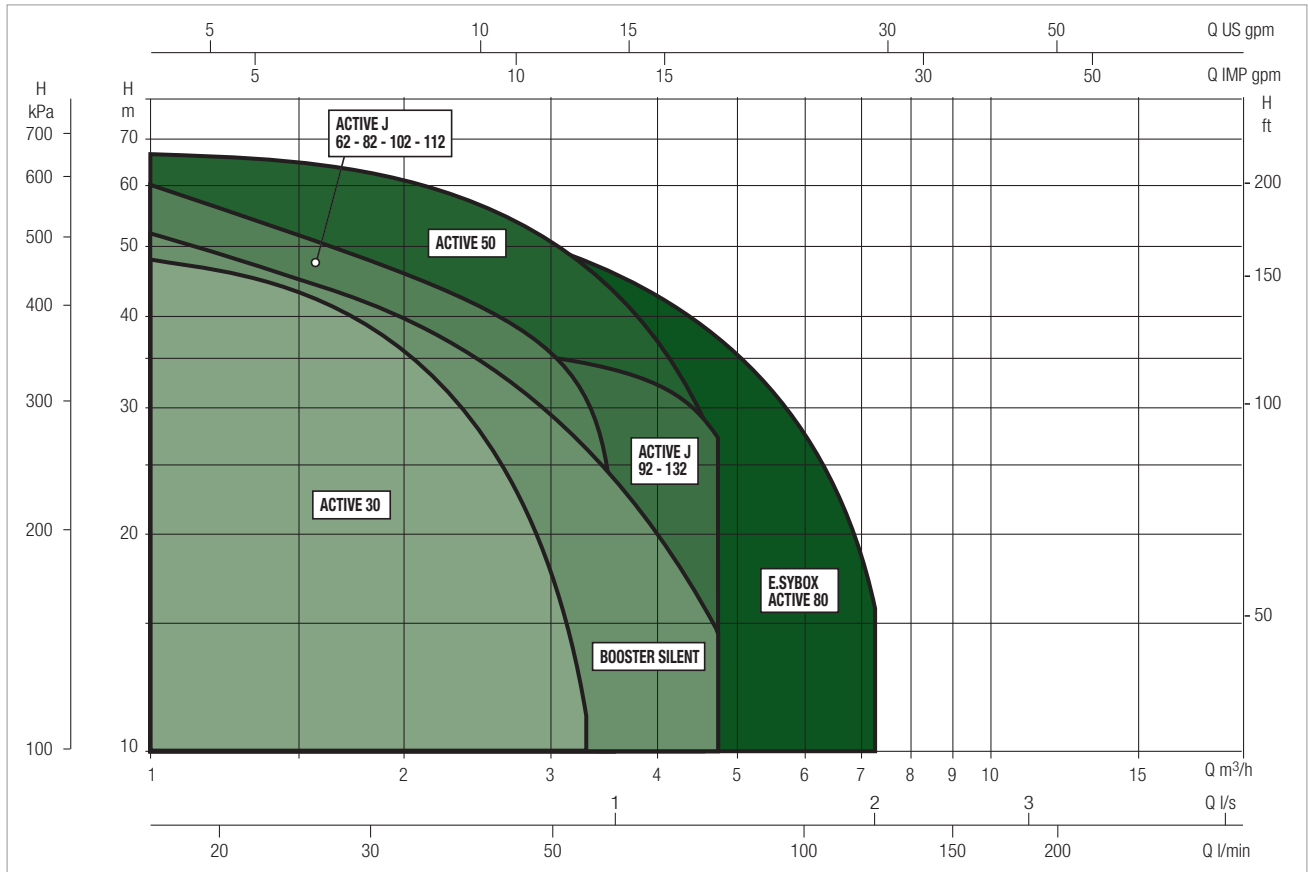


ACTIVE SYSTEM SELECTION TABLE

MODEL	Q		H (m)											
	m ³ /h	l/min	0	0.6	1.2	1.8	2.4	3.0	3.6	4.2	4.8	6	7.2	
ACTIVE J 62 M	0	0	42.7	35	29.2	25.6	22.9	13						
ACTIVE J 82 M	0	10	47	40	34	30	26.2	23.5	20.3					
ACTIVE J 102 M	0	20	53.8	47	41	36.3	32.4	28.8	25.8					
ACTIVE J 112 M	0	30	61	54	47.8	42.8	38.8	34.8	20					
ACTIVE J 92 M	0	10	36.2	33.5	31	28.4	26	24	21.8	19.6	17.5			
ACTIVE J 132 M	0	20	48.3	45.6	42.8	40	37.6	35	32.5	30	27.2			
ACTIVE JI 82 M	0	10	47	40	34	30	26.2	23.5	20.3					
ACTIVE JI 102 M	0	20	53.8	47	41	36.3	32.4	28.8	25.8					
ACTIVE JI 112 M	0	30	61	54	47.8	42.8	38.8	34.8	20					
ACTIVE JI 92 M	0	10	36.2	33.5	31	28.4	26	24	21.8	19.6	17.5			
ACTIVE JI 132 M	0	20	48.3	45.6	42.8	40	37.6	35	32.5	30	27.2			
ACTIVE JC 102 M	0	20	53.8	47	41	36.3	32.4	28.8	25.8					
ACTIVE JC 132 M	0	30	61	54	47.8	42.8	38.8	34.8	20					
ACTIVE E 30/50 M	0	30	42.2	40.2	38.2	36.2	33.8	30	24.8	19.5	14			
ACTIVE EI 25/30 M	0	30	34.4	31.7	28.3	23.5	17.5	11						
ACTIVE EI 30/30 M	0	30	46	42.2	37.8	31.2	23.3	14.3						
ACTIVE EI 40/30 M	0	30	57	52.7	47	38.8	29	17.7						
ACTIVE EI 30/50 M	0	30	42.2	40.2	38.2	36.2	33.8	30	24.8	19.5	14			
ACTIVE EI 40/50 M	0	30	57.7	55.3	52.8	50.1	47.1	42.7	35.8	28	19.2			
ACTIVE EI 50/50 M	0	30	72	68.5	65.5	62.1	58.2	52.2	48	43.6	34.5	26		
ACTIVE EI 25/80 M	0	30	34		33	32	30.5	28.5	26	23.5	21	14.5	6.5	
ACTIVE EI 30/80 M	0	30	47		46.5	45	43.5	41	38	34.5	31	23	12	
ACTIVE EI 40/80 M	0	30	59	58	57	56	54	51	47.5	43.8	39.5	29.5	16	

ACTIVE J AUTOMATIC ON/OFF PRESSURISATION SYSTEM FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from 0 °C to +40 °C - Maximum ambient temperature: +40°C

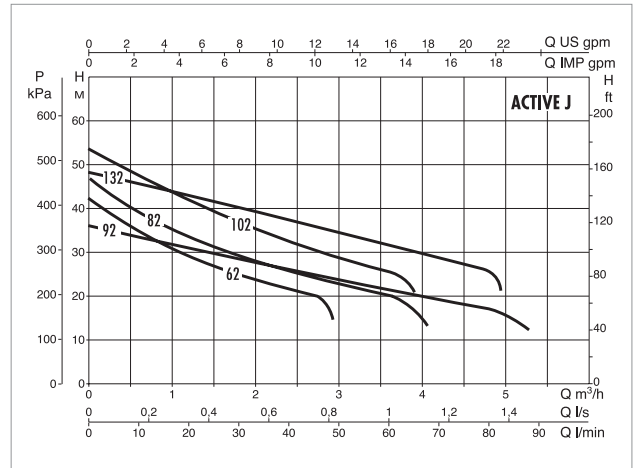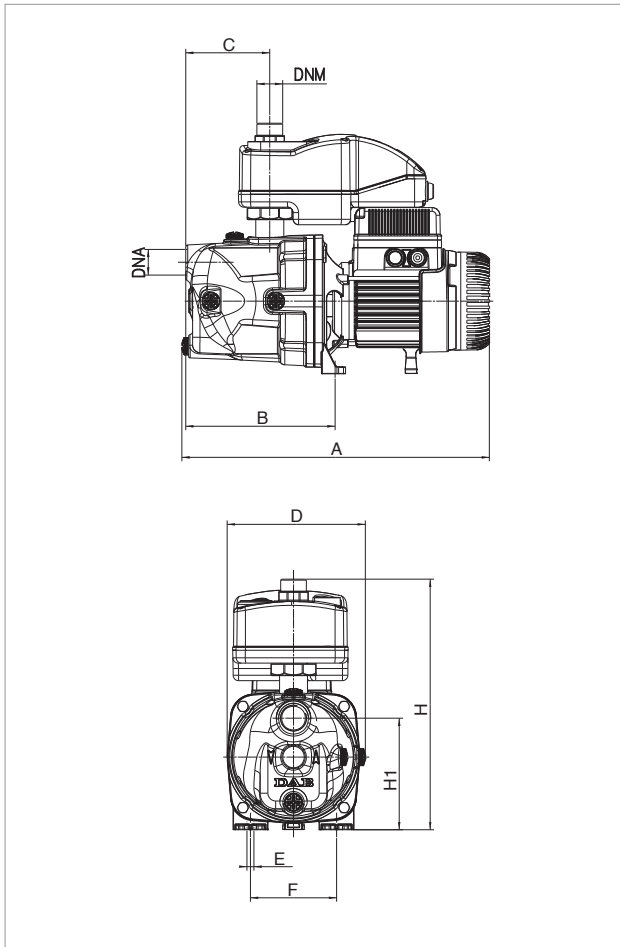



The performance curves are based on the kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	ELECTRICAL DATA						
	POWER SUPPLY 50 Hz	P1 MAX kW	P2 NOMINAL		In A	CAPACITOR	
			kW	HP		µF	Vc
ACTIVE J 62 M	1x220-240 V ~	0.720	0.44	0.6	3.12	12.5	450
ACTIVE J 82 M	1x220-240 V ~	0.850	0.6	0.8	3.8	12.5	450
ACTIVE J 102 M	1x220-240 V ~	1.130	0.75	1	5.1	16	450
ACTIVE J 92 M	1x220-240 V ~	0.940	0.75	1	4.2	14	450
ACTIVE J 132 M	1x220-240 V ~	1.490	1	1.36	6.6	25	450

MODEL	A	B	C	D	E	F	H	H1	DNA GAS	DNM GAS	PACK DIMENSIONS			GROSS WEIGHT Kg
											L/A	L/B	C	
ACTIVE J 62 M	395	192	108	178	9	111	322	144	1"	1"	476	234	348	10.50
ACTIVE J 82 M	395	192	108	178	9	111	322	144	1"	1"	476	234	348	13.2
ACTIVE J 102 M	395	192	108	178	9	111	322	144	1"	1"	476	234	348	12.50
ACTIVE J 92 M	395	192	108	178	9	111	322	144	1"	1"	476	234	348	11.70
ACTIVE J 132 M	395	192	108	178	9	111	322	144	1"	1"	476	234	348	13.50

ACTIVE JI - AUTOMATIC ON/OFF PRESSURISATION SYSTEM FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from 0 °C to +40 °C - Maximum ambient temperature: +40°C

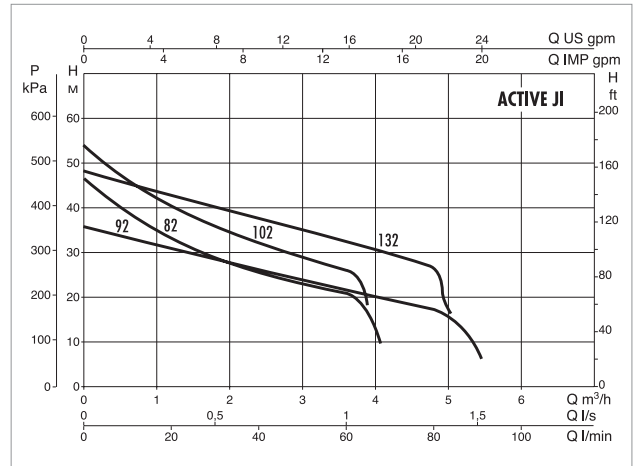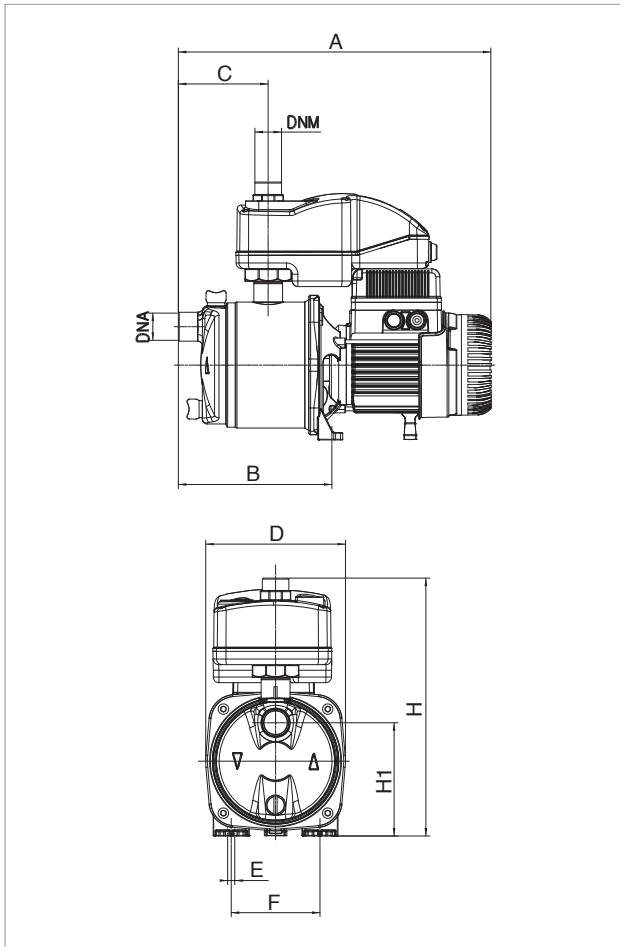



The performance curves are based on the kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	ELECTRICAL DATA						
	POWER SUPPLY 50 Hz	P1 MAX kW	P2 NOMINAL		In A	CAPACITOR	
			kW	HP		µF	Vc
ACTIVE JI 82 M	1x220-240 V ~	0.85	0.6	0.8	3.8	12.5	450
ACTIVE JI 102 M	1x220-240 V ~	1.13	0.75	1	5.1	16	450
ACTIVE JI 92 M	1x220-240 V ~	0.94	0.75	1	4.2	14	450
ACTIVE JI 112 M	1x220-240 V ~	1.4	1	1.36	6	25	450
ACTIVE JI 132 M	1x220-240 V ~	1.49	1	1.36	6.6	25	450

MODEL	A	B	C	D	E	F	H	H1	DNA GAS	DNM GAS	PACK DIMENSIONS			GROSS WEIGHT Kg
											L/A	L/B	C	
ACTIVE JI 82 M	390	192	112	174	9	111	322	141	1"	1"	476	234	348	10.70
ACTIVE JI 102 M	390	192	112	174	9	111	322	141	1"	1"	476	234	348	12.50
ACTIVE JI 92 M	390	192	112	174	9	111	322	141	1"	1"	476	234	348	11.70
ACTIVE JI 112 M	390	192	112	174	9	111	322	141	1"	1"	476	234	348	13.70
ACTIVE JI 132 M	390	192	112	174	9	111	322	141	1"	1"	476	234	348	13.50

ACTIVE JC - AUTOMATIC ON/OFF PRESSURISATION SYSTEM FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from 0 °C to +40 °C - Maximum ambient temperature: +40°C

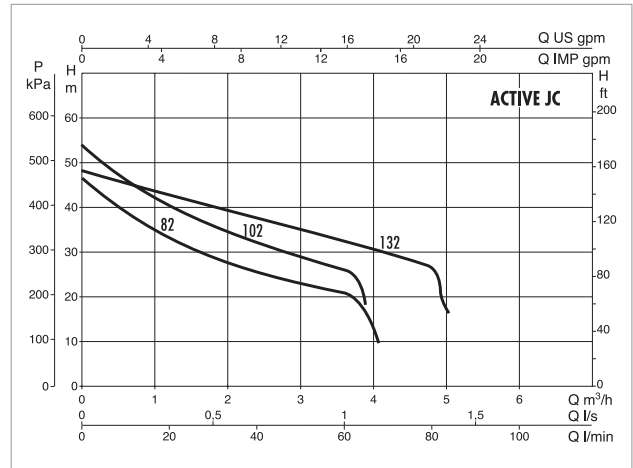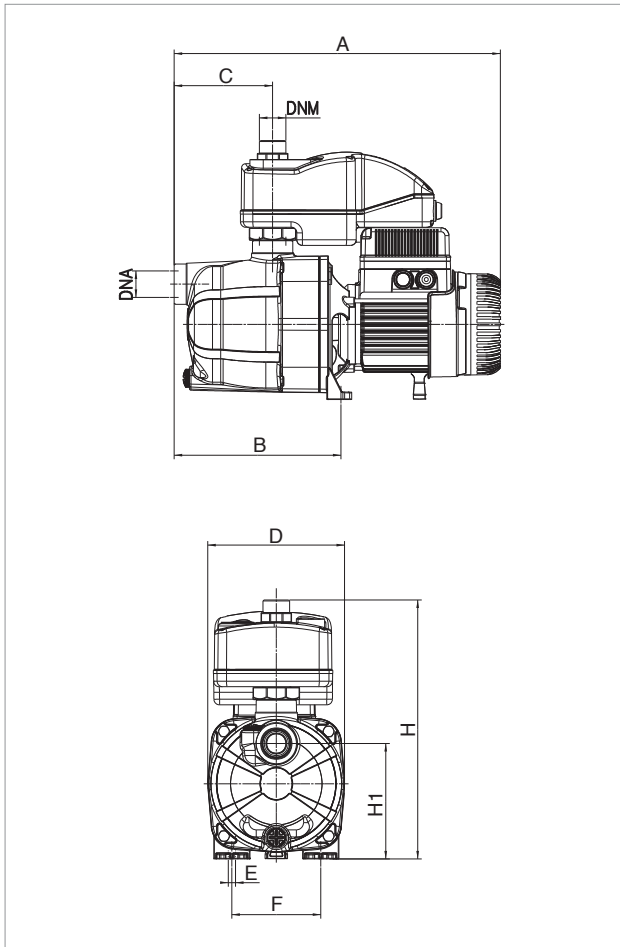



The performance curves are based on the kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	ELECTRICAL DATA						
	POWER SUPPLY 50 Hz	P1 MAX kW	P2 NOMINAL		In A	CAPACITOR	
			kW	HP		µF	Vc
ACTIVE JC 102 M	1x220-240 V ~	1.130	0.75	1	5.1	16	450
ACTIVE JC 132 M	1x220-240 V ~	1.49	1	1.36	6.6	25	450

MODEL	A	B	C	D	E	F	H	H1	DNA	DNM	PACK DIMENSIONS			GROSS WEIGHT Kg
											L/A	L/B	C	
ACTIVE JC 102 M	406	208	122	170	9	111	322	144	1" G	1" G	476	234	348	12.50
ACTIVE JC 132 M	406	208	122	170	9	111	322	144	1" G	1" G	476	234	348	13.50

ACTIVE E - AUTOMATIC ON/OFF PRESSURISATION SYSTEM FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from 0 °C to +40 °C - Maximum ambient temperature: +40°C

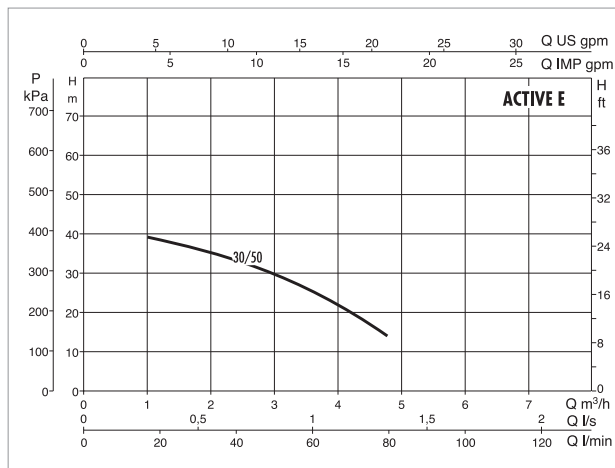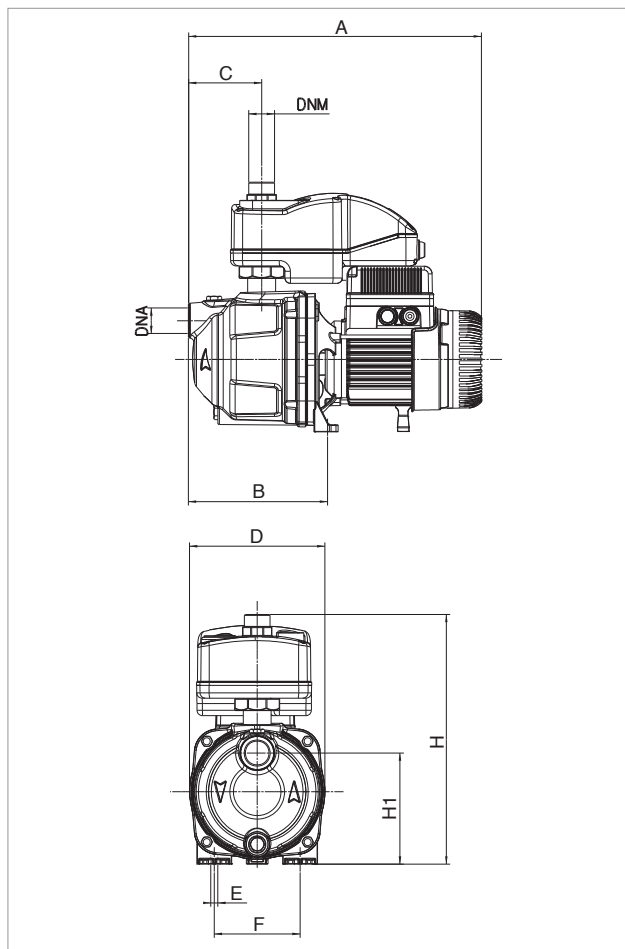



The performance curves are based on the kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	ELECTRICAL DATA						
	POWER SUPPLY 50 Hz	P1 MAX kW	P2 NOMINAL		In A	CAPACITOR	
			kW	HP		µF	Vc
ACTIVE E 30/50 M	1x220-240 V ~	0.88	0.55	0.75	3.9	12.5	450

MODEL	A	B	C	D	E	F	H	H1	DNA GAS	DNM GAS	PACK DIMENSIONS			GROSS WEIGHT Kg
											L/A	L/B	C	
ACTIVE E 30/50 M	377	180	94	175	9	111	322	144	1"	1"	476	234	348	11.70

ACTIVE EI - AUTOMATIC ON/OFF PRESSURISATION SYSTEM FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from 0 °C to +40 °C - Maximum ambient temperature: +40°C

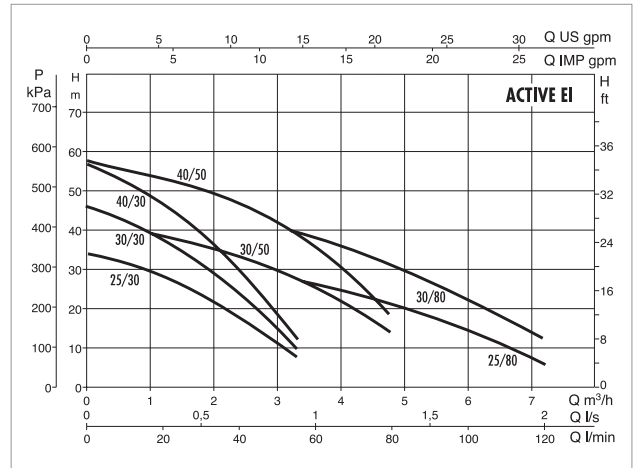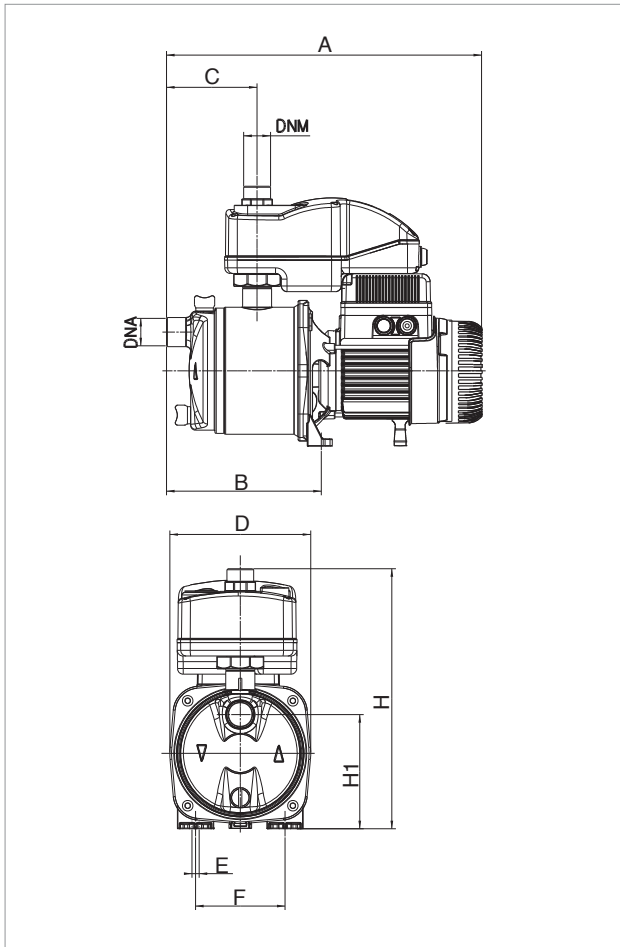

The performance curves are based on the kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	ELECTRICAL DATA						
	POWER SUPPLY 50 Hz	P1 MAX kW	P2 NOMINAL		I _n A	CAPACITOR	
			kW	HP		μF	V _c
ACTIVE EI 25/30 M	1x220-240 V ~	0.520	0.37	0.5	2.4	10	450
ACTIVE EI 30/30 M	1x220-240 V ~	0.720	0.45	0.6	3.2	12.5	450
ACTIVE EI 40/30 M	1x220-240 V ~	0.880	0.55	0.75	3.9	12.5	450
ACTIVE EI 30/50 M	1x220-240 V ~	0.880	0.55	0.75	3.9	12.5	450
ACTIVE EI 40/50 M	1x220-240 V ~	1.200	0.8	1.1	5.3	20	450
ACTIVE EI 50/50 M	1x220-240 V ~	1.48	1	1.36	6	25	450
ACTIVE EI 25/80 M	1x220-240 V ~	0.880	0.55	0.75	3.9	12.5	450
ACTIVE EI 30/80 M	1x220-240 V ~	1.200	0.8	1.1	5.3	20	450
ACTIVE EI 40/80 M	1x220-240 V ~	1.48	1	1.36	6	25	450

MODEL	A	B	C	D	E	F	H	H1	DNA	DNM	PACK DIMENSIONS			GROSS WEIGHT Kg
											L/A	L/B	C	
ACTIVE EI 25/30 M	390	192	112	174	9	111	322	141	1" G	1" G	476	234	348	10.90
ACTIVE EI 30/30 M	445	247	167	174	9	111	322	141	1" G	1" G	476	234	348	13.50
ACTIVE EI 40/30 M	445	247	167	174	9	111	322	141	1" G	1" G	476	234	348	14.00
ACTIVE EI 30/50 M	390	192	112	174	9	111	322	141	1" G	1" G	476	234	348	10.00
ACTIVE EI 40/50 M	445	247	167	174	9	111	322	141	1" G	1" G	476	234	348	15.50
ACTIVE EI 50/50 M	445	247	167	174	9	111	322	141	1"	1"	476	234	348	15.20
ACTIVE EI 25/80 M	390	192	112	174	9	111	322	141	1" G	1" G	476	234	348	9.50
ACTIVE EI 30/80 M	445	247	167	174	9	111	322	141	1" G	1" G	476	234	348	15.50
ACTIVE EI 40/80 M	445	247	167	174	9	111	322	141	1"	1"	476	234	348	15.00

BOOSTER SILENT

AUTOMATIC ON/OFF PRESSURISATION SYSTEMS



TECHNICAL DATA

Operating range:

capacity up to 90 l/min; head up to 46 m.

Liquid temperature range:

for domestic use: from +35°C to +35°C

for other use: from 0°C to +40°C

Liquid quality requirements:

Clean, free from solid or abrasive contaminants, non-viscous, non-aggressive, uncrystallised and chemically neutral.

Maximum suction depth: 8 metres

Maximum ambient temperature: +40°C

Protection rating: IPX4

Insulation class: F

Installation: fixed or portable in a horizontal position.

Special executions on request: alternative voltages and/or frequencies.

APPLICATIONS

Automatic, self-priming up to 8 metres, pressurisation system with multi-impellers (3-4-5) and integrated electronics, for domestic water supply in gardens and small irrigation systems.


FEATURES

Hull in sound absorbant composite material, with technopolymer hydraulics. Carbon/ceramic mechanical seal. Single phase, asynchronous, continuous service motor cooled by the liquid being pumped. Incorporated thermo-amperometric protection and permanently inserted capacitor.

The system is equipped with an integrated electronics board, pressure and flow switches for automatic start and stop as soon as the taps are opened or closed. The electronics prevent the pump from dry-running. The system has LED signals and alarms. It has an automatic restart once the error conditions have been reset. The system is equipped with non-return valves in aspiration, 2 metre power cord and plug and a 2 litre tank.

MATERIALS

N°	PARTS	MATERIALS
1	PUMP BODY	TECHNOPOLYMER
2	NON-RETURN VALVE	TECHNOPOLYMER
3	NUT	UNI7474 A2 STAINLESS STEEL NUT
4	WASHER	A2 STAINLESS STEEL
5	OR GASKET	NBR
6	DIFFUSER PLUG	TECHNOPOLYMER
7	OR GASKET	NBR
8	DIFFUSER	TECHNOPOLYMER
9	IMPELLER	TECHNOPOLYMER
10	ROTOR SHAFT	AISI 416 STAINLESS STEEL UNI EN 10088-1 X12CrS13
11	WASHER	A2 STAINLESS STEEL
12	OR GASKET	NBR
13	MECHANICAL SEAL	SILICON - VITON
14	COUNTERFACE	STEA/NBR
15	BODY	TECHNOPOLYMER

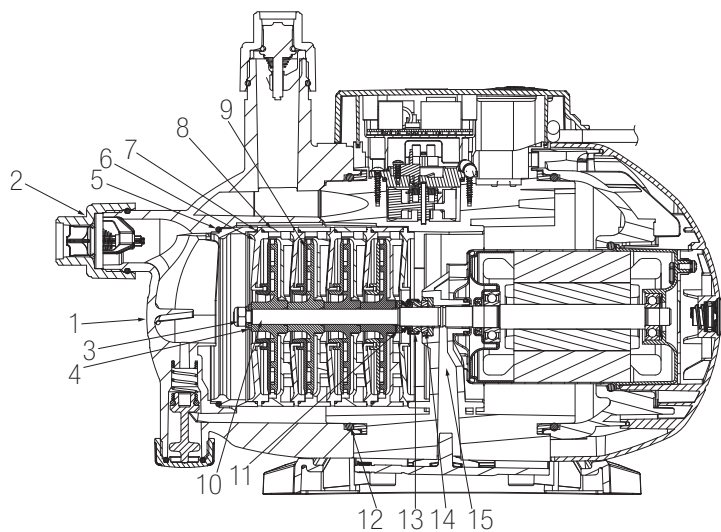


BOOSTER SILENT

AUTOMATIC ON/OFF PRESSURISATION SYSTEMS

PERFORMANCE RANGE

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

GRAPHIC SELECTION TABLE


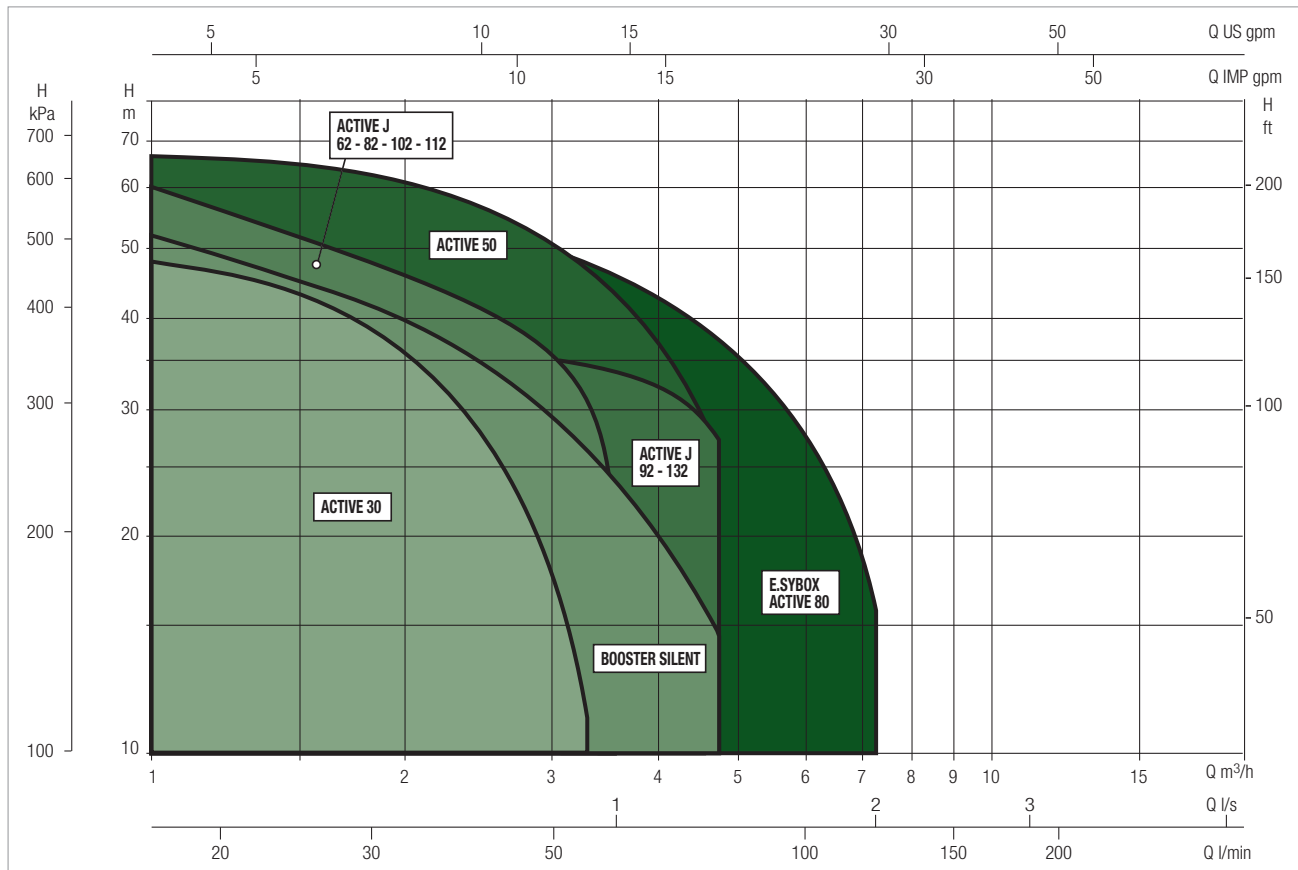


BOOSTER SILENT SELECTION TABLE

MODEL	Q=m ³ /h	0	0.6	1.2	1.8	2.4	3.0	3.6	4.2	4.8
	Q=l/min	0	10	20	30	40	50	60	70	80
BOOSTER SILENT 3 M	H (m)	37	34	32	31	27	23	19	15	8
BOOSTERSILENT 3 M 1.5 BAR		37	34	32	31	27	23	19	15	8
BOOSTER SILENT 4 M		47	43	40	35	31	27	22	17	9
BOOSTER SILENT 5 M		57	52	48	43	38	31	25	18	10

BOOSTER SILENT - AUTOMATIC ON/OFF PRESSURISATION SYSTEMS FOR DOMESTIC WATER SUPPLY

LIQUID TEMPERATURE RANGE PUMPED: FROM 0 °C TO +35 °C - MAXIMUM AMBIENT TEMPERATURE: +40°C

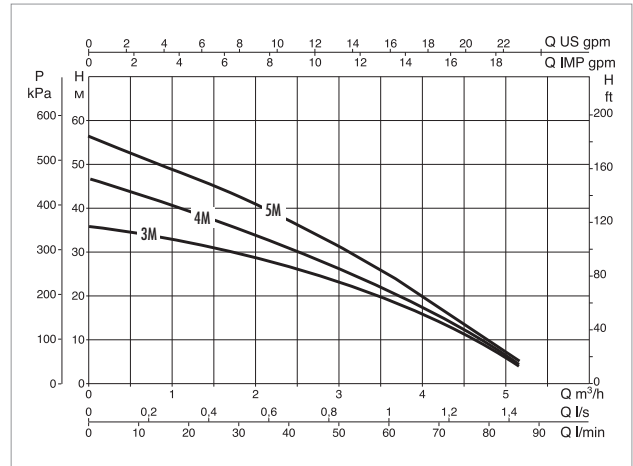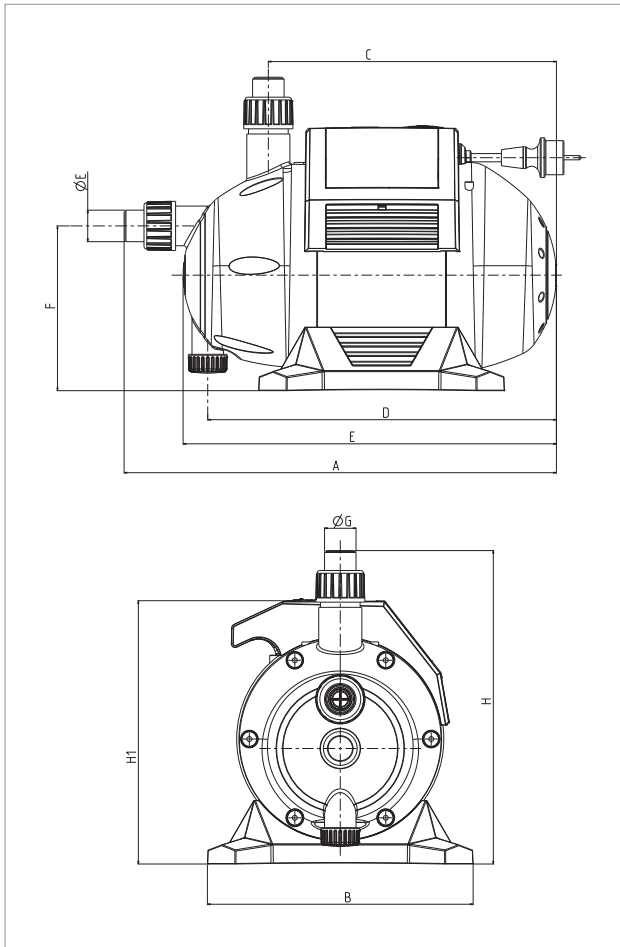

The performance curves are based on the kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	ELECTRICAL DATA					
	N° IMPELLER	POWER SUPPLY 50 Hz	P1 MAX KW	P2 NOMINAL		In A
				kW	HP	
BOOSTER SILENT 3 M	3	1 x 230 V ~	0.8	0.55	0.75	3.7
BOOSTERSILENT 3 M 1.5 BAR	3	1 x 230 V ~	0.8	0.55	0.5	3.7
BOOSTER SILENT 4 M	4	1 x 230 V ~	1	0.75	1	4.7
BOOSTER SILENT 5 M	5	1 x 230 V ~	1.25	1	1.36	5.7

MODEL	A	B	C	D	E	F	Ø G	H	H1	DNA GAS	DNM GAS	PACK DIMENSIONS			GROSS Kg	Q.TY x PALLET
												L/A	L/B	H		
BOOSTER SILENT 3 M	455	280	305	370	395	175	33	330	280	1"	1"	480	300	470	11.5	18
BOOSTERSILENT 3 M 1.5 BAR	455	280	305	370	395	175	33	330	280	1"	1"	480	300	470	11.5	18
BOOSTER SILENT 4 M	455	280	305	370	395	175	33	330	280	1"	1"	480	300	470	11.5	18
BOOSTER SILENT 5 M	455	280	305	370	395	175	33	330	280	1"	1"	480	300	470	11.5	18

JET - JETINOX - EUROINOX WITH ACTIVE DRIVER

AUTOMATIC INVERTER DRIVEN PRESSURISATION SYSTEM



TECHNICAL DATA

Operating range:

from 10 to 120 litres/min. with head up to 59 m.

Liquid quality requirements: clean, free from solid or abrasive contaminants, non-viscous, non-aggressive, uncrystallised and chemically neutral, close to the properties of water.

Liquid temperature range:

(for domestic use) from 0°C to 35°C

(for other uses) from 0°C to 40°C

Maximum ambient temperature: +40°C

Maximum operating pressure:

6 bar (600 kPa) for Jetcom AD1 and Eurocom AD1.

8 bar (800 kPa) for other models.

Installation: fixed in a horizontal position.

Motor protection rating: IP 44

Terminal block protection rating: IP 55

Insulation class: F

Standard input voltage: single phase 220/240 V / 50 Hz

Electric pump voltage: Three phase 220/240 V - 50 Hz

APPLICATIONS


Automatic booster sets, especially suitable for domestic use, small civil, farming or industrial installations, washing plants and leisure activities. These feature the use of JET, JETINOX, JETCOM and EUROINOX self-priming pumps, coupled directly to the Active Driver device.

The Active Driver is an innovative, variable speed integrated electric pump control system, able to maintain constant pressure with changing flow rates. Thanks to its simple and clear user interface, it is easy to calibrate operational pressure, view settings and any error messages. Active Driver comprises an inverter, a pressure sensor and a flow sensor.

MATERIALS

N°	PARTS *	MATERIALS
1	PUMP BODY	200 UNI ISO 185 CAST IRON (FOR JET)
		AISI 304 STAINLESS STEEL (FOR JETINOX AND EUROINOX)
3	FRAME	DIE CAST ALUMINIUM
4	IMPELLER	TECHNOPOLYMER A
7	SHAFT WITH ROTOR	AISI 416 STAINLESS STEEL X12 CrS13 - UNI 6900/71
16	MECHANICAL SEAL	CARBON/CERAMIC
28	OR GASKET	NBR RUBBER
160	VENTURI DIFFUSER NOZZEL GROUP	TECHNOPOLYMER A

* In contact with liquid

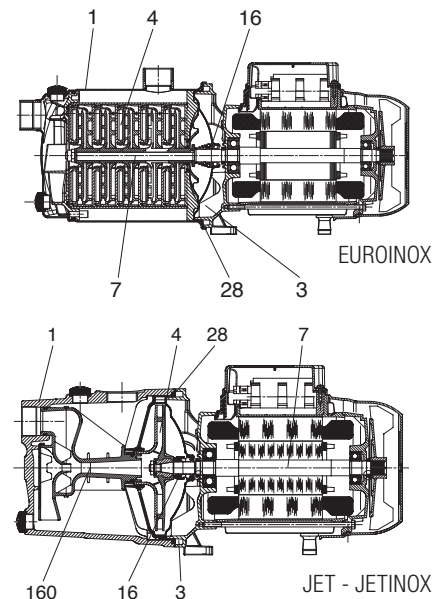

ACTIVE DRIVER

INVERTER



TECHNICAL DATA

Model: M/M model; M/T model; T/T model.

Max. motor phase current:

M/M model 14A; M/T model 10,5A; T/T model 13,5A.

Standard input voltage: M/M and M/T model 1x230V; M/M dual voltage 1x115V and 1x230V; T/T model 3x400V.

Electric pump voltage: M/M model 1x230V; M/M dual voltage model 1x115V and 1x230V; M/T model 3x230V; T/T model 3x400V.

Frequency: 50 Hz - 60 Hz.

Installation: vertical or horizontal. For T/T model only Vertical

Max. liquid temperature: 50°C.

Max. operational temperature: 60°C.

Max. pressure: 16 bar.

Aspiration diameter (DNA): 1 1/4" male.

Discharge diameter (DNM): 1 1/2" female.

Protection rating: IP55

Active Driver can also be used in parallel, Taht is a device for each electric pump (except model M/M 1.1)

APPLICATIONS

The units with Active Driver were designed and manufactured to meet the needs for **constant pressure** required by modern plumbing systems. Constant pressure regulation is applicable to many sectors: Water supply for irrigation, industry, hotels, housing construction, thermal baths. The basic concept that guided our Engineers in the development of these units was to manufacture a system that is **simple, flexible and reliable**.

ADVANTAGES

Constant pressure - Quiet operation - Economical - Reduced water consumption - Smaller footprint
(Expansion tanks not required) Less maintenance - dry-running protection

ACTIVE DRIVER NOTES

The Active Driver module is a complete system, which includes all fittings for connection to the plumbing plant, a pressure sensor, a flow sensor and an inverter. Active Driver, installed on the discharge side of **each electric pump** adjusts the rotation speed of its associated pump, to keep the water **pressure constant** even though the flow rate changes. The water flowing through the Active Driver fittings also aids in **cooling the heat** generated by the electronics.

OPERATION

Upon the first drop in pressure in the plant, caused by water being drawn, the pump is kept running to meet the required flow rate.

The pump pressure may be adjusted by the user using the + and - buttons on Active Driver (usually all of the pumps are set at the same pressure level).

The pumps stop automatically when there is:

Pump overload - dry-running - low voltage - Maximum pressure exceeded (adjustable) - Active Driver electronics overheating.

ACTIVE DRIVER FUNCTIONS DISPLAYED

Pump operational frequency (Hz) - Real-time pressure (bar) - Amperes absorbed by the pump - Alarms.

ACTIVE DRIVER EXTERNAL CONNECTIONS (models M/T 2.2 - T/T 3.0 - T/T 5.5 only)


Inputs: pump disabling, pressure switch, float against dry operation, second pressure setpoint.

Outputs: two terminals with no potential for signaling alarms, pump stop, pump running.


MODEL	MAX CURRENT MOTOR A	MAX POWER MOTOR KW	POWER SUPPLY 50 Hz	POWER SUPPLY ELECTRIC PUMP	DNA GAS	DNM GAS	INTERFACE FOR USE IN PARALLEL	USE WITH PUMP TYPE	ADJUSTMENT PRESSURE BAR
ACTIVE DRIVER M/M 1.1	8.5	1.1	SINGLE PHASE 1x230	SINGLE PHASE 1x230	1 1/4" M	1 1/2" F	NO	Surface pumps, submerged 4" and 5" with single phase motor with current draw up to 8.5 A	1-6
ACTIVE DRIVER M/M 1.5	11	0.55	SINGLE PHASE 1x115	SINGLE PHASE 1x115	1 1/4" M	1 1/2" F	SI	Surface pumps, submerged 4" and 5" with single phase motor with current draw up to 11 A	1-9
			1x230	1x230					
ACTIVE DRIVER M/M 1.8	14	1.0	SINGLE PHASE 1x115	SINGLE PHASE 1x115	1 1/4" M	1 1/2" F	SI	Surface pumps, submerged 4" and 5" with single phase motor with current draw up to 14 A	1-9
			1x230	1x230					
ACTIVE DRIVER M/T 1.0	4.7	1.0	SINGLE PHASE 1x230	Three-phase 3x230	1 1/4" M	1 1/2" F	SI	Surface pumps, submerged 4" and 5" with 230 V three-phase motor with current draw up to 4.7 A	1-5
ACTIVE DRIVER M/T 2.2	10.5	2.2	SINGLE PHASE 1x230	Three-phase 3x230	1 1/4" M	1 1/2" F	SI	Surface pumps, submerged 4" and 5" with 230 V three-phase motor with current draw up to 10.5 A	1-16
ACTIVE DRIVER T/T 3.0	7.5	3.0	Three-phase 3x400	Three-phase 3x400	1 1/4" M	1 1/2" F	SI	Surface pumps, submerged 4" and 5" with 400 V three-phase motor with current draw up to 7.5 A	1-16
ACTIVE DRIVER T/T 5.5	13.3	5.5	Three-phase 3x400	Three-phase 3x400	1 1/4" M	1 1/2" F	SI	Surface pumps, submerged 4" and 5" with 400 V three-phase motor with current draw up to 13.3 A	1-16

AD JET - AUTOMATIC INVERTER DRIVEN PRESSURISATION SYSTEM FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from 0 °C to +35 °C - Maximum ambient temperature: +40°C

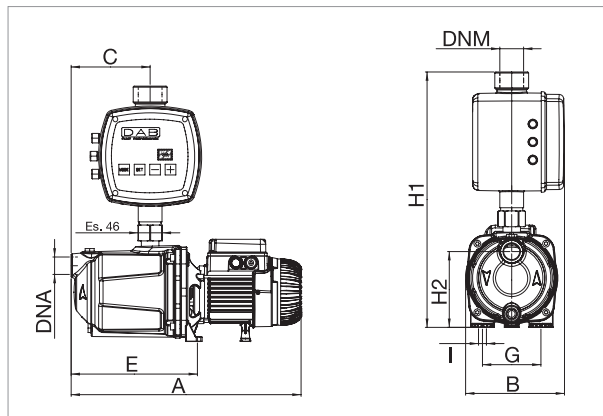

The performance curves are based on the kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

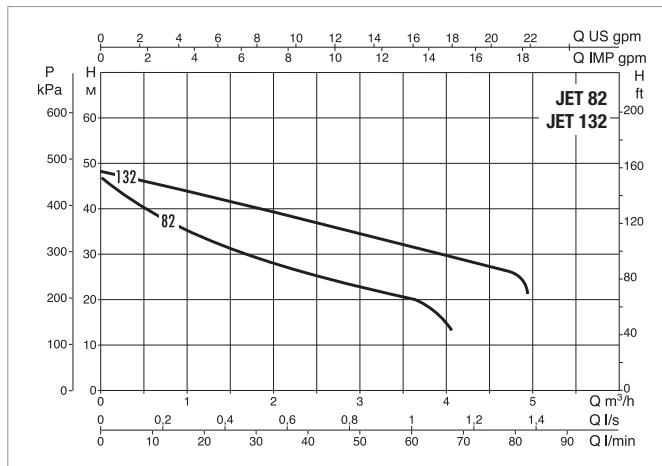


MODEL	POWER SUPPLY 50 Hz	P1 MAX kW	ELECTRICAL DATA				
			P2 NOMINAL		In A	CAPACITOR	
			kW	HP		µF	Vc
AD1.0 M/M JET 132M	1x220-240 V ~	1.49	1.0	1.36	6.6	25	450


MODEL	A	B	C	E	G	I	H1	H2	DNA GAS	DNM GAS	PACK VOLUME (mc)	GROSS WEIGHT Kg
AD1.0 M/M JET 132M	414	185	108	192	111	9	485	144	1"	1 1/2"	0.54	18.8

AD JETINOX - AUTOMATIC INVERTER DRIVEN PRESSURISATION SYSTEM FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from 0 °C to +35 °C - Maximum ambient temperature: +40°C

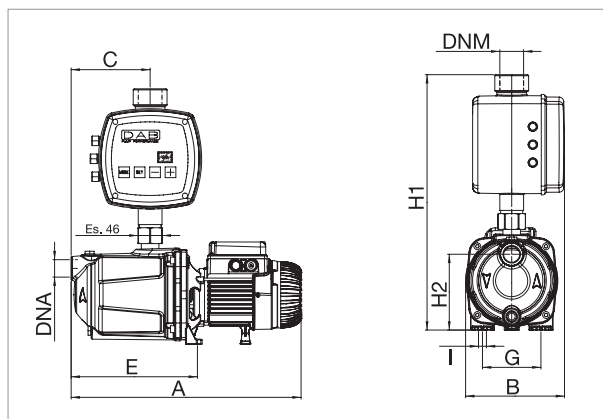

The performance curves are based on the kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

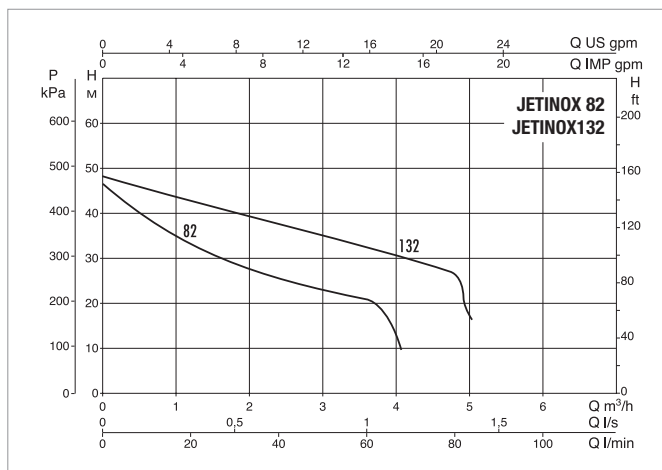


MODEL	POWER SUPPLY 50 Hz	P1 MAX kW	ELECTRICAL DATA				
			P2 NOMINAL		In A	CAPACITOR	
			kW	HP		µF	Vc
AD1.0 M/M JETINOX 132M	1x220-240 V ~	1.49	1	1.36	6.6	25	450


MODEL	A	B	C	E	G	I	H1	H2	DNA GAS	DNM GAS	PACK VOLUME (mc)	GROSS WEIGHT Kg
AD1.0 M/M JETINOX 132M	424	187	122	207	111	9	502	144	1"	1 1/2"	0.54	16.2

AD EUROINOX - AUTOMATIC INVERTER DRIVEN PRESSURISATION SYSTEM FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from 0 °C to +35 °C - Maximum ambient temperature: +40°C

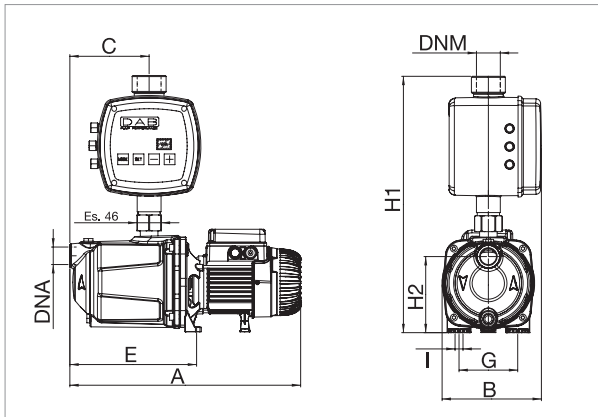

The performance curves are based on the kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

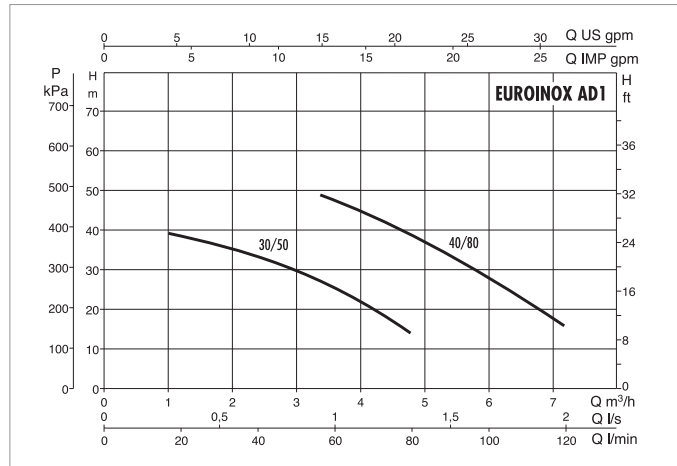

MODEL	ELECTRICAL DATA						
	POWER SUPPLY 50 Hz	P1 MAX kW	P2 NOMINAL		In A	CAPACITOR	
			kW	HP		µF	Vc
AD1.0 M/M EUROINOX 30/50M	1x220-240 V ~	0.88	0.55	0.75	3.9	12.5	450
AD1.0 M/M EUROINOX 40/80M	1x220-240 V ~	1.20	0.8	1.1	5.3	25	450

MODEL	A	B	C	E	G	I	H1	H2	DNA GAS	DNM GAS	PACK VOLUME (mc)	GROSS WEIGHT Kg
AD1.0 M/M EUROINOX 30/50M	378	187	95	235	111	9	485	144	1"	1 1/2"	0.54	16.8
AD1.0 M/M EUROINOX 40/80M	452	187	150	235	111	9	485	144	1"	1 1/2"	0.54	21.6

E.SYBOX

ELECTRONIC PRESSURISATION SYSTEM



TECHNICAL DATA

Operating range:

capacity up to 120 l/min; head up to 65 m.

Liquid quality requirements: clean, free from solid or abrasive contaminants, non-viscous, non-aggressive, uncrystallised and chemically neutral.

Liquid temperature range: from 0°C to +35°C for domestic use for other use: from 0°C to +40°C

Maximum suction depth: 8 metres - 7 metres 30/50 version

Maximum ambient temperature: +40°C

Maximum operating pressure: 8 bar (800 kPa)

Motor protection rating: IPX4

Insulation class: F

Insulation class: Horizontal or vertical fixed position

Special executions on request: alternative voltages and/or frequencies.

APPLICATIONS

E.SYBOX is DAB's integrated electronic water pressurisation system for domestic and residential use. The E.SYBOX inverter system provides the comfort of constant water pressure, while saving energy too. Suitable for use for potable water, in domestic plants for gardening and irrigation. Suitable for creating groups of up to 4 pumps. E.SYBOX requires no additional components for installation.

FEATURES


E.SYBOX comprises a self-priming, multi-stage pump with electronic inverter management, pressure and flow sensors, adjustable, high resolution LCD display and an integrated 2 litre expansion tank. May be installed either vertically or horizontally, in closed spaces without high level of air exchange. The accessories (e.sywall, e.sydock, e.sytwin, e.sytank) permit several installation possibilities.

The water-cooled motor, the protective and sound damping ABS hull, the anti-vibration feet and its electronics make this compact product very quiet (45dB under normal use). The wireless system enables the creation of other pressurisation groups able to connect with other DAB devices (eg. e.sylink).

MATERIALS

N°	PARTS *	MATERIALS
1	MOTOR FLANGE	TECHNOPOLYMER
2	ROTOR SHAFT	AISI 303 STAINLESS STEEL
3	MOTOR JACKET	AISI 304 STAINLESS STEEL
5	OR GASKET	NBR
7	SINTERED PLATE	AISI 304 STAINLESS STEEL
11	1" PLUG	TECHNOPOLYMER
13	SUCTION BODY	TECHNOPOLYMER
14	1" INSERT	NICKLED BRASS
15	SHUTTER	TECHNOPOLYMER
17	SPRING	AISI 303 STAINLESS STEEL
20	DIFFUSER	TECHNOPOLYMER
21	DIFFUSER BODY	TECHNOPOLYMER
22	IMPELLER	TECHNOPOLYMER
22c	SHIM RING	AISI 316 STAINLESS STEEL
24	NUT	AISI 316 STAINLESS STEEL
25	DIFFUSER END PLUG	TECHNOPOLYMER
27	MECHANICAL SEAL	CARBON IMPREGNATED RESIN/ SILICON CARBIDE / EPDM
28	PUMP BODY	TECHNOPOLYMER
30	DISCHARGE BODY	TECHNOPOLYMER
36	FLOW SWITCH BODY	TECHNOPOLYMER
41	PRESS. STABLE. IMPELLER	TECHNOPOLYMER
46	DISCHARGE MANIFOLD	TECHNOPOLYMER
47	1"1/4 PLUG	TECHNOPOLYMER
52	NON-RETURN VALVE	TECHNOPOLYMER/RUBBER/STEEL
57	TANK	TECHNOPOLYMER/RUBBER
58/1	PRESSURE SENSOR BODY	TECHNOPOLYMER



* In contact with liquid

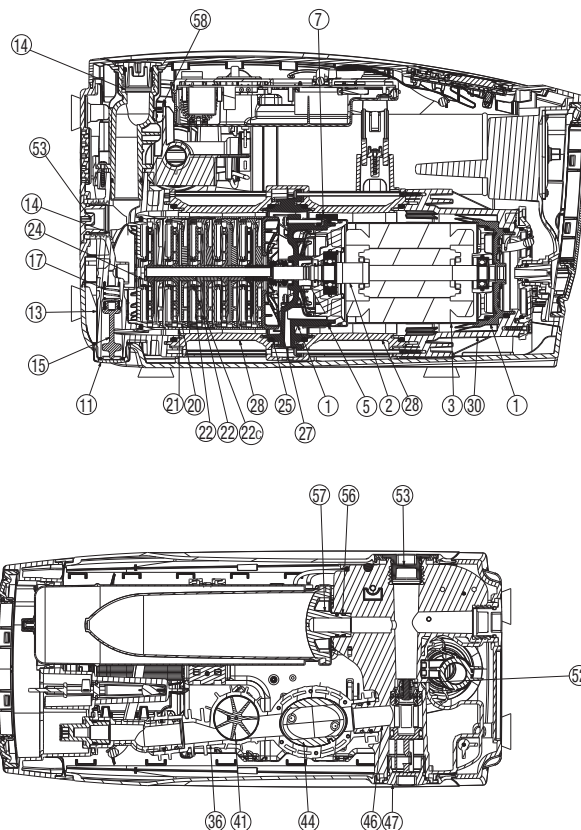

E.SYBOX - ELECTROIC PRESSURISATION SYSTEM FOR DOMESTIC WATER SUPPLY


Liquid temperature range: from 0°C to +35°C for domestic use - from 0°C to +40°C for other uses.

Maximum ambient temperature: +40°C

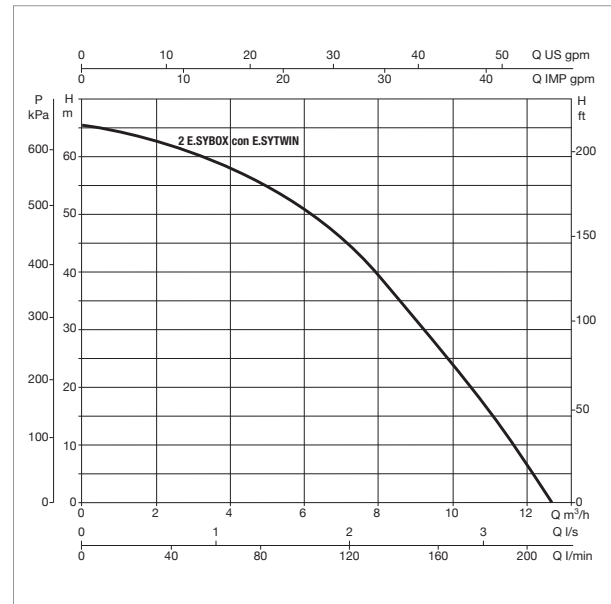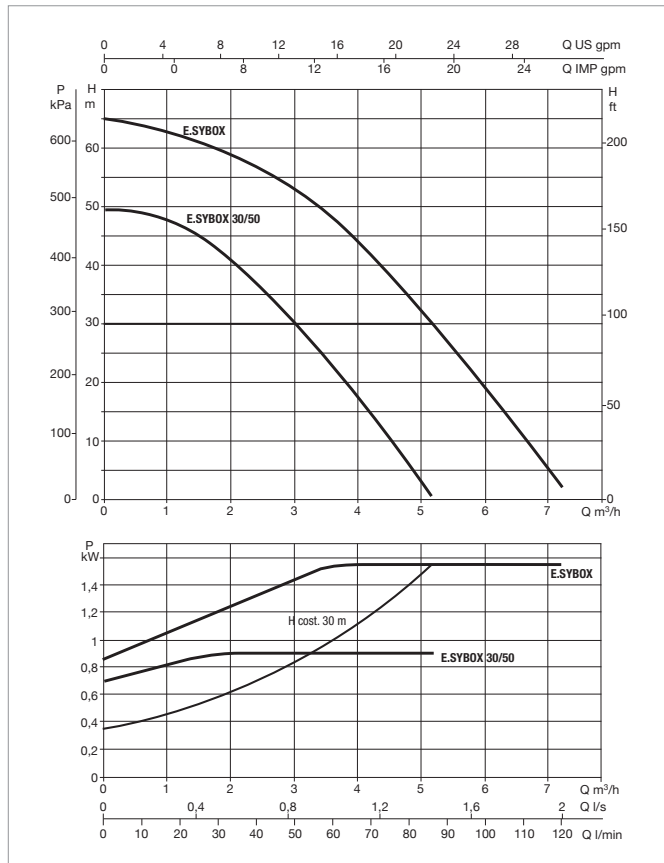

Performance refers to 2 assembled e.sybox in e.sytwin.
Pressure losses included

The performance curves are based on the kinematic viscosity values =
1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

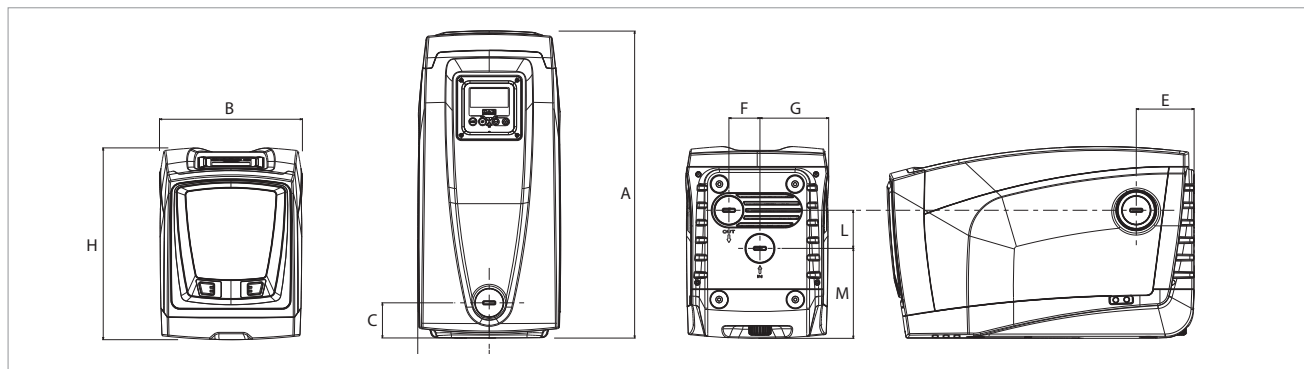

MODEL	Q=m ³ /h	0	0.6	1.2	1.8	2.4	3	3.6	4.2	4.8	5.4	6	6.6	7.2
	Q=l/min	0	10	20	30	40	50	60	70	80	90	100	110	120
E.SYBOX	H (m)	65	63.5	62	59.5	57	53	48	41.5	35	27.5	19	10	2
E.SYBOX 30/50	H (m)	50	49.5	47	43	37	30.5	23	14.5	6				

MODEL	ELECTRICAL DATA				
	N° IMPELLER	POWER SUPPLY 50/60 Hz	P1 MAX		In A
			kW	HP	
E.SYBOX	5	1 x 220 - 240V ~	1.55	2.11	10
E.SYBOX 30/50	3	1 x 220 - 240V ~	0.9	1.22	6.8

MODEL	A	B	C	D	E	F	G	I Ø	H	L	M	DNA	DNM	PACK DIMENSIONS			GROSS Kg
														L/A	L/B	H	
E.SYBOX	564	263	65	131.5	106	57	126.2	9	362	70	165.2	1"	1"	685	360	490	27
E.SYBOX 30/50	564	263	65	131.5	106	57	126.2	9	362	70	165.2	1"	1"	685	360	490	24

ACCESSORIES

E.SYBOX

		MODEL
 <p>293L x 318P x 180H</p>	<h2>E.SYDOCK</h2> <p>Because of the 4 hydraulic configurations available, installation is faster easier and more flexible. All required interfaces for connection to the plant are included. e.sybox quiet operation ids ensured by the anti-vibration feet included.</p>	
 <p>752L x 358P x 230H</p>	<h2>E.SYTWIN</h2> <p>This is the natural evolution of e.sydock, keeping all of its benefits, for the creation of twin pump groups. It gives exceptional performance due to the combined operation with 50% smaller footprint than any equivalent system.</p>	
 <p>870L x 595P x 1663H</p>	<h2>E.SYTANK</h2> <p>Tank, designed to best join with e.sybox, is equipped with:</p> <ul style="list-style-type: none"> • e.sydock (specific version) for quick connection. • suction tube with bottom valve • mains filler valve with float • overflow • discharge fittings • set up for ground anchor • inspection plug <p>Capacity 480 litres net with expansion available on 3 sides.</p>	
	<h2>E.SYWALL</h2> <p>Kit includes brackets, screws, plugs and two accessories for vibration absorption.</p>	
 <p>E.SYLINK KIT E.SYLINK LOW PRESSURE SWITCH</p>	<h2>E.SYLINK</h2> <p>Accessory equipped with wireless 802.15.4 interface, created to enable E.SYBOX to use 4 digital inputs (pressure switch, float, etc.), control 2 relay outputs (alarms, etc.) with the possibility of connecting an auxiliary pressure sensor.</p>	



1" 1/4 DISCHARGE AND SUCTION FITTINGS



293L x 345P x 679H





752L x 358P x 730H



ACCESSORIES



E.SYBOX

E.SYDOCK

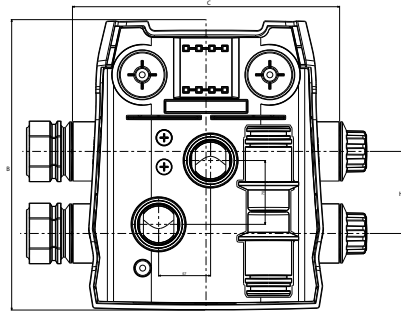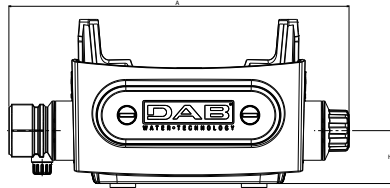


MODEL	A	B	C	H	H1	PACK DIMENSIONS			GROSS KG
						L/A	L/B	H	
E.SYDOCK	373	318.5	293	58	90	346	295	230	4

E.SYTWIN

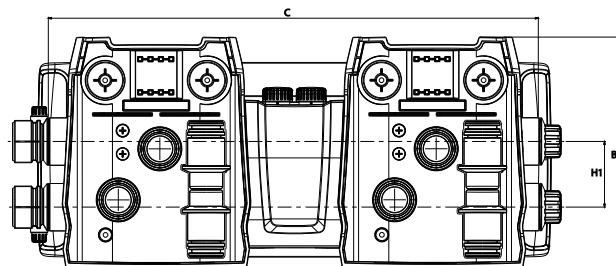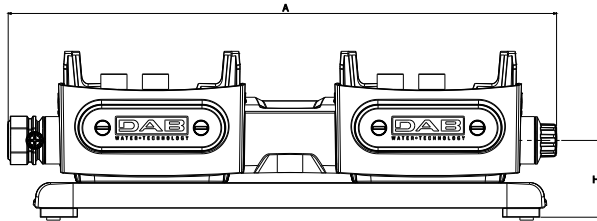


MODEL	A	B	C	H	H1	PACK DIMENSIONS			GROSS KG
						L/A	L/B	H	
E.SYTWIN - GAS	752	317	672	105.3	90	734	330	260	11.8

E.SYTANK

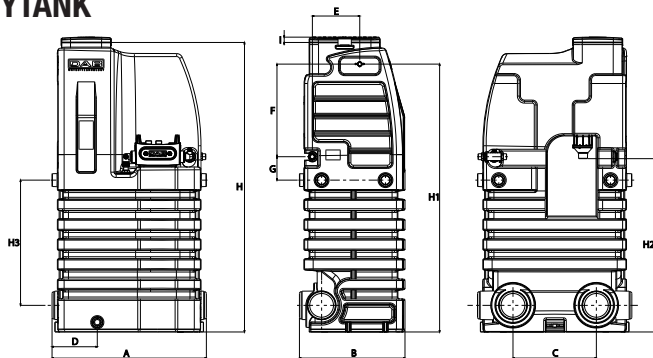

E.SYWALL

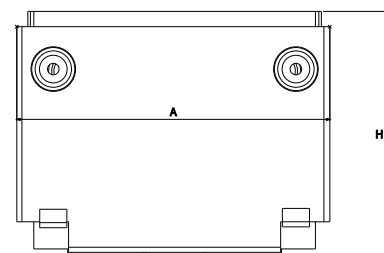

MODEL	A	B	C	D	E	F	G	H	H1	H2	H3	I
E.SYTANK	870	595	470	255	267	522	132	1632	1510	977	706	30

MODEL	a	H	PACK DIMENSIONS			GROSS KG
			L/A	L/B	H	
E.SYWALL	184.5	143.5	350	250	46	1

DESCRIPTION	PACK DIMENSIONS			GROSS KG
	L/A	L/B	H	
E.SYLINK - e.sylink + USB cable	150	148	98	0.22
E.SYLINK KIT - e.sylink + USB cable + 8DIN power box + power supply + 3 cable glands	275	360	200	1.9
E.SYLINK + PRESSURE SWITCH KIT - e.sylink KIT (see above) + low pressure switch kit	432	355	265	2.9

ACCUMULATION AND PRESSURISATION ASSEMBLY KIT



TECHNICAL DATA

Operating range:

From 10 to 120 litres/min. with head up to 72 m.

Liquid temperature range:

for domestic use: from 0°C to +35°C

Liquid quality requirements:

Suitable for potable water pursuant to EN1717 and EN13077 European standards.

Maximum ambient temperature: +40°C

Max. operational pressure: 8 bar (800 kPa) for surface pump configurations.

Max. inlet pressure: 6 bar

Protection rating:

IP44 for surface pumps.

IP68 for submerged pumps.

Insulation class: F

APPLICATIONS

The NBB pressurization system comprises a water accumulation tank and a pump (w or w/o inverter).

NBB is the solution for the creation of a pressurization system

for domestic use, where the mains pressure is not sufficient and a system with a water accumulation tank is required.

This is based on a modular concept. The kit comprises an NBB tank, a submerged or surface pump, an inverter - in the event the pump does not have integrated electronics - and an installation kit, including an expansion tank, where one is not integrated with the pump.

In all of its many configurations, NBB stands out because of its small size, its easy use and in the inverter version, its energy saving convenience.

FEATURES

NBB comprises:

- 280 litre tank for potable water, compliant with the EN1717 and EN13077 European standards
- fill and overflow valves pre-assembled
- protective screen included in the kit.

Using the kit for the addition of the auxiliary 280 litre tank, the connection tube with gaskets and clamps, the system capacity may be doubled.

In addition to the NBB, the user may choose an assembly kit that meets the needs of the specific type of pump or a pump + inverter being installed.


The pump and inverter are not included in the kit. they must be ordered separately.

The installation kit includes all required accessories for installing the pump and inverter on the NBB tank.

The Pulsar and Euroinox installation kits a 4 litre expansion tank is provided for.

NBB MATERIALS


N°	PARTS	MATERIALS
1	TANK	TECHNOPOLYMER
2	FLOAT	TECHNOPOLYMER
3	90° ELBOW	TECHNOPOLYMER
4	AERATOR	TECHNOPOLYMER
5	OVERFLOW TUBE	TECHNOPOLYMER

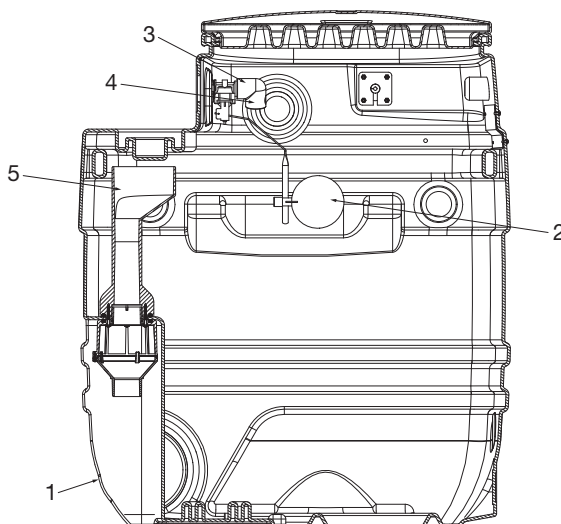

MATERIALS


NBB+Divertron

N°	PARTS	MATERIALS
1	NBB TANK	TECHNOPOLYMER
2	ANTIVIBRATION	NBR
3	REDUCER	BRASS
4	M/M EXTENSION	BRASS
5	90° FITTING	BRASS
6	FLEX HOSE	AISI 304 STAINLESS STEEL
7	STRAIGHT FITTING	BRASS
8	REDUCER SLEEVE	BRASS
9	BALL VALVE	BRASS

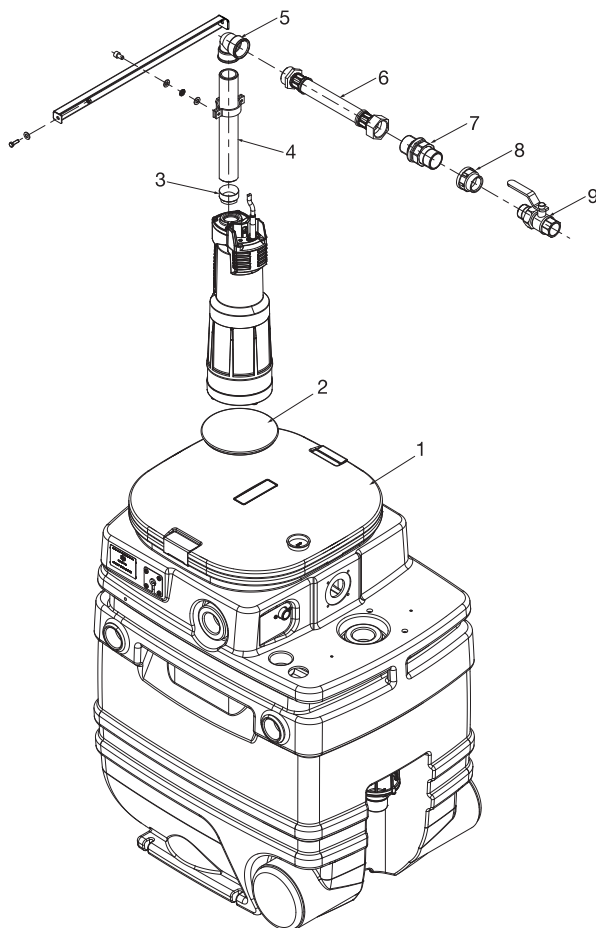

NBB+Euroinox


N°	PARTS	MATERIALS
1	NBB TANK	TECHNOPOLYMER
2	SUCTION TUBE	TECHNOPOLYMER/BRASS
3	CURVE FITTING	BRASS
4	M/M EXTENSION	BRASS
5	2 PIECE FITTING	BRASS
6	NIPPLE	BRASS
7	T FITTING	BRASS
8	5 LITRE EXPANSION TANK	5 LITRE STEEL EXPANSION TANK STAINLESS/RUBBER
9	BALL VALVE	BRASS

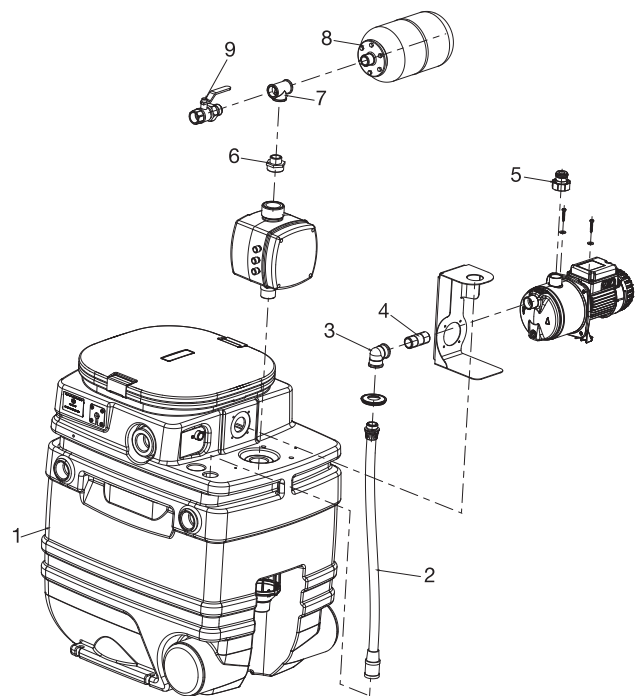

MATERIALS


NBB+Active

N°	PARTS	MATERIALS
1	TANK	TECHNOPOLYMER
2	SUCTION TUBE	TECHNOPOLYMER/BRASS
3	CURVE FITTING	BRASS
4	M/M EXTENSION	BRASS
5	THREAD-SAVER PLUG	TECHNOPOLYMER

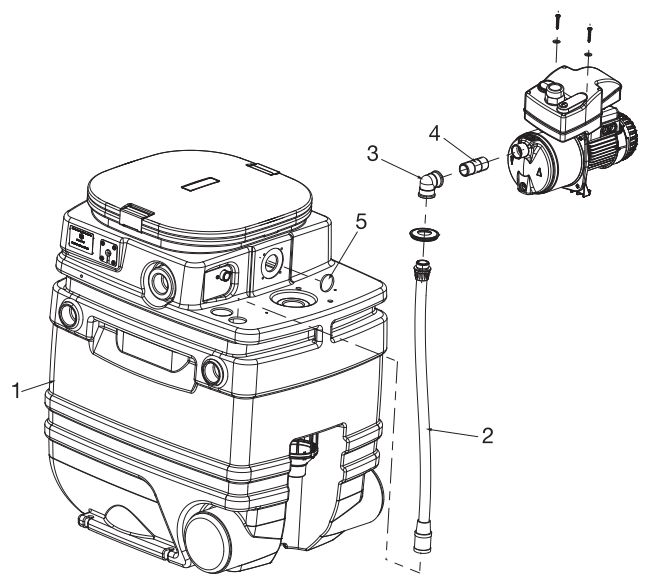



NBB+Pulsar

N°	PARTS	MATERIALS
1	NBB TANK	TECHNOPOLYMER
2	ANTIVIBRATION	NBR
3	NIPPLE	BRASS
4	COLLAR	STAINLESS/RUBBER
5	CHECK VALVE	BRASS
6	90° FITTING	BRASS
7	BRACKET	AISI 304 STAINLESS STEEL
8	SCREWS	A2 STAINLESS STEEL
9	FLEX HOSE	AISI 304 STAINLESS STEEL
10	STRAIGHT FITTING	BRASS
11	3 PIECE FITTING	BRASS
12	NIPPLE	BRASS
13	T FITTING	BRASS
14	5 LITRE EXPANSION TANK	STAINLESS/RUBBER
15	BALL VALVE	BRASS

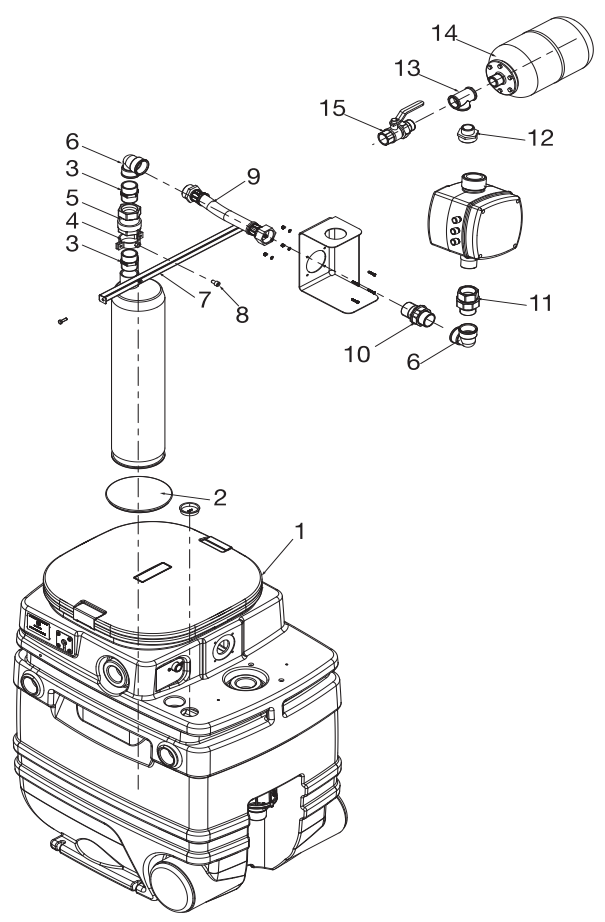

NBB ACCUMULATION AND PRESSURISATION ASSEMBLY KIT FOR DOMESTIC WATER SUPPLY

LIQUID TEMPERATURE RANGE PUMPED: FROM 0 °C TO +35 °C - MAXIMUM AMBIENT TEMPERATURE: +40°C

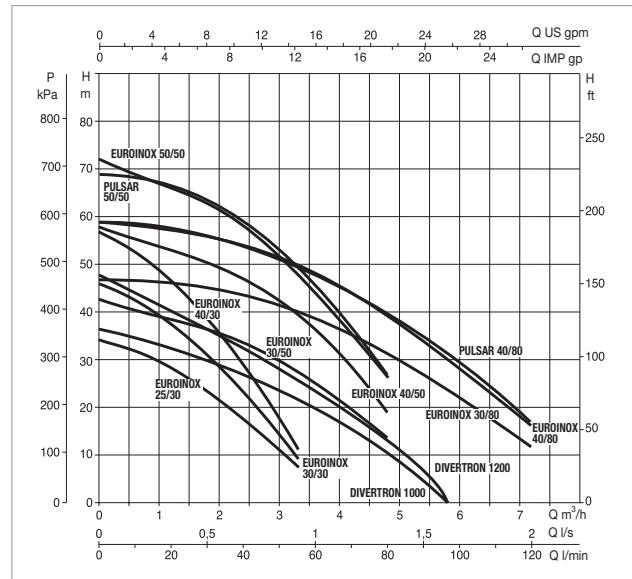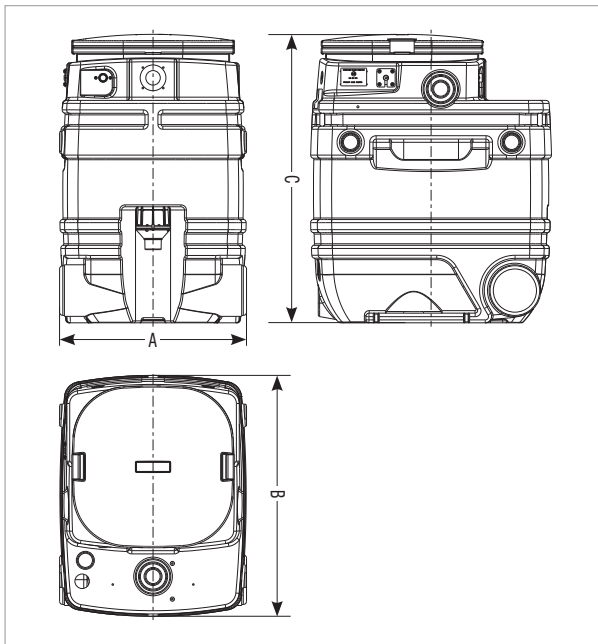


The performance curves are based on the kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	ELECTRICAL DATA						
	POWER SUPPLY 50 Hz	P1 MAX KW	P2 NOMINAL		In A	CAPACITOR	
			kW	HP		µF	Vc
EUROINOX M (all models)	1x220-240 V ~ 50Hz	0.5 / 1.5	0.37 / 1	0.5 / 1.36	2.4 / 6.5	-	-
EUROINOX T (all models)	3x230 V ~ 50Hz	0.9 / 1.5	0.55 / 1	0.75 / 1.36	2.8 / 4.4	-	-
EUROINOX EI (all models)	1x220-240 V ~ 50Hz	0.5 / 1.5	0.37 / 1	0.5 / 1.36	2.4 / 6.5	-	-
PULSAR 50/50 M	1x220-240 V ~ 50Hz	1.45	1	1.36	6.5	25	450
PULSAR 50/50 T	3x230 V ~ 50Hz	1.35	1	1.36	4.15	-	-
PULSAR 40/80 M	1x220-240 V ~ 50Hz	1.45	1	1.36	6.5	25	450
PULSAR 40/80 T	3x230 V ~ 50Hz	1.35	1	1.36	4.15	-	-
DIVERTRON 1200 M	1x220-240 V ~ 50Hz	1.1	0.75	1	4.7	12.5	450

MODEL	A	B	C	DNA GAS	DNM GAS	PACK DIMENSIONS			GROSS Kg
						L/A	L/B	H	
NBB	580	747	895	¾"	1"	590	790	910	16.9

ACTIVE SWITCH

PLANTS FOR USE OF RAINWATER

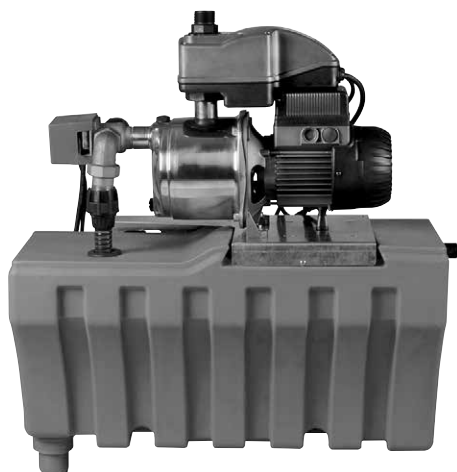

TECHNICAL DATA

- Max capacity (lt/min-m3/h):** 80-4.8
- Max head:** 42.2 m
- Max. Liquid temperature:** FROM +5°C TO +35°C
- Max. system pressure:** Max 6 bar
- Max. mains pressure:** Max 4 bar
- Minimum mains flow rate:** Min 10 lt/min
- Maximum height of the highest point of use:** 15 m
- Power supply:** Volt 220-240 Hz50
- Maximum power absorbed:** 880 W
- Protection rating:** IP 20
- Ambient temperature:** Min +5 °C Max +40 °C
- Tank materials:** PE
- Mains inlet pipe dimensions:** 3/4"
- Discharge pipe dimensions:** 1"
- Suction pipe dimensions:** 1"
- Overflow pipe dimensions:** DN 50
- Max Altitude:** 1000 metres
- Water type:** ph 4-9
- ON/OFF float version:** ON/OFF float with 20 metre cable
- Dry weight in Kg:** 15
- Operational weight in Kg:** 30

APPLICATIONS


The ACTIVE SWITCH unit is used for rainwater management. The unit detects a lack of water in the collection system, whether from rainwater or the mains and makes corrections to ensure proper operation of the plant (that is, it does not ever leave the connected utilities dry). Generally, this system is reserved for irrigation, clothes washing, WC flushing and floor cleaning applications. The primary purpose of the ACTIVE SWITCH system is to give use of the rainwater priority over the use of the mains water. When there is not enough rainwater in the collection tank, the control unit switches over to the mains, ensuring that the connected use points are supplied (PLEASE, NOTE the water supplied by this system is not potable). The connection between the rainwater collection tank and the mains water collection tank in this system is selected by way of a three-way valve installed on the suction side of the pump. Pump operation is precisely that of a "start-stop" system with pressure and flow control. When the pressure drops below a certain threshold level, the pump starts up. Upon closing the tap, the pump stops. If the water runs out, the pump stops and signals a fault on the pump control panel. After a set time, the pump starts back up again automatically. If all the functions' parameters have returned to normal, then the system runs normally. The system is also equipped with a special anti-odour anti-emptying siphon.

TECHNICAL SPECIFICATIONS


The system comprises a polyethylene (PE) console and an ACTIVE EI 30/50M electric centrifugal pump. The kit also includes a wall mount bracket and a water level sensor with 20 metres of cable.

MATERIALS

N°	PARTS	MATERIALS
1	PUMP CONTROL PANEL	SEE ACTIVE SYSTEM
2	PRESSURISED WATER OUTLET	PA 6.6 + 30% F.V.
3	RAINWATER SUCTION	STEEL HOSE
4	3-WAY VALVE	VALVE BODY: BRASS RETURN SPRINGS: STEEL MOTOR COVER SELF-EXTINGUISHING ABS
5	RAINWATER COLLECTION TANK	PE
6	OVERFLOW DRAIN SIPHON	PP HOMOPOLYMER
7	PUMP	SEE EUROINOX
8	MAINS WATER INLET	STEEL HOSE
9	PUMP LOAD PLUG	PPE / O-R IN NBR

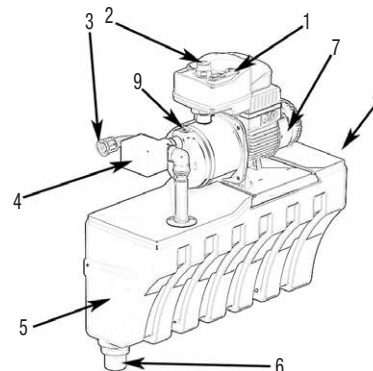

INSTALLATION DIAGRAM

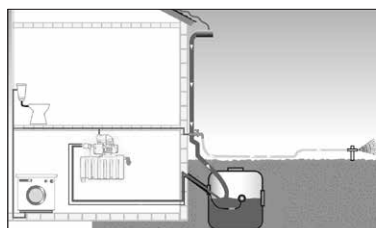

CONTROL PANEL




ACTIVE SWITCH

PLANTS FOR USE OF RAINWATER

PERFORMANCE RANGE

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

GRAPHIC SELECTION TABLE


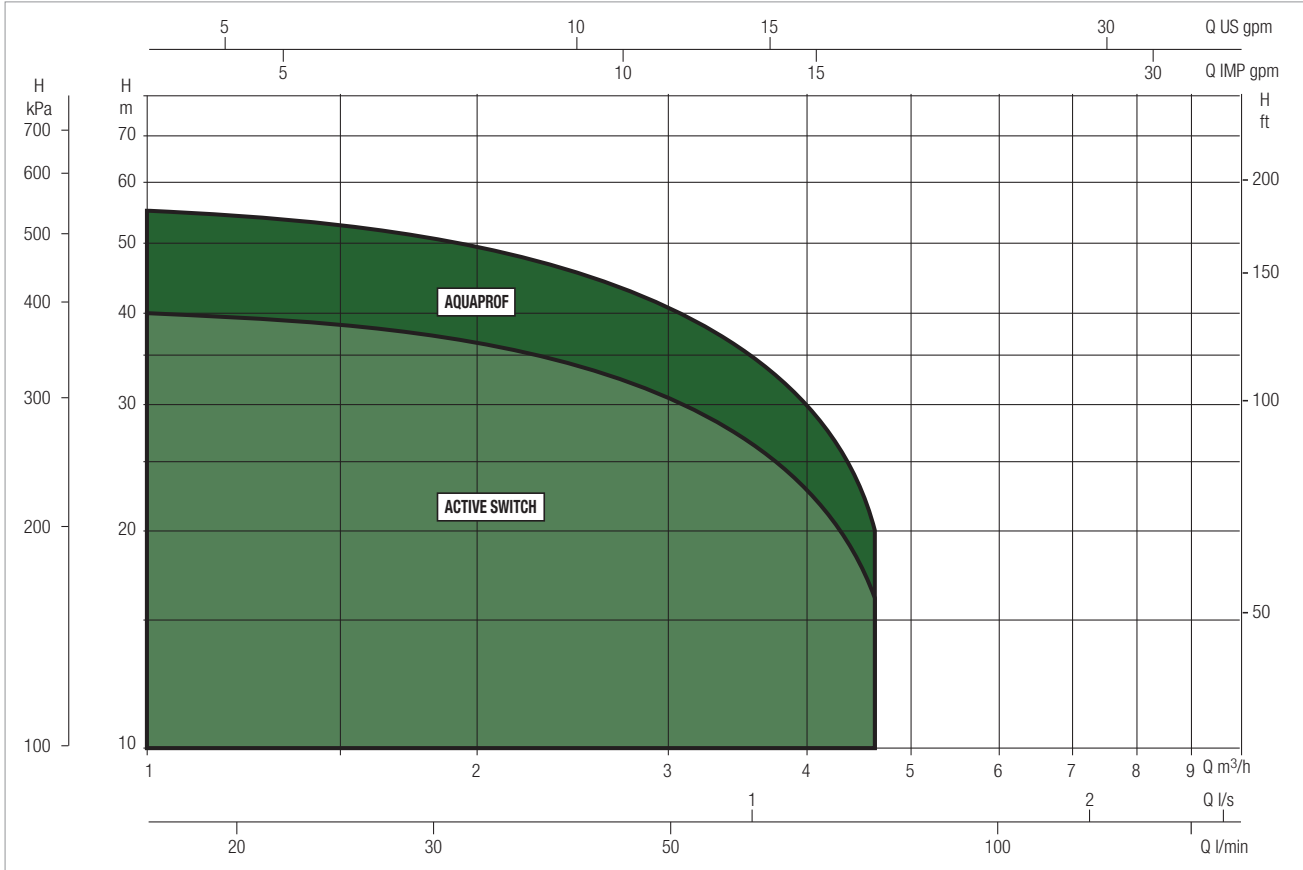


ACTIVE SWITCH SELECTION TABLE

MODEL	Q=m ³ /h	0	0.6	1.2	1.8	2.4	3.0	3.6	4.2	4.8
	Q=l/min	0	10	20	30	40	50	60	70	80
ACTIVE SWITCH 30/50 M	H (m)	42.2	40.2	38.2	36.2	33.8	30	24.8	19.5	14

ACTIVE SWITCH - PLANTS FOR USE OF RAINWATER FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from +5 °C to +35 °C - Maximum ambient temperature: +40°C

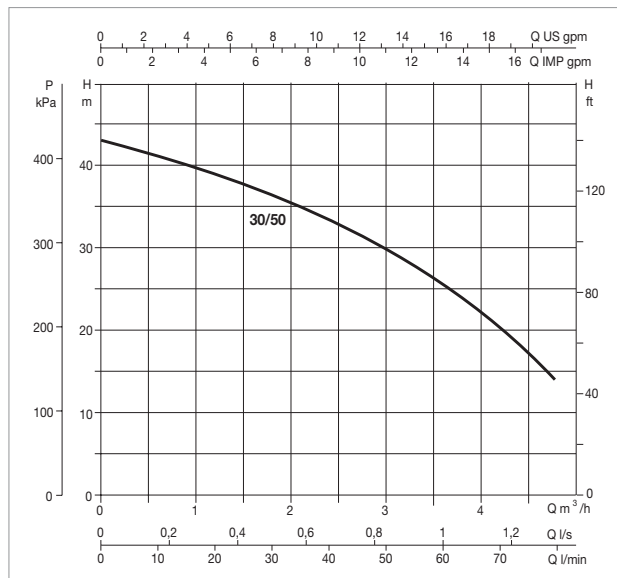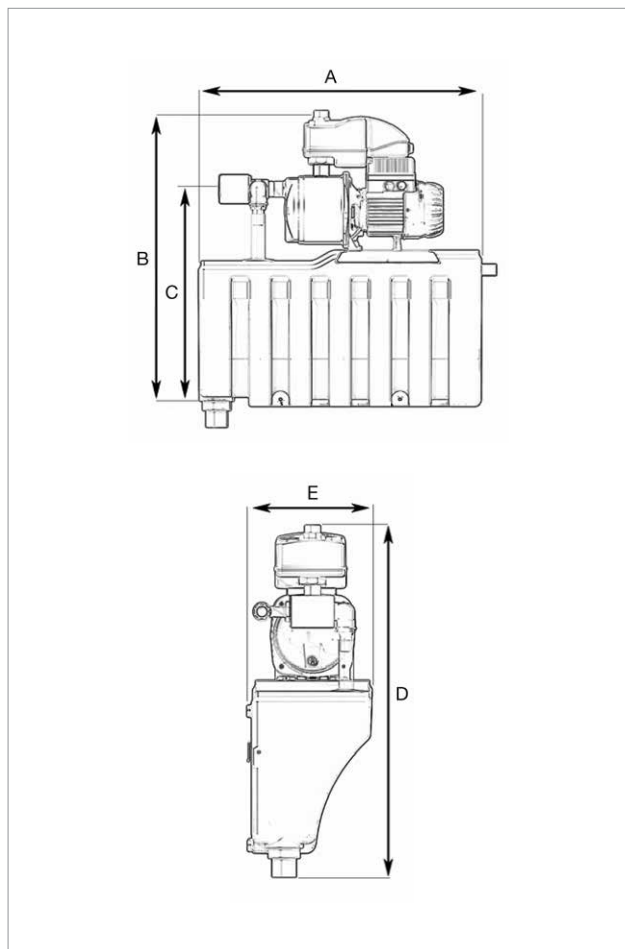

The performance curves are based on the kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	ELECTRICAL DATA						
	POWER SUPPLY 50 Hz	P1 MAX kW	P2 NOMINAL		In A	CAPACITOR	
			kW	HP		µF	Vc
ACTIVE SWITCH 30/50 M	1x220-240 V ~	0.880	0.55	0.75	3.9	12.5	450

MODEL	A	B	C	D	E	DNA GAS	DNM GAS	GROSS Kg	No. PIECES PALLET
ACTIVE SWITCH 30/50 M	650	666.5	501.5	731.5	260	1"	1"	18	4

AQUAPROF

PLANTS FOR USE OF RAINWATER



TECHNICAL DATA

Max flow rate (lt/min-m³/h): 85-5.1

Max head: 48 m

Max. Liquid temperature: From +5°C to +35°C

Max. system pressure: Max 6 bar

Max. mains pressure: Max 4 bar

Minimum mains flow rate: Min 10 lt/min

Maximum height of the highest point of use: 12 m

Power supply: Volt 230 Hz50

Maximum power absorbed: W 1000

Protection rating: IP 42

Ambient temperature: Min +5°C Max +40°C

Cabinet materials: PPE

Tank materials: PE

Mains inlet pipe dimensions: 3/4"

Discharge pipe dimensions: 1"

Suction pipe dimensions: 1"

Overflow pipe dimensions: DN 50

Max Altitude: 1000 metres

Max power Pump No. 2 relay: 3'A_250Volt

Water type: ph 4-9

ON/OFF float version: ON/OFF float with 20 metre cable

version with electronic transducer water level indicator: electronic transducer (4-20 mA 8-28 V DC) w/20 metres of cable

Dry weight in Kg: 20

Operational weight in Kg: 35

APPLICATIONS

The AQUAPROF unit is used for rainwater management and distribution. The unit detects any faults in the water collection system, whether from rainwater or the mains and makes corrections to ensure proper operation of the plant (that is, it does not ever leave the connected utilities dry). It signals any faults and displays the problem detected. Generally, this system is reserved for irrigation, clothes washing, WC flushing and floor cleaning applications. The primary purpose of the AQUAPROF system is to give use of the rainwater priority over the use of the mains water. When there is not enough rainwater in the collection tank, the control unit switches over to the mains, ensuring that the connected use points are supplied (PLEASE, NOTE the water supplied by this system is not potable). The connection between the rainwater collection tank and the mains water collection tank in this system is selected by way of a three-way valve installed on the suction side of the pump. Pump operation is precisely that of a "start-stop" system with pressure and flow control. When the pressure drops below a certain threshold level, the pump starts up. Upon closing the tap, the pump stops. If the water runs out, the pump stops and signals a fault on the pump control panel. After a set time, the pump starts back up again automatically. If all the functions' parameters have returned to normal, then the system runs normally. The system is also equipped with a special anti-odour anti-emptying siphon. Every 24 hours, the system checks the operation of the 3-way valves. Every week, the system completely changes the water contained in the mains water collection tank (the change is restricted by the user's water use requirements).


TECHNICAL SPECIFICATIONS

The system comprises a polypropylene (PPE) foam console and either a EUROINOX 30/50M or a EUROINOX 40/50M electric centrifugal pump. The kit also includes a wall mount bracket and a water level sensor with 20 metres of cable for the AQUAPROF BASIC model ON/OFF version. While for the AQUAPROF TOP version there is an electronic transducer (with a 5 m full scale 4-20 mA 8-28 VDC). With tanks that are less than 2 metres deep, it is suggested that a dedicated sensor with a 2 - 2.5 metre resolution be purchased separately.

PERFORMANCE RANGE

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

GRAPHIC SELECTION TABLE

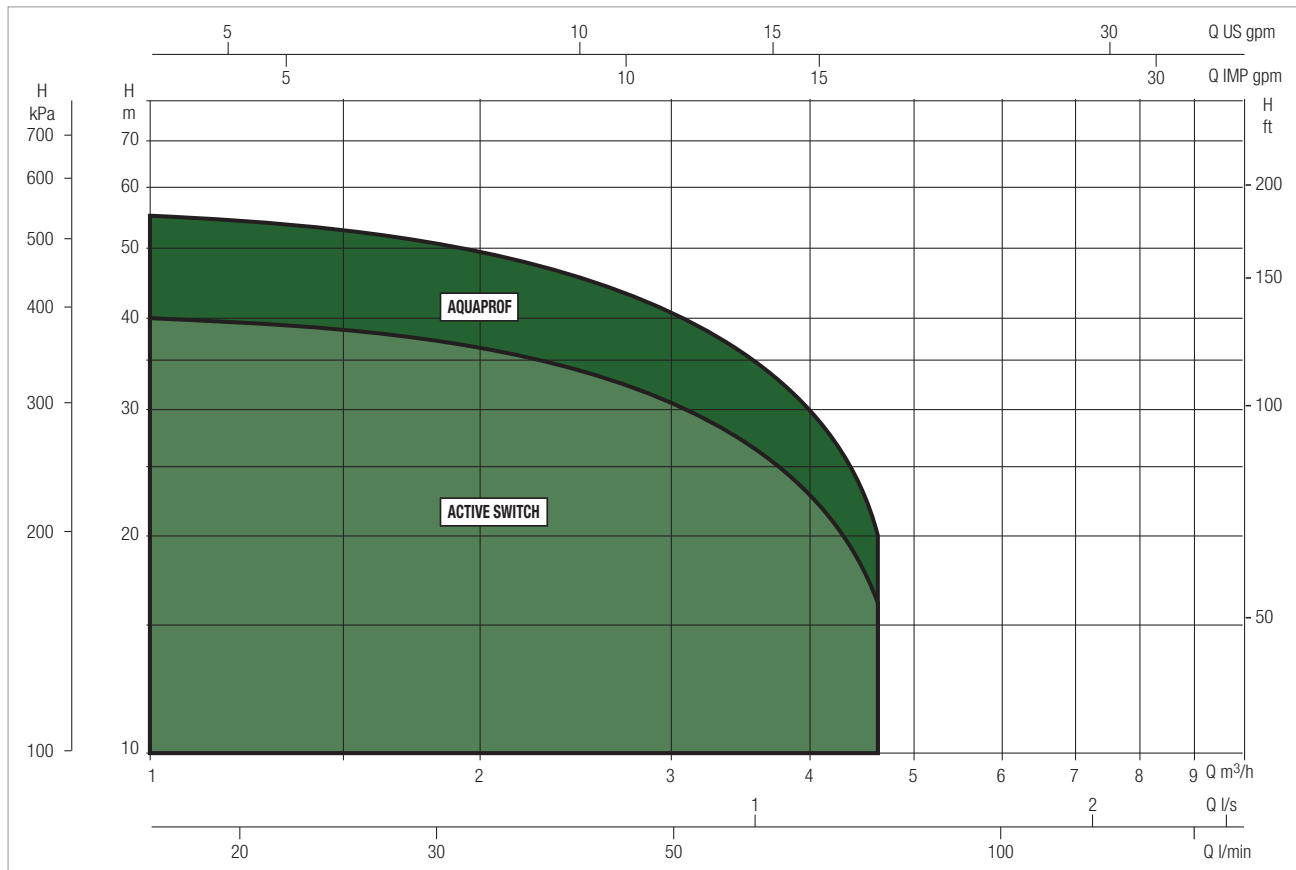

AQUAPROF SELECTION TABLE


MODEL	Q=m ³ /h	0	0.6	1.2	1.8	2.4	3.0	3.3	3.6	4.2	4.8
	Q=l/min	0	10	20	30	40	50	55	60	70	80
AQUAPROF BASIC 30/50	H (m)	42.2	40.2	38.2	36.2	33.8	30	27.5	24.8	19.5	14
AQUAPROF BASIC 40/50		57.7	55.3	52.8	50.1	47.1	42.7	39.5	35.8	28	19.2
AQUAPROF TOP 30/50		42.2	40.2	38.2	36.2	33.8	30	27.5	24.8	19.5	14
AQUAPROF TOP 40/50		57.7	55.3	52.8	50.1	47.1	42.7	39.5	35.8	28	19.2

AQUAPROF


PLANTS FOR USE OF RAINWATER

MATERIALS

N°	PARTS	MATERIALS
1	MAINS WATER TANK	LLDPE
2	MAINS WATER INLET	METAL HOSE
3	CONTROL PANEL	-
4	3-WAY VALVE	VALVE BODY: BRASS RETURN SPRINGS: STEEL MOTOR COVER SELF-EXTINGUISHING ABS
5	PUMP	EUROINOX
6	CONTROL SYSTEM HYDRAULIC PUMP	POM / NBR / STEEL
7	ANTI-DRIP EXPANSION TANK	DIPHHRAGM WITH HIGH CHLOROBUTYL CONTENT
8	WARM AIR VENT	-
9	RAINWATER SUCTION	BRASS
10	AIR INTAKE PUMP COOLING	-
11	PRESSURISED WATER OUTLET	METAL HOSE
12	REAR CLADDING	PP FOAM
13	EMERGENCY OVERFLOW	-
14	PRESSURE GAUGE	-
15	HORIZONTAL OUTLET	BRASS
16	CHANNEL FOR HOSES AND ELECTRIC CABLES	-
17	FLOAT VALVE	PA 66 / STEEL / POLYSTYRENE
18	PUMP LOAD PLUG	PPE / O-R IN NBR
19	CHECK VALVE	BRASS

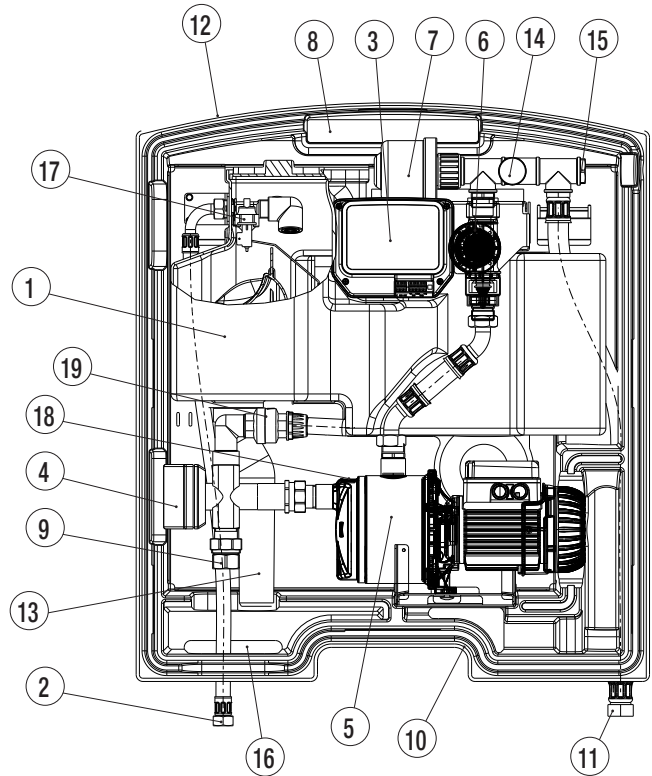

CONTROL PANEL

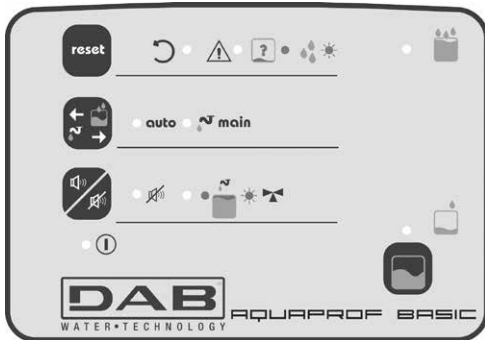


AQUAPROF BASIC





AQUAPROF TOP

INSTALLATION DIAGRAM AQUAPROF BASIC AND TOP

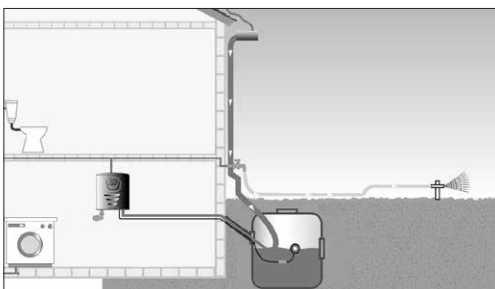

AQUAPROF - PLANTS FOR USE OF RAINWATER FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from +5 °C to +35 °C - Maximum ambient temperature: +40°C

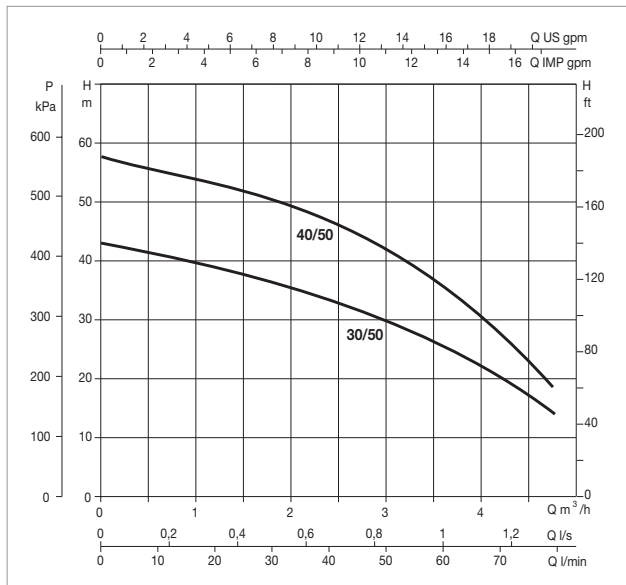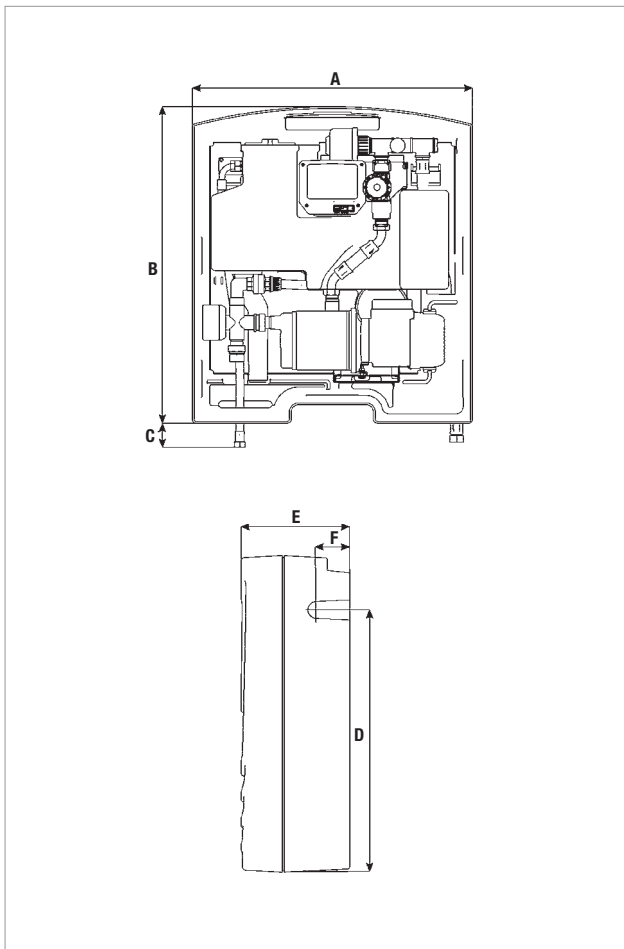

The performance curves are based on the kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	ELECTRICAL DATA							
	N° IMPELLER	POWER SUPPLY 50 Hz	P1 MAX KW	P2 NOMINAL		In A	CAPACITOR	
				kW	HP		µF	Vc
AQUAPROF BASIC 30/50	3	1x220-240 V ~	0.88	0.55	0.75	3.9	12.5	450
AQUAPROF BASIC 40/50	4	1x220-240 V ~	1.2	0.75	1	5.3	20	450
AQUAPROF TOP 30/50	3	1x220-240 V ~	0.88	0.55	0.75	3.9	12.5	450
AQUAPROF TOP 40/50	4	1x220-240 V ~	1.2	0.75	1	5.3	20	450

ACCESSORIES

ACCESSORIES

SELF-PRIMING CENTRIFUGAL PUMPS

EXPANSION TANKS		DESCRIPTION
<p>100/310/450 LITRI V 20/60 LITRES H 2/8/18 LITRES V</p>		2 LITRE 10 BAR V TANK- G
		8 LITRE 10 BAR V TANK- G
		18 LITRE 10 BAR V TANK- G
		18 LITRE 16 BAR V TANK- G
		20 LITRE 10 BAR H TANK- G
		60 LITRE 10 BAR H TANK- G
		100 LITRE 10 BAR V TANK - G
		310 LITRE 10 BAR V TANK - G
		450 LITRE 10 BAR V TANK - G

AQUABOX ASSEMBLY KIT	DESCRIPTION	QUANTITY FOR PACKAGING
	AQUABOX OR ASSEMBLY KIT 25/20	1
	AQUABOX "H" 60 ASSEMBLY KIT	1



AQUABOX ASSEMBLY KIT	DESCRIPTION	QUANTITY FOR PACKAGING
	MEMBRANE FOR AQUABOX V. 8 LITRES BUTYL	1
	MEMBRANE FOR AQUABOX V. 20 LITRES /16 BAR	1
	MEMBRANE FOR AQUABOX 19-20 LITRES BUTYL	1


PRESSURE GAUGES	DESCRIPTION	QUANTITY FOR PACKAGING
	PRESSURE GAUGE ASS. 6 BAR D.50 ATT.¼"	100
	PRESSURE GAUGE ASS.12 BAR D.63 ATT.¼"	100
	PRESSURE GAUGE RAD. 12 BAR D.63 ATT.¼"	100


PRESSURE SWITCH	DESCRIPTION	QUANTITY FOR PACKAGING
	PRESSURE SWITCH 6 BAR	10
	PRESSURE SWITCH 6 BAR - XMP	10
	PRESSURE SWITCH 12 BAR - XMP	10
	RUN DRY PROTECTION PRESSURE SWITCH	-


ACCESSORIES

SELF-PRIMING CENTRIFUGAL PUMPS

FITTINGS	DESCRIPTION	QUANTITY FOR PACKAGING
	3 WAY BRASS FITTING 1"	125
	5 WAY BRASS FITTING 1"	100

FOOT VALVE	DESCRIPTION	QUANTITY FOR PACKAGING
 FOOT VALVE 3/4"	FOOT VALVE 3/4"	10
	FOOT VALVE 1"	10
	FOOT VALVE 1 1/4"	5

CHECK VALVES	DESCRIPTION	QUANTITY FOR PACKAGING
 CHECK VALVE 3/4"	CHECK VALVE 3/4"	14
	CHECK VALVE 1"	10
	CHECK VALVE 1 1/4"	8
	CHECK VALVE 1 1/2"	-
	CHECK VALVE 2"	-

CONTROLLER	DESCRIPTION	QUANTITY FOR PACKAGING
 CONTROLLER 1.5	CONTROLLER 1.5 NO CABLE	1.2
	CONTROLLER 1.5 NO CABLE	1.5
	CONTROLLER 1.5 NO CABLE	2.2
	CONTROLLER 1.5 WITH CABLE	1.2
	CONTROLLER 1.5 WITH CABLE	1.5
	CONTROLLER 1.5 WITH CABLE	2.2

TECHNICAL ANNEX

GENERAL INFORMATION

BASIC TERMS USED WITH PUMPS

Below, in current language, there are listed the meanings of the basic terms used when talking about hydraulic pumps. The figures will be expressed in technical units of measure, referring to the conversion table in International and English measurement units.

HEAD

Head refers to height, difference in level or height. When talking about a pump with a capacity of Q litres per second and a head of 30 metres, this means that the pump has the capacity to lift Q litres 30 metres (that is surpass a difference of height of 30 metres) per second. For a given pump, the head is linked to its manufacturing characteristics such as external diameter of the impeller and rotation speed, while it is independent of the liquid pumped. This means that the pump is capable of raising Q litres per second equally, of water, petrol or mercury; only the power of the motor will be different for the three substances.

SPECIFIC WEIGHT OF A LIQUID OR FLUID

Specific weight of a liquid is the unit volume of that liquid/fluid. Specific weight is usually expressed in Kg/dm³ or Kg/l given that one dm³ is equal to 1 litre.

PRESSURE

By pressure means the weight per unit of surface (eg, Kg/cm²); this is a term that should not be confused with head. Indeed, in the case of fluids, the pressure that a fluid exerts on a surface is given by the product of the head (or height) of the fluid itself multiplied by its specific weight. Therefore, the thickness of several Km of air on the earth's surface produces a pressure of about 1 Kg/cm² (equal to about 1 atmosphere) at the earth's surface. If the same thickness were to be of water instead of air, the pressure at the earth's surface would be between 700-800 greater. This is because the specific weight of water is between 700-800 times greater than that of air.

Keeping in mind that a 10 metre high column of water equals about 1 Kg/cm², based on what was said, by installing a pressure gauge on the discharge outlet of a pump, the following pressure increases would be measured:

- | | | |
|-----------------|--|---|
| a) with petrol | (specific weight 00.7 Kg/dm ³) | = 00.7 x 0.001 x 30 x 100 = 02.1 Kg/cm ² |
| a) with water | (specific weight 01.0 Kg/dm ³) | = 00.1 x 0.001 x 30 x 100 = 03.0 Kg/cm ² |
| a) with mercury | (specific weight 13.6 Kg/dm ³) | = 13.6 x 0.001 x 30 x 100 = 40.8 Kg/cm ² |

FLOW RATE

What is meant by flow rate is the quantity of liquid or fluid that passes over a surface, such as the discharge outlet of a pump, or the cross section of a pipe, etc., over a unit of time.

Depending on the quantities used, there may be litres per minute, (l/min), litres per second (l/s) cubic metres per hour (m³/h) etc.

It is necessary to understand that there is a perfect analogy between electricity and hydraulics. One merely needs to recall that hydraulic head is equal to the quantities referring to the difference in potential or voltage in electronics and the hydraulic flow rate is similar to the intensity of the current or amperage. Even the behaviour of these quantities is identical. Actually, a wire or cable that is too thin does not aid current flow in the same manner that a pipe that has too small a diameter does not favour the flow of a liquid. Just like the flow of electrical current through a wire to a cable requires a difference in voltage, in the same manner the flow rate of a liquid or fluid through a pipe requires a certain amount of head.

There will never be movement of a liquid between two points in a perfectly horizontal pipe with both having the liquid at the same head. This is linked to the fact that, since the cable gives a certain resistance to the flow of the electrical current (electrical resistance), so does the pipe offer a certain amount of resistance to the flow of the fluid. This resistance depends on the quality of the pipe (material, shape, presence of scale, etc.), its cross section or rather the speed that the fluid flows through the pipe. This resistance is called Head Loss.

HEAD LOSS

What is meant by head loss is that part of the head, possessed by the liquid, lost in the flow through a tube or a valve or filter, etc. This head loss cannot be recovered because it is a loss due to friction. Returning to the analogy between electrical and hydraulic phenomena, since the losses in a cable become greater with more electric current flowing through it, head loss is greater as the speed of the fluid increases, and therefore as the diameter of the pipe decreases or how much the valve creates a bottleneck or how fouled the filter.

PUMP

This is a machine that gives a liquid going through it a certain head. This head may be used to take the liquid to a higher level or to travel a certain distance either in a pipe or in the air. The characteristics of a pipe are

- a) **flow rate** (the quantity of liquid moved over a period of time)
- b) **head** (the height that the machine can raise the flow rate)

Depending on the ratio between flow rate and head there may be:

- a) pumps with large head and small flow rates (piston pumps, rotating pumps, small centrifugal pumps)
- b) pumps with medium head and flow rates (centrifugal pumps in general)
- c) pumps with large flow rates and small head (axial flow centrifugal pumps and propeller pumps)

TECHNICAL ANNEX

ELECTRONIC IN-LINE PUMPS

Centrifugal pumps, axial flow centrifugal pumps and propeller pumps are rotary driven and their speed is universally measured in revolutions per minute RPM. For these machines working at a given speed, for each flow rate value there is only one head value. This means that if this type of pump performance is to be increased or decreased its operational speed must be increased or decreased. Essentially, the liquid that flows through a pump is given energy linked to the head and the speed of the same liquid. This energy provided in a unit of time is called the power output.

POWER OUTPUT

What is meant by power output is the power supplied by the same pump. The level of this power depends on three quantities: flow rate, the head and the specific weight of the liquid pumped. The larger these three factors are, the greater the power output of the pump will be. For example, a pump dispensing petrol does less work than one dispensing sulphuric acid, precisely because the specific weights or densities of the two liquids are different. The pump the liquid, the pump must be turned by a motor, which is either electric or internal combustion. Electric motors use electric power. Internal combustion engines use petroleum distillates or gas. The power needed by the pump to work is called the absorbed power.

CALCULATION OF THE POWER OUTPUT

Usually the output power by a pump is expressed in kW or HP, indicating:

Q = flow rate

H = the head in a column of liquid (m.l.c. [meter liquid column])

γ = specific weight (density)

Power output (P3) is given by:

$$P_3 = \frac{\gamma \text{ (kg/dm}^3\text{)} \times Q \text{ (l/s)} \times H \text{ (m.c.l.)}}{75} \text{ in HP}$$

$$P_3 = \frac{\gamma \text{ (kg/dm}^3\text{)} \times Q \text{ (m}^3\text{/h)} \times H \text{ (m.c.l.)}}{270} \text{ in HP}$$

$$P_3 = \frac{\gamma \text{ (kg/dm}^3\text{)} \times Q \text{ (l/s)} \times H \text{ (m.c.l.)}}{102} \text{ in kW}$$

$$P_3 = \frac{\gamma \text{ (kg/dm}^3\text{)} \times Q \text{ (l/min)} \times H \text{ (m.c.l.)}}{4500} \text{ in HP}$$

$$P_3 = \frac{\gamma \text{ (kg/dm}^3\text{)} \times Q \text{ (m}^3\text{/h)} \times H \text{ (m.c.l.)}}{367} \text{ in kW}$$

$$P_3 = \frac{\gamma \text{ (kg/dm}^3\text{)} \times Q \text{ (l/min)} \times H \text{ (m.c.l.)}}{6120} \text{ in kW}$$

POWER ABSORBED

Absorbed power means the power used by the motor to give the liquid what was called 'power output' above.

Not all absorbed power becomes power output because a part of it is dissipated in friction and another part, even more significant, is lost inside of the pump itself due to hydraulic leaks. Therefore, clearly the power output will always be less than that absorbed and their ratio shall always be less than 1. This number is called efficiency.

EFFICIENCY

Pump efficiency is obtained by dividing the power output by the absorbed power and commonly expressed as a percentage. For example, pump efficiency of 75% means that only 75% of the power absorbed becomes power output, with the remaining 25% being lost as it is dissipated in friction. Clearly, the higher the efficiency of the pump then the less power absorbed is lost. Then if one considers that the cost of the power is that concerning the power absorbed, then it is immediately clear how important efficiency is. Looking at two pumps with the same power output of 1 HP with an efficiency of 50% for one and 60% for the other, it may be deduced that the first needs 2 Hp to supply 1 HP while for the second only 1.67 HP is needed. This means that pump efficiency expresses the quality of the pump and its savings in terms of operational costs better than almost any other parameter.

EFFICIENCY CALCULATION

P1: is the power absorbed by the motor in kW (generally indicated by a watt meter)

P2: is the output power by the motor in kW. This is measured at the brake (practically, this is the power absorbed by the pump)

P3: is the power absorbed by the pump in kW

$$\text{Motor efficiency } \eta = \frac{P_2}{P_1}$$

$$\text{Motor efficiency } \eta = \frac{P_3}{P_2}$$

$$\text{Motor efficiency } \eta = \frac{P_3}{P_1}$$

PUMP HEAD AND ITS MEASUREMENT

What is meant by a pump's head is always and only the differential given by the same pump, which is generally expressed in metres. To measure the head of a surface pump, it is necessary to measure, during operation, the value of the head at the outlet, making sure to refer the values of the readings to a single level, called the plane of reference. Now, depending on the installation there may one of two cases:

- 1) the value read at the suction inlet is negative (i.e., less than zero on the pressure gauge). this is the case when the level of the liquid drawn is lower than the suction inlet.
- 2) the value read at the suction inlet is positive (ie, greater than zero on the pressure gauge). this is the case when the level of the liquid drawn is higher than the suction inlet (submerged operation).

In the first case, the pump head is given by the sum of the two readings. In the second case it is given by the head value at the discharge outlet less the value at the suction inlet.

Then, it is necessary to check that the values read at the pump inlet and outlet refer to the same diameter, so that the different speed values are not distorted in the measurement section. Any correction shall be made through the calculation of the dynamic head, which is that part of the head linked to the speed of the liquid, ie, that part of the head that the liquid possesses in the measurement section because it is moving. The dynamic Hd head, expressed in metres, is given by the following formula:

$$H_d = \frac{v^2}{2g}$$

where: v = speed of the fluid at the point of measurement, expressed in m/s
 g = acceleration of gravity (9.81) expressed in m/s²
 $2g = 2 \times 9.81 = 19.62$ m/s²

The head correction term is given by the difference between the dynamic head at the discharge outlet and the the dynamic head at the suction inlet. Clearly if the measurements upstream and downstream of the pump are taken on pipes of equal diameter, ie, with the liquid moving at the same speed, the correction term will be zero.

To measure the head of a pump with the impeller submerged it is sufficient to measure, during the pump operation, the head at the discharge outlet. In this case, the pump head is given by the sum of the value read with the dynamic head. (still at the discharge outlet) and with the difference of the level of the free surface of the liquid drawn and the pressure gauge.

PUMP PERFORMANCE AT DIFFERENT RPM

The pump's revolutions n notably influences its performance. Not considering any cavitation phenomena, the law of similars applied, expressed:

$$Q_x = Q \times \frac{n_x}{n}$$

$$H_x = H \times \left(\frac{n_x}{n}\right)^2$$

$$P_{2-x} = P_2 \times \left(\frac{n_x}{n}\right)^3$$

For example, doubling the number of revolutions (n_x) one gets:

Q_x = the value of the flow rate doubles

H_x = the value of the head quadruples

P_{2-x} = the Power absorbed by Pump increases 8 times

$Q - H - P_2$ are values referring to speed n

$Q_x - H_x - P_{2-x}$ are values referring to speed n_x .

NOTIONS ON ELECTRIC PUMP MOTORS

SYMBOL KEY	
P_1	= POWER ABSORBED BY THE MOTOR IN KW
P_2	= POWER OUTPUT BY THE MOTOR IN KW OR HP
$V \sim$	= AC VOLTAGE POWER SUPPLY
Hz	= FREQUENCY IN PERIODS/DEPENDIMNG ON THE POWER SUPPLY VOLTAGE
I	= CURRENT ABSORBED BY THE MOTOR IN AMPERES
$\cos\varphi$	= POWER FACTOR
$n^{1/min}$	= ROTATION SPEED IN RPM
η	= EFFICIENCY (RATIO OF POWER OUTPUT AND POWER ABSORBED P_2/P_1)
p	= NUMBER OF POLES ON THE MOTOR
Cn	= MOTOR RATED TORQUE

ROTATION SPEED W/NO LOAD

The rotation speed of single phase or three phase induction electric motors w/no load is calculated as follows:

$$n^{1/min} = \frac{120 \times \text{Hz}}{p}$$

Rotation speed w/no load $n^{1/min}$

FREQUENZCY HZ	2 POLES	4 POLES
50	3000	1500
60	3600	1800

The speed at full load is 2% to 7% less than w/no load (2% ÷ 7% slippage).

CURRENT ABSORBED

$$\text{Single phase: } I = \frac{1000 \times P_2 \text{ (kW)}}{V \times \cos\varphi \times \eta} \quad \text{or: } I = \frac{736 \times P_2 \text{ (HP)}}{V \times \cos\varphi \times \eta}$$

$$\text{Three phase: } I = \frac{1000 \times P_2 \text{ (kW)}}{1.73 \times V \times \cos\varphi \times \eta} \quad \text{or: } I = \frac{736 \times P_2 \text{ (HP)}}{1.73 \times V \times \cos\varphi \times \eta}$$

POWER ABSORBED

$$\text{Single phase: } P_1 \text{ (kW)} = \frac{V \times I \times \cos\varphi}{1000}$$

$$\text{Three-phase: } P_1 \text{ (kW)} = \frac{1.73 \times V \times I \times \cos\varphi}{1000}$$

POWER OUTPUT AT MOTOR SHAFT

$$\text{Single phase: } P_2 \text{ (kW)} = \frac{V \times I \times \cos\varphi \times \eta}{1000} \quad \text{or: } P_2 \text{ (HP)} = \frac{V \times I \times \cos\varphi \times \eta}{736}$$

$$\text{Three-phase: } P_2 \text{ (kW)} = \frac{1.73 \times V \times I \times \cos\varphi \times \eta}{1000} \quad \text{or: } P_2 \text{ (HP)} = \frac{1.73 \times V \times I \times \cos\varphi \times \eta}{736}$$

EFFICIENCY

$$\eta = \frac{P_2 \text{ (kW)}}{P_1 \text{ (kW)}}$$

POWER FACTOR

$$\text{Single phase: } \cos\varphi = \frac{P_2 (\text{kW}) \times 1000}{V \times I \times \eta} \quad \text{or: } \cos\varphi = \frac{P_1 (\text{kW}) \times 1000}{V \times I}$$

$$\text{Three-phase: } \cos\varphi = \frac{P_2 (\text{kW}) \times 1000}{1.73 \times V \times I \times \eta} \quad \text{or: } \cos\varphi = \frac{P_1 (\text{kW}) \times 1000}{1.73 \times V \times I}$$

RATED TORQUE

$$C_n = \frac{P_2 (\text{kW}) \times 1000}{1.027 \times n^{1/\text{min}}} \text{ in Kg}$$

$$C_n = \frac{P_2 (\text{HP}) \times 736}{1.027 \times n^{1/\text{min}}} \text{ in Kg}$$

$$C_n = \frac{702 \times \text{HP}}{n^{1/\text{min}}} \text{ in Deca Newton Meter}$$

RELATION BETWEEN KW AND HP

$$1 \text{ HP} = 0.736 \text{ kW} \quad 1 \text{ kW} = 1.36 \text{ HP} \quad \frac{\text{HP}}{1.36} = \text{kW} \quad \text{kW} \times 1.36 = \text{HP}$$

PEAK CURRENT (IP)

Peak current at start up is greater than rated current by 4 to 8 volts depending on the power of the motor
 $I_{sp} = I_n \times 4 \div 8$

NOTES ON ELECTRICAL CAPACITORS

The approximate current absorbed by a capacitor is:

$$I = \frac{6.28 \times F \times C \times V}{1,000,000}$$

Where:

- I = current in amperes absorbed by a capacitor
- F = frequency in Hz from the rated voltage
- C = capacitor capacity in μF
- V = rated voltage

Example:

The approximate current absorbed by a 14 μF capacitor connected to 220 Volt - 50 Hz power, will be:

$$I = \frac{6.28 \times 50 \times 14 \times 220}{1,000,000} = 0.96 \text{ Ampere}$$


The approximate capacity of a capacitor is determined:

$$C = \frac{I}{6.28 \times F \times V} \times 1,000,000$$

Example:

The capacity of a capacitor that absorbs 1.4 Amperes connected to 220 Volt - 50 Hz power, will be:

$$C = \frac{1.4}{6.28 \times 50 \times 220} \times 1,000,000 = 20.2 \mu\text{F}$$

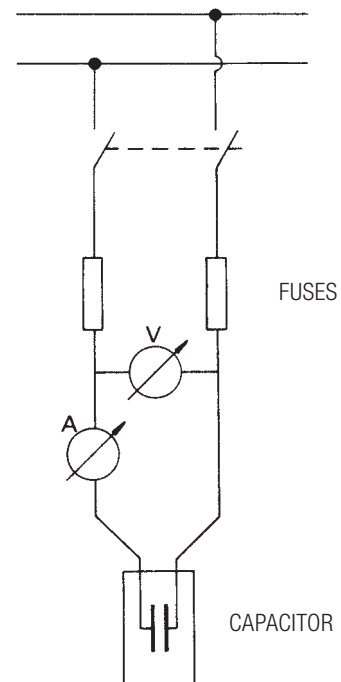

STAR-DELTA STARTER

The motor normally connected to delta Δ is connected to the network by a star connection. The current and the starting torque are reduced by 1/3 of the level it would have been with just the delta Δ connection.

PROTECTION

It is suggested that the motors in the network are connected to thermal magnetic circuit breakers in a fuse circuit pursuant to the standards of that country.

LOSS OF HEAD AND SPEED TABLE

To calculate the **head losses** accurately **and the speed** use this table:

FLOW RATE			NEW GALVANIZED PIPES									
			NOMINAL DIAMETERS: INCHES AND mm									
l/s	l/min	m ³ /h	1/2"	3/4"	1"	1"1/4	1"1/2	2"	2"1/2	3"	3"1/2	4"
			15.75	21.25	27	35.75	41.25	52.5	68	80.25	92.5	105
0.17	10	0.6	0.856	0.47	0.291							
			9.01	20.9	0.65							
0.25	15	0.9	1.284	0.705	0.4387	0.249				HAZEN WILLIAMS FORMULA (UNI 9489 13.3.3.6)		
			19.07	4.43	1.38	0.35						
0.33	20	1.2	1.712	0.94	0.582	0.332	0.25					
			32.47	7.55	2.35	0.6	0.3					
0.42	25	1.5	2.14	1.175	0.728	0.415	0.31					
			49.06	11.41	3.55	0.91	0.45					
0.5	30	1.8	2.568	1.411	0.874	0.498	0.37	0.23				
			68.74	15.98	4.98	1.27	0.63	0.2				
0.58	35	2.1	2.996	1.646	1.019	0.581	0.44	0.27				
			91.42	21.26	6.62	1.69	0.84	0.26				
0.67	40	2.4		1.881	1.165	0.664	0.5	0.31				
				27.22	8.48	2.16	1.08	0.33				
0.83	50	3		2.351	1.456	0.831	0.62	0.39	0.23			
				41.13	12.81	3.27	1.63	0.5	0.14			
1	60	3.6		2.821	1.747	0.997	0.75	0.46	0.28			
				57.63	17.95	4.58	2.28	0.7	0.2			
1.17	70	4.2		3.291	2.039	1.163	0.87	0.54	0.32	0.23		
				76.64	23.88	6.08	3.03	0.94	0.27	0.12		
1.33	80	4.8			2.33	1.329	1	0.62	0.37	0.26		
					30.57	7.79	3.88	1.2	34	0.15		
1.5	90	5.4			2.621	1.495	1.12	0.69	0.41	0.3		
					38.01	9.69	4.83	1.49	0.42	0.19		
1.67	100	6			2.912	1.661	1.25	0.77	0.46	0.33	0.25	
					46.19	11.77	5.86	1.81	0.51	0.23	0.11	
2.08	125	7.5			3.641	2.077	1.56	0.96	0.57	0.41	0.31	0.24
					69.79	17.79	8.86	2.74	0.78	0.35	0.17	0.09
2.5	150	9				2.492	1.87	1.16	0.69	0.49	0.37	0.29
						24.92	12.41	3.84	1.09	0.49	0.24	0.13
2.92	175	10.5				2.907	2.18	1.35	0.8	0.58	0.43	0.34
						33.15	16.51	5.1	1.45	0.65	0.32	0.17

Numbers in white: Head loss in m. for each 100 m. of piping

Numbers in green: Water speed in m/sec

The table refers to galvanized pipe.

For different materials multiply by:

- 0.6 for PVC pipe
- 0.7 for aluminium pipe
- 0.8 for laminated steel and stainless pipe

LOSS OF HEAD AND SPEED TABLE

To calculate the **head losses** accurately **and the speed** use this table:

FLOW RATE			NEW GALVANIZED PIPES										
			NOMINAL DIAMETERS: INCHES AND MM										
l/s	l/min	m ³ /h	1"1/4	1"1/2	2"	2"1/2	3"	3"1/2	4"	5"	6"	8"	
			35.75	41.25	52.5	68	80.25	92.5	105	130	155	206	
3.33	200	12	3.322	2.5	1.54	0.92	0.66	0.5	0.39	0.25			
			42.43	21.14	6.53	1.85	0.83	0.41	0.22	0.08			
4.17	250	15	4.156	3.12	1.93	1.15	0.82	0.62	0.48	0.31			
			64.12	31.94	9.87	2.8	1.25	1.63	0.34	0.12			
5	300	18	3.74	2.31	1.38	0.99	0.74	0.58	0.38	0.27			
			44.75	13.83	3.92	1.75	0.88	0.47	0.17	0.07			
6.67	400	24	4.99	3.08	1.84	1.32	0.99	0.77	0.5	0.35			
			76.2	23.55	6.68	2.98	1.49	0.8	0.28	0.12			
8.33	500	30	3.85	2.3	1.65	1.24	0.96	0.63	0.44				
			35.58	10.09	4.51	2.26	1.22	0.43	0.18				
10	600	36	4.62	2.75	1.98	1.49	1.16	0.75	0.53	0.3			
			49.85	14.14	6.31	3.16	1.7	0.6	0.26	0.06			
11.67	700	42	3.21	2.31	1.74	1.35	0.88	0.62	0.35				
			18.81	8.4	4.2	2.27	0.8	0.34	0.09				
13.33	800	48	3.67	2.64	1.99	1.54	1.01	0.71	0.4				
			24.08	10.75	5.38	2.9	1.03	0.44	0.11				
15	900	54	4.13	2.97	2.23	1.73	1.13	0.8	0.45				
			29.94	13.37	6.69	3.61	1.28	0.54	0.14				
16.67	1000	60	4.59	3.3	2.48	1.93	1.26	0.88	0.5				
			36.39	16.24	8.13	4.39	1.55	0.66	0.16				
20.83	1250	75	4.12	3.1	2.41	1.57	1.1	0.63					
			24.54	12.29	6.63	2.34	0.99	0.25					
25	1500	90	4.95	3.72	2.89	1.88	1.33	0.75					
			34.39	17.22	9.29	3.28	1.39	0.35					
29.17	1750	105	4.34	3.37	2.2	1.55	0.88						
			22.9	12.35	4.37	1.85	0.46						
33.33	2000	120	4.96	3.85	2.5	1.77	1						
			29.31	15.81	5.59	2.37	0.59						
41.67	2500	150	4.81	3.14	2.21	1.25							
			23.89	8.44	3.59	0.9							
50	3000	180	HAZEN WILLIAMS FORMULA (UNI 9489 13.3.3.6)				3.77	2.65	1.5				
							11.83	5.02	1.26				
66.67	4000	240	HAZEN WILLIAMS FORMULA (UNI 9489 13.3.3.6)				5.03	3.53	2				
							20.15	8.55	2.14				
83.33	5000	300	HAZEN WILLIAMS FORMULA (UNI 9489 13.3.3.6)				4.42	2.5					
							12.93	3.23					

Numbers in white: Head loss in m. for each 100 m. of piping

Numbers in green: Water speed in m/sec



The table refers to galvanized pipe.

For different materials multiply by:

- 0.6 for PVC pipe
- 0.7 for aluminium pipe
- 0.8 for laminated steel and stainless pipe

HEAD LOSSES

in centimetres water column in bends, shutters and valves

WATER SPEED IN m/sec	SHARP BENDS					CURVE NORMAL BENDS					NORMAL SHUTTERS	FOOT VALVES	CHECK VALVES	LOSS OF ENERGY AT THE OUTLET OF DRAIN PIPES $V^2/2g$
														
	$\alpha = 30^\circ$	$\alpha = 40^\circ$	$\alpha = 60^\circ$	$\alpha = 80^\circ$	$\alpha = 90^\circ$	$\frac{d}{R} = 0.4$	$\frac{d}{R} = 0.6$	$\frac{d}{R} = 0.8$	$\frac{d}{R} = 1$	$\frac{d}{R} = 1.5$				
0.10	0.03	0.04	0.05	0.07	0.08	0.07	0.08	0.01	0.0155	0.027	0.03	30	30	0.05
0.15	0.06	0.073	0.1	0.14	0.17	0.016	0.019	0.024	0.033	0.06	0.033	31	31	0.12
0.2	0.11	0.13	0.18	0.26	0.31	0.028	0.033	0.04	0.059	0.11	0.058	31	31	0.21
0.25	0.17	0.21	0.28	0.4	0.48	0.044	0.052	0.063	0.091	0.17	0.09	31	31	0.32
0.3	0.25	0.3	0.41	0.6	0.7	0.063	0.074	0.09	0.13	0.25	0.13	31	31	0.46
0.35	0.33	0.4	0.54	0.8	0.93	0.085	0.10	0.12	0.18	0.33	0.18	31	31	0.62
0.4	0.43	0.52	0.71	1.0	1.2	0.11	0.13	0.16	0.23	0.43	0.23	32	31	0.82
0.5	0.67	0.81	1.1	1.6	1.9	0.18	0.21	0.26	0.37	0.67	0.37	33	32	1.27
0.6	0.97	1.2	1.6	2.3	2.8	0.25	0.29	0.36	0.52	0.97	0.52	34	32	1.84
0.7	1.35	1.65	2.2	3.2	3.9	0.34	0.40	0.48	0.70	1.35	0.7	35	32	2.5
0.8	1.7	2.1	2.8	4.0	4.8	0.45	0.53	0.64	0.93	1.7	0.95	36	33	3.3
0.9	2.2	2.7	6	5.2	6.2	0.57	0.67	0.82	1.18	2.2	1.2	37	34	4.2
1.0	2.7	3.3	4.5	6.4	7.6	0.7	0.82	1.0	1.45	2.7	1.45	38	35	5.1
1.5	6.0	7.3	10.0	14.0	17.0	1.6	1.9	2.3	3.3	6.0	3.3	47	40	11.5
2.0	11.0	14.0	18.0	26.0	31.0	2.8	3.3	4.0	5.8	11.0	5.8	61	48	20.4
2.5	17.0	21.0	28.0	40.0	48.0	4.4	5.2	6.3	9.1	17.0	9.1	78	58	32.0
3.0	25.0	30.0	41.0	60.0	70.0	6.3	7.4	9.0	13.0	25.0	13.0	100	71	46.0
3.5	33.0	40.0	55.0	78.0	93.0	8.5	10.0	12.0	18.0	33.0	18.0	123	85	62.0
4.0	43.0	52.0	70.0	100.0	120.0	11.0	13.0	16.0	23.0	42.0	23.0	150	100	82.0
4.5	55.0	67.0	90.0	130.0	160.0	14.0	21.0	26.0	37.0	55.0	37.0	190	120	103.0
5.0	67.0	82.0	110.0	160.0	190.0	18.0	29.0	36.0	52.0	67.0	52.0	220	140	127.0

v = water speed in metres per second

d = tube diameter in metres

h = head loss in centimetres of water column for each metre of pipe calculated using the Lang formula:



$$h = \lambda \times \frac{100}{d} \times \frac{v^2}{2g} \quad \lambda = 0.02 + \frac{0.0018}{\sqrt{v \times d}}$$

Head loss in bends is only due to the contraction of the liquid flow from the direction change (the development of the bends should be included in the length of the pipe) while the loss of head in the valves and shutters was determined by technical tests.

Head loss from shutters and normal bends is equal to that of 5 metres of straight pipe while for check and clapet valves it is equal to 15 metres.

The values indicated are for completely smooth internal wall pipe. In the event of encrustation, the following increases should be considered.


STEAM TENSION AND SPECIFIC WEIGHT OF WATER AS A FUNCTION OF THE TEMPERATURE

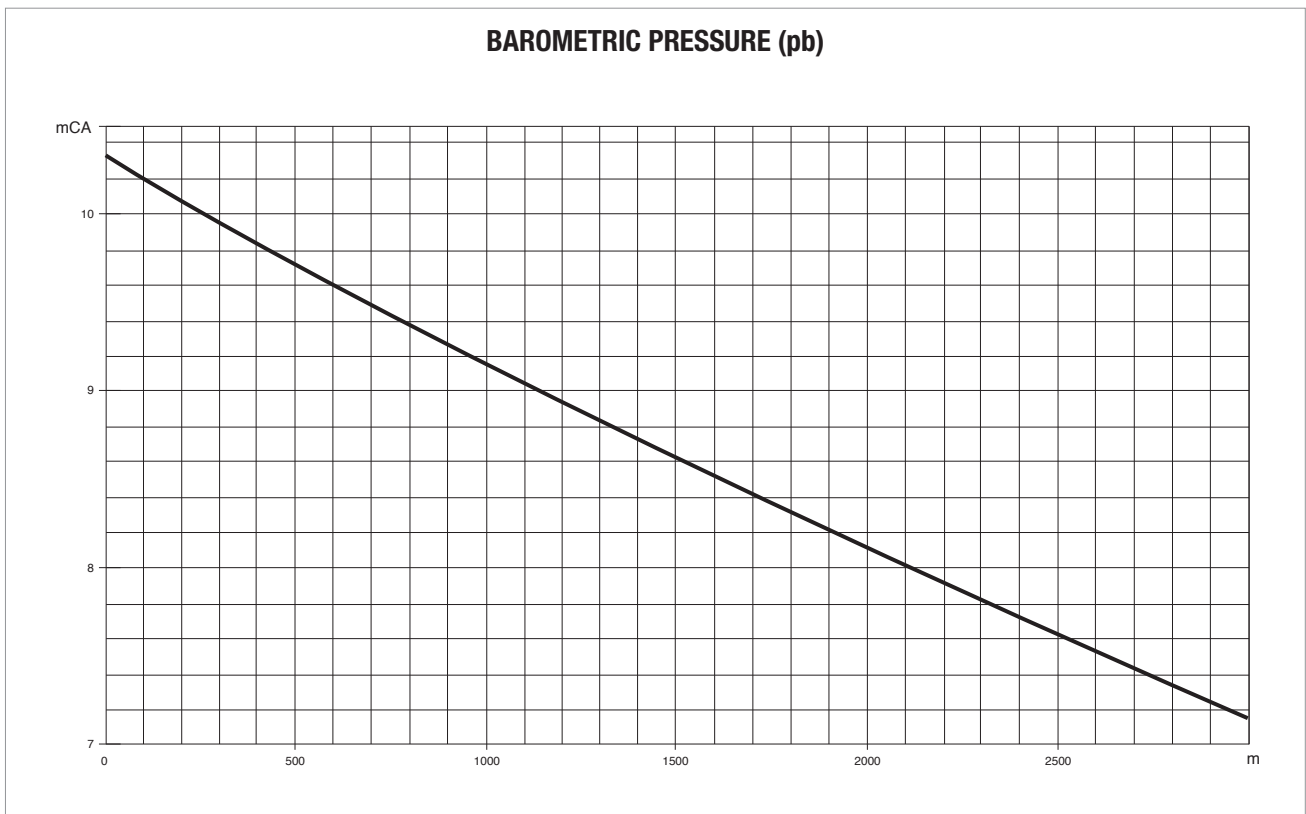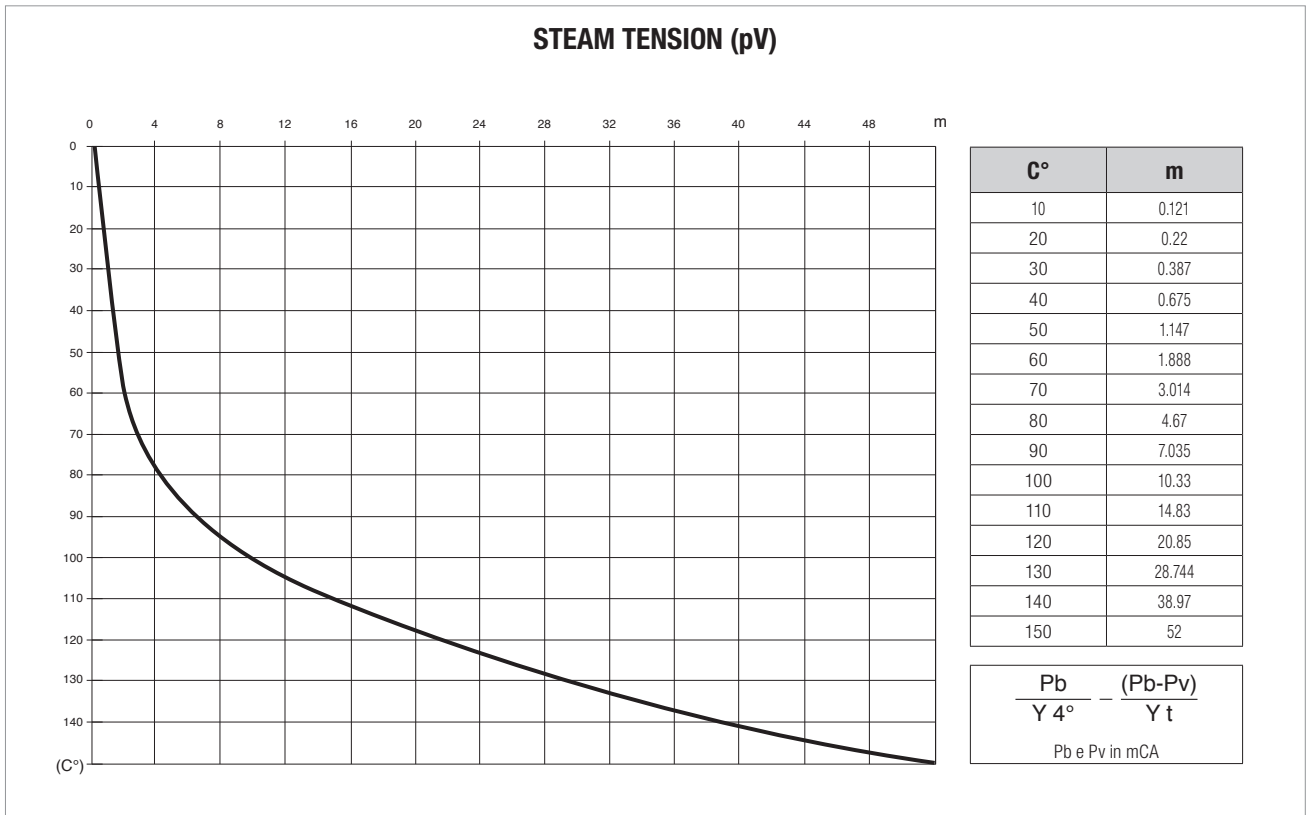

UNITS OF MEASURE CONVERSION TABLE

SIZE	SYSTEM UNITS OF MEASURE	UNITS OF MEASURE	SYMBOL	CONVERSIONS		
				TECHNICAL SYSTEM	INTERNATIONAL SYSTEM (SI)	ENGLISH SYSTEM
LENGTH	Technical and International	metre decimetre centimetre millimetre	m dm cm mm	1 dm = 0.1 m 1 cm = 0.01 m 1 mm = 0.001 m		1 m = 3.28 ft 1 dm = 3.937 in 1 cm = 0.3937 in
	English	inch foot yard	1", in 1', ft yd	1" = 25.4 mm 1" ft = 0.3048 m 1 yd = 0.9144 m		1 ft = 12" 1 yd = 3 ft = 26"
SURFACE AREA	Technical and International	square metre square centimetre square millimetre	m ² cm ² mm ²	1 cm ² = 0,0001 m ² 1 mm ² = 0.01 cm ²		1 m ² = 1.196 sq.yd 1 m ² = 10.764 sq.ft 1 cm ² = 0.155 sq.in
	English	square inch square foot square yard	sq. in sq. ft sq. yd	1 sq.in = 6,45 cm ² 1 sq.ft = 0,0929 m ² 1 sq.yd = 0,836 m ²		1 sq.ft = 144 sq.in 1 sq.yd = 1.296 sq.in 1 sq.yd = 9 sq.ft
VOLUME	Technical and International	cubic metre cubic decimetre cubic centimetre litre	m ³ cm ³ mm ³ l	1 m ³ = 1.000 dm ³ 1 cm ³ = 0.001 m ³ = 1.000 cm ³ 1 mm ³ = 0.001 dm ³ 1 l = dm ³		1 dm ³ = 0.22 Imp. gal 1 dm ³ = 0.264 US. gal 1 dm ³ = 61.0 cu.in
	English	cubic inch cubic foot Imp. gallon US gallon	cu. in cu. ft Imp. gal US gal	1 sq.in = 16.39 cm ³ 1 cu.ft = 28,34 m ³ 1 Imp.gal = 4,546 m ³ 1 US.gal = 3,785 dm ³		1 Imp.gal = 1.201 US.gal 1 US.gal = 0.833 Imp.gal
TEMPERATURE	Technical and International	degrees centigrade degrees Kelvin	°C °K	°C = °K - 273 °K = °C + 273		°C = 5/9 x (°F - 32) °K = 5/9 x (°F - 32) + 273
	English	degrees Fahrenheit	°F	°F = 9/5 x °C + 32		-
		Freezing point of water at atmospheric pressure: Boiling point of water at atmospheric pressure:		000°C = 273 °K = 032 °F 100°C = 373 °K = 212 °F		
WEIGHT e FORCE	Technical	kilogram	kg	-	1 kg = 9.81 N	1 kg = 2.203 lb
	International	Newtons	N	1 N = 0.102 kg	-	1 N = 0.22546 lb
	English	pound	lb	1 lb = 0.454 kg	1 lb = 4.452 N	-
WEIGHT SPECIFIC	Technical	kilogram per cubic decimetre	kg/dm ³	-	1 kg/dm ³ = 9.807 N/dm ³	1 kg/dm ³ = 62,46 lb/cu.ft
	International	Newton over cubic decimetre	N/dm ³	1 N/dm ³ = 0.102 kg/dm ³	-	1 N/dm ³ = 6.36 lb/cu.ft
	English	pound per cubic foot	lb/dm ³	1 lb/cu.ft = 0.01600 kg/dm ³	1 lb/cu.ft = 0160 N/dm ³	-
PRESSURE	Technical	technical atmosphere	kg/cm ²	-	1 kg/cm ² = 98,067 kPa 1 kg/cm ² = 0,9807 bar	1 kg/cm ² = 14.22 psi
	International	Pascal kiloPascal bar	Pa kPa bar	1 kPa = 0,0102 kg/cm ² 1 bar = 1.02 kg/cm ²	1 kPa = 1.000 Pa 1 bar = 100.000 Pa	1 kPa = 0,145 psi 1 bar = 14,50 psi
	English	pound per square inch	psi	1 psi = 0,0703 kg/cm ²	1 psi = 0,06895 bar 1 psi = 6,894 kPa	-
FLOW RATE	Technical	litres per minute litres per second cubic metres per hour	l/min l/s m ³ /h	1 l/min = 0.0167 l/s 1 l/s = 3.6 m ³ /h 1 m ³ /h = 16,667 l/min	1 l/s = 0,001 m ³ /s	1 l/min = 0.22 Imp.g.p.m. 1 l/min = 0.264 US.g.p.m. 1 m ³ /h = 3,666 Imp.g.p.m. 1 m ³ /h = 4.403 US.g.p.m.
	International	cubic metres per second	m ³ /s	1 m ³ /s = 1.000 l/s 1 m ³ /s = 3.600 m ³ /h	-	1 m ³ /s = 13.198 Imp.g.p.m. 1 m ³ /s = 15.852 US.g.p.m.
	English	Imperial gallon per minute US gallon per minute	Imp.g.p.m. US.g.p.m.	1 Imp.g.p.m. = 4,546 l/min 1 Imp.g.p.m. = 0,273 m ³ /h 1 US.g.p.m. = 3,785 l/min 1 US.g.p.m. = 0,227 m ³ /h	-	1 Imp.g.p.m. = 1.201 US.g.p.m. 1 US.g.p.m. = 0.833 Imp.g.p.m.
TORQUE MOMENT	Technical	kilogram per metre	kgm	-	1 kg = 9.807 Nm	1 kgm = 7,233 ft.lb
	International	Newton per metre	Nm	1 Nm = 0.102 kg	-	1 Nm = 0,7376 ft.lb
	English	foot pound	ft.lb	1 ft.lb = 0.138 kg	1 ft.lb = 1,358 Nm	-
WORK ed ENERGY	Technical	kilogram per metre horsepower per hour	kgm CVh		1 kg = 9.807 J 1 CVh = 0,736 kWh	1 kgm = 7,233 ft.lb 1 Nm = 0,986 HP.hr.
	International	Joule kilowatt hour	J kWhq	1 J = 0.102 kg kWh = 1,36 CVh	-	1 Nm = 0,7376 ft.lb 1 Nm = 0,7376 ft.lb
	English	foot pound Horsepower hour	ft.lb HP.hr.	1 ft.lb = 0.138 kg 1 HP.hr. = 1,014 CVh	1 ft.lb = 0.358 Nm 1 HP.hr. = 0.746 kWh	-
POWER	Technical	Horsepower	HP	1 HP = 0.736 kW	1 HP = 736 W	-
	International	Watts kiloWatts	W kW	1 W = 0.00136 Hp 1 kW = 1.36 Hp	1 kW = 1.000 W	-
KINEMATIC VISCOSITY	Technical	stokes centistokes	1 St 1 cSt	1 St = 1 cm ² /s 1 cSt = 0,01 St	1 St = 0,0001 m ² /s	1 St = 0.00107 ft ² /s
	International	m ² /s	m ² /s	1 m ² /s = 10.000 St	1 m ² /s = 10.000 cm ² /s	1 m ² /s = 10,764 ft ² /s
	English	square feet per second	ft ² /s	1 ft ² /s = 929 St	1 ft ² /s = 0,0929 m ² /s	-

NOTES

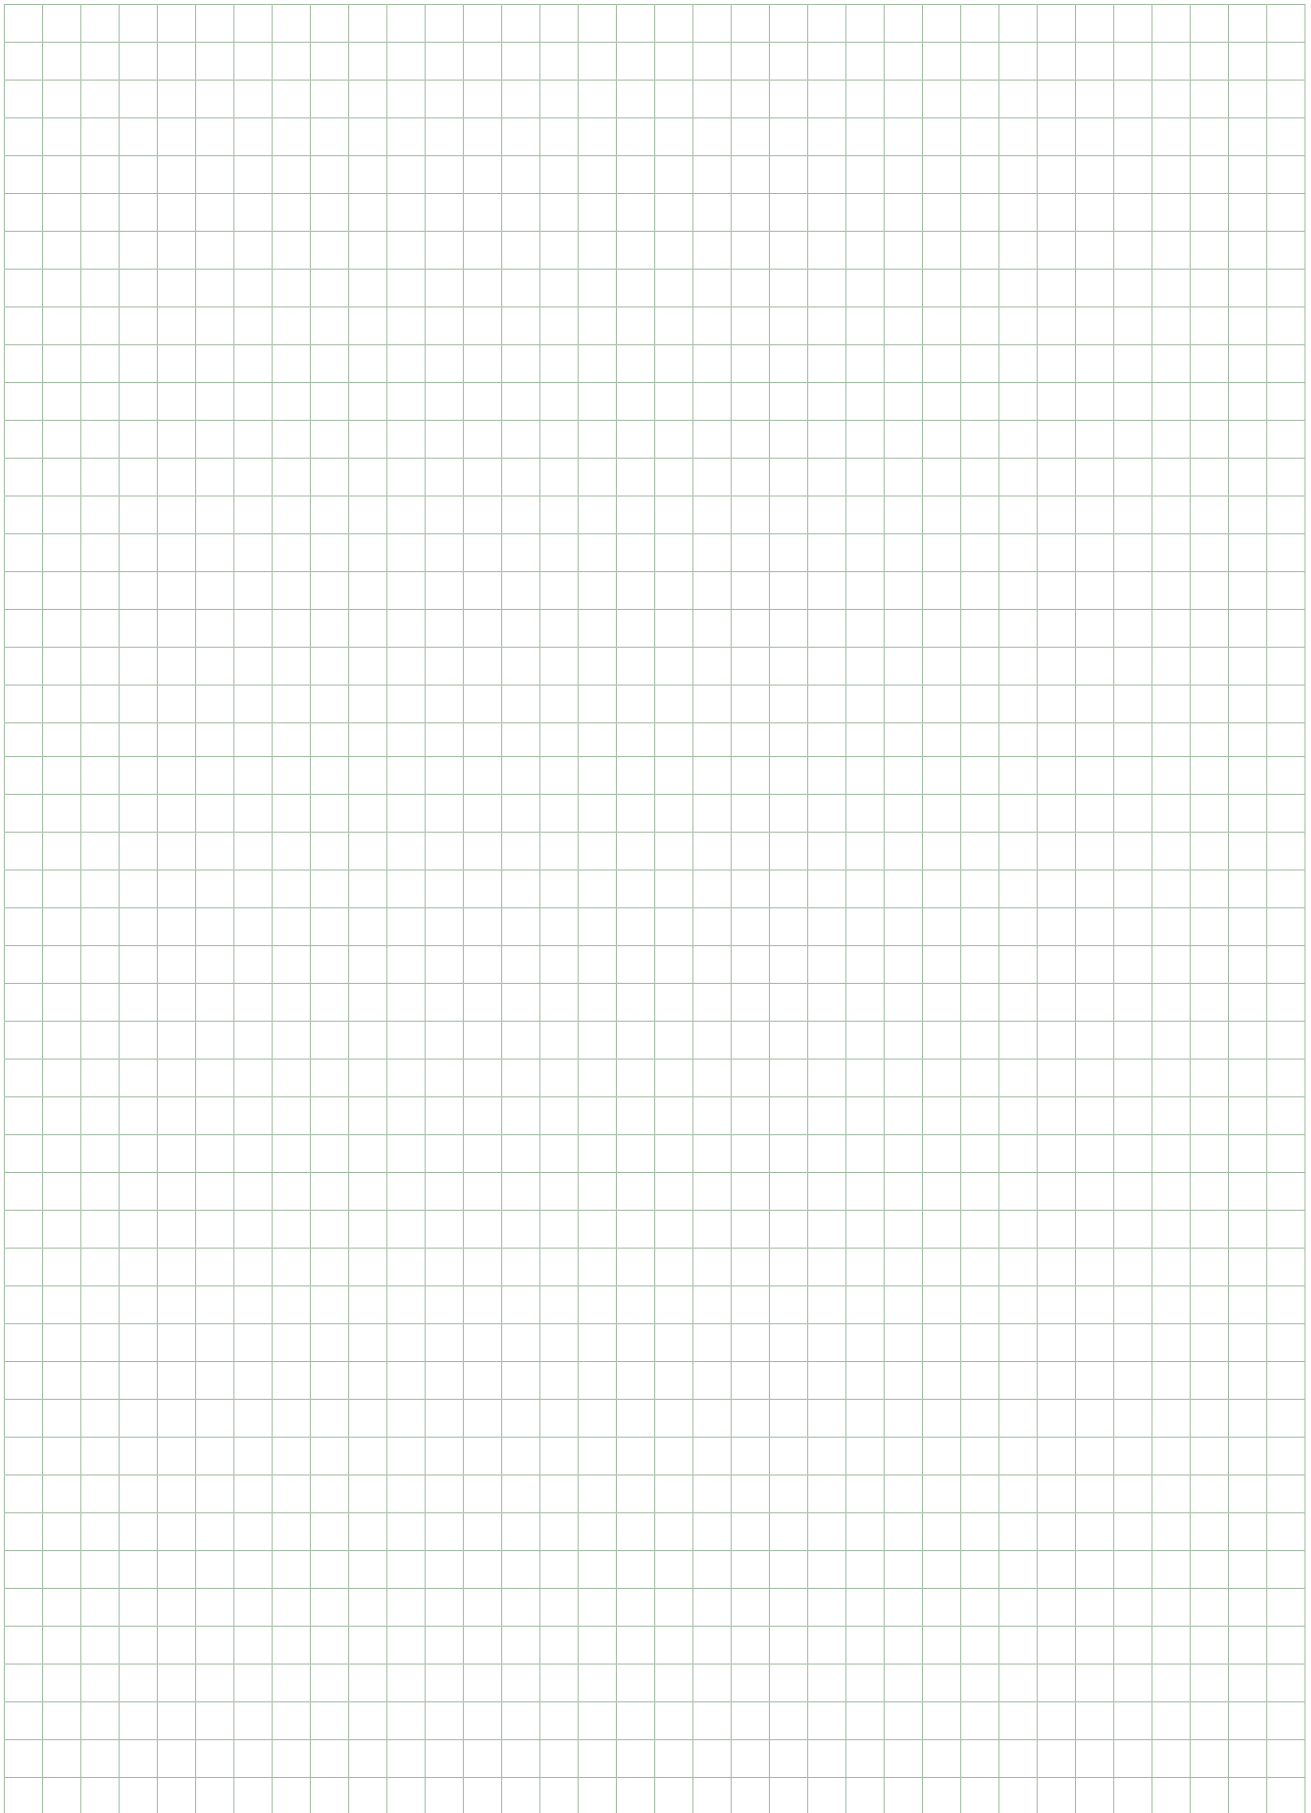

DNA
PUMPS SELECTOR

Online product selection



DAB PUMPS LTD.

Unit 4 and 5, Stortford Hall Industrial Park,
Dunmow Road,
Bishops Stortford,
Herts
CM23 5GZ - UK
salesuk@dwtgroup.com
Tel. +44 1279 652 776
Fax +44 1279 657 727



DAB PUMPS IBERICA S.L.

Avenida de Castilla nr.1 Local 14
28830 - San Fernando De Henares - Madrid
Spain
info.spain@dwtgroup.com
Tel. +34 91 6569545
Fax: +34 91 6569676



DAB PUMPS INC.

3226 Benchmark Drive
Ladson, SC 29456 - USA
info.usa@dwtgroup.com
Tel. 1-843-824-6332
Toll Free 1-866-896-4DAB (4322)
Fax 1-843-797-3366



DAB PUMPS B.V.

Brusselstraat 150
B-1702 Groot-Bijgaarden - Belgium
info.belgium@dwtgroup.com
Tel. +32 2 4668353
Fax +32 2 4669218



DAB PRODUCTION HUNGARY KFT.

H-8800
Nagykanizsa, Buda Ernő u.5
Hungary
Tel. +36 93501700



DWT SOUTH AFRICA

Podium at Menlyn,
3rd Floor, Unit 3001b, 43 Ingersol Road,
C/O Lois and Atterbury street,
Menlyn, Pretoria, 0181 - South-Africa
info.sa@dwtgroup.com
Tel. +27 12 361 3997
Fax +27 12 361 3137



DAB PUMPS B.V.

Albert Einsteinweg, 4
5151 DL Drunen - Nederland
info.netherlands@dwtgroup.com
Tel. +31 416 387280
Fax +31 416 387299



DAB PUMPS POLAND Sp. z o.o.

Mokotow Marynarska
ul. Postępu 15C
02-676 Warszawa - Poland
Tel. +48 223 81 6085



DAB PUMPS CHINA

No.40 Kaituo Road, Qingdao Economic & Technological
Development Zone
Qingdao City, Shandong Province - China
PC: 266500
info.china@dwtgroup.com
Tel. +8653286812030-6270
Fax +8653286812210



DAB UKRAINE Representative Office

Regus Horizon Park
4 M. Hrinchenka St, suit 147
03680 Kiev - Ukraine
Tel. +38 044 391 59 43



DAB PUMPEN DEUTSCHLAND GmbH

Tackweg 11
D - 47918 Tönisvorst - Germany
info.germany@dwtgroup.com
Tel. +49 2151 82136-0
Fax +49 2151 82136-36



OOO DAB PUMPS

Novgorodskaya str, 1, bld G, office 308
127247 Moscow - Russia
info.russia@dwtgroup.com
Tel. +7 495 122 00 35
Fax +7 495 122 00 36



DAB PUMPS DE MÉXICO, S.A. DE C.V.

Av Gral Álvaro Obregón 270, oficina 355
Hipódromo, Cuauhtémoc 06100
México, D.F.
Tel. +52 55 6719 0493